

# Model 266DRH Differential Model 266HRH Gauge Model 266NRH Absolute

Engineered solutions for all applications

Measurement made easy



## Base accuracy

- from 0.06 % of calibrated span

## Reliable sensing system coupled with very latest digital technologies

- provides large turn down ratio up to 60:1

## Comprehensive sensor choice

- optimize in-use total performance and stability

## Flexible configuration facilities

- provided locally via local LCD keypad

## New TTG (Through-The-Glass) keypad technology

- allows quick and easy local configuration without opening the cover, even in explosion proof environments

## IEC 61508 certification

- version for SIL2 (1oo1) and SIL3 (1oo2) applications

## PED compliance to Sound Engineering Practice (SEP)

## WirelessHART version

- the battery powered solution compliant to IEC 62591

## Best-in-class battery life

- up to 10 years @ 32 s update time
- in-field replaceable

## Product in compliance with Directive 2011/65/UE (RoHS II)

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## General description

Models detailed in this data sheet apply for those transmitters which include one or two remote seal(s) connected via a capillary to the transmitter sensor. Depending on the selected ordering code the following models are available:

a) model 266DRH which allows a differential measurement using either

- two remote seals of same type and size or
- one direct mount seal on positive side and one remote seal on negative side, of same type and size or
- one remote seal on positive and a standard threaded connection direct 1/4 in. – 18 NPT on flange or 1/2 in. – 14 NPT through adapter, for the wet or dry leg on negative side opposite to seal, or
- one direct mount seal on positive side and a standard threaded connection direct 1/4 in. – 18 NPT on flange or 1/2 in. – 14 NPT through adapter, for the wet or dry leg on negative side.

b) model 266HRH or 266NRH have the remote or direct mount seal on the positive side and the user can select the suitable code for having the reference at atmospheric or vacuum pressure respectively for gauge or absolute measure.

Direct mount seal is integral to the transducer by a short capillary connection inside a protective rigid tube. This construction forms a standalone single assembly suitable to be mounted to the process by the seal(s) mounting facilities.

All data apply for identical characteristics of the two sides when the transmitter is differential with two seals.

## Remote Seals Overview

The S26 seals are used in combination with 2600T transmitters, allowing differential, gauge or absolute pressure measurements.

Connection of the seal(s) to the relevant transmitter can be achieved as follows :

- directly mounted with a short capillary connecting the „integral“ seal to the transmitter sensor;
- through a capillary system which link the transmitter sensor to a „remote“ seal of any version.

Using seals the transmitter can be selected with

- two seals using same fill fluid, capillary and diaphragm size
- one seal having the other side configured with a process flange for wet/dry leg connection or a blind flange providing vacuum or atmospheric reference.

Model 266HR/NR transmitters have always one remote seal only, with a selectable reference to atmosphere or vacuum respectively for gauge or absolute pressure measurements.

The S26 Series Seal System is a protective device used to isolate 2600T series transmitters from the process fluid.

The seal system provides a flexible diaphragm seal between the process fluid and a liquid filled capillary tube connected to the body of the transmitter. The diaphragm isolates the process fluid while the filled capillary tube hydraulically transmits the process pressure to the transmitter sensor. The capillary of remote seal is corrosion-resistant with robust construction in stainless steel with spiral armour protection, also PVC jacket; PVC protection is always recommended except for high temperature application, where stainless steel armour is suggested. The all welded construction assures reliable operation over the widest range of operating temperature and under vacuum conditions.

For certain applications, use of seal is necessary to prevent the process fluid from leaving its enclosure, due to reasons such as :

- the process fluid has solids in suspension or is highly viscous and can foul impulse lines.
- the process fluid can solidify in impulse lines or the transmitter.
- the process fluid is too hazardous to enter the control area where the transmitter is located.
- the process temperature exceeds the recommended limits for the transmitter.
- the application is interface level or density measurement.

Remote seals offer the required constant and equal specific gravity of the pressure transfer fluid on the high and low sides of the transmitter.

- the transmitter must be located away from the process for easier maintenance.

The S26 series is available with process connections for ASME, EN or JIS pipe flanges, wedge flow elements, chemical tees, and threaded pipe fittings. Extended diaphragm remote seals, suitable for connection to 2in - 3in or 4in flanged tank nozzles or flanged tees, permit the seal diaphragm to be located flush with the inside of a tank or pipe. Sanitary type seals meet the stringent requirements of sanitary food, dairy, pharmaceutical and BioTech applications, offering FDA approved fillings and compliance with 3-A Sanitary Standards.

Fill fluids with FDA are defined as food fills and are Generally Recognized As Safe (GRAS) by the US Food and Drug Administration (FDA).

### **Seal system selection criteria**

Application of an S26 system in direct mount or remote seal configuration to 2600T transmitters affects performances of original devices. Effects are evident in:

- Accuracy
- Temperature effects
- Dynamic response

Accuracy is only marginally affected when seal diaphragm stiffness is relevant compared with sensor stiffness.

This is the only characteristic of the S26 system which has role on accuracy performance. High stiffness of diaphragm associated with low URL might produce increased errors of linearity, hysteresis, and long term stability; when diaphragm stiffness is accuracy related also temperature effects are significantly affected.

Some basic considerations on diaphragm stiffness help understanding effects introduced by S26 system associated with transmitters. This is physically defined by the ratio between the pressure variation applied to the diaphragm and the corresponding volume variation. The stiffness is not linear along the whole diaphragm volumetric displacement, but the S26 design is such to maintain the system linear within the service conditions of the transmitter such as:

- Operating pressure range
- Operating static pressure (for differential transmitters)
- Ambient and process temperature limits

Diaphragm stiffness is a function of material and thickness (elastic coefficient), diameter (type), convolution shape and geometry (design defined).

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

S26 system has effect on temperature performance of the complete transmitter. This effect is mostly on zero of the instrument and is produced by the expansion of the fill fluid into the closed volume formed by the transmitter flange cavity the capillary volume and the remote seal volume. This volume filled with a fluid with specific expansion coefficient; change in temperature of the measuring device produce a volume variation which is absorbed by the remote diaphragm, whose stiffness produces a change in the fluid pressure: this is the zero error. In real application the transmitter/seal system is not the same and stable temperature. Therefore the errors referred in this document for each type of diaphragm and different fluids should be taken as a reference for qualitative evaluation and not a true behaviour in normal application conditions. Should again be recognized that the stiffness of diaphragm and in this case, the thermal coefficient of fluid are the parameter to take into account.

Application of S26 seal to transmitters increases the original time response. The amount of the increase depends from the number of elements and condition of the instrument as follow:

- transmitter sensor range
- physical configuration (i.e. a remote seal on other side)
- type of measure/number of seal (one or two)
- fill fluid viscosity of the S26 system applied
- ambient temperature (affects the transmitter and the capillary) and process temperature on the seal diaphragm
- capillary length

The delay introduced by the seal may be considered as an added constant time to the one of the associated transmitter.

For obtaining the best application solution:

- choose sensor code with URL closest to application SPAN
- select largest diameter diaphragm seal related to URL.
- keep the capillary length as short as possible
- select the fill fluid that suits the most extreme process conditions expected (highest temperature and lowest pressure) and it is compatible with the process fluid.
- In vacuum application, choose always the all welded version and mount the transmitter primary 30 cm/12 inches or more below the bottom seal connection.
- In a two-seal system use the same diaphragm size, capillary length and fill fluid on each side of the transmitter

### Temperature errors optimization (option code DE)

Additional enhanced optimization performed during the production process allows to reduce errors caused by temperature changes on seal. Values detailed in relevant tables can be considered divided by 4 for the following conditions

- difference of capillary errors (per metre) when the two sides have different lengths
- difference of seal errors (process) when the two sides are equipped with different S26 types
- difference of system errors (ambient) when the transmitter uses one direct mount seal and one remote seal.

### Ordering Information

The transmitter and each seal system are each identified by a product code number. These code numbers are stamped on the transmitter nameplate and each character identifies specific product features. Refer to ordering information for a detailed explanation of the product code numbers.

Industrial application in chemical, sanitary, food and any other process industries may require seal configurations and/or process connection different from those reported in this document. Each "special" should be evaluated by ABB to check the correctness and its level of functionality. Ask for the "S26 series seal form" to define precisely the measuring problem and application requirements.

ABB can also cooperate with you by developing a special remote seal for problems requiring individual solutions.

PLEASE CONTACT YOUR LOCAL ABB OFFICE OR REPRESENTATIVE FOR ADDITIONAL INFORMATION, SPECIFIC SEAL DATA AND APPLICABILITY.



The following table shows the types of seals available as remote.

According to the combination SEAL/TRANSMITTER SENSOR the table details the MAXIMUM CAPILLARY LENGTH.

The mnemonics will be used as shortest cross references in the following pages of the data sheet.

Seal model	Seal type	Seal diaphragm size (thickness) [flange type]	Two seals construction								One seal construction								Mnemonic	
			SENSOR								SENSOR									
			B	E	F	H	M	P	Q	S	E	F	H	M	P	Q	S	W		Z
S26WA S26WE	Wafer (ASME and EN standards)	1.5 in. /DN 40	-	-	1	4	5	5	5	5	-	-	3	5	5	5	5	5	-	P1.5
		2 in. / DN 50	-	1	3	8	8	10	10	10	-	2	6	8	8	8	8	8	-	P2
		3 in. / DN 80	1.5	3	6	8	16	16	16	16	1	4	10	10	10	10	10	10	-	P3
		1.5 in. /DN 40 (low)	-	1	3	6	6	8	8	8	-	-	4	6	6	6	6	6	-	F1.5
		2 in. / DN 50 (low)	1	2	4	8	12	16	16	16	1	3	8	12	16	16	16	16	-	F2
		3 in. / DN 80 (low)	2	5	8	10	16	16	16	16	2	6	10	16	16	16	16	16	-	F3
S26FA S26FE S26RA S26RE	Flanged flush diaphragm (ASME and EN standards)	2 in. / DN 50	-	1	3	8	8	8	8	8	-	2	6	8	8	8	8	8	-	P2
		3 in. / DN 80	1.5	3	6	10	16	16	16	16	1	4	10	10	10	10	10	10	-	P3
		4 in. / DN 100	1.5	3	6	10	16	16	16	16	1	4	10	10	10	10	10	10	-	P3
		2 in. / DN 50 (low)	1	2	4	10	12	16	16	16	1	3	8	12	16	16	16	16	-	F2
		3 in. / DN 80 (low)	2	5	8	12	16	16	16	16	2	6	10	16	16	16	16	16	-	F3
		4 in. / DN 100 (low)	2	5	8	12	16	16	16	16	2	6	10	16	16	16	16	16	-	F3
	Flanged extended diaphragm (ASME and EN standards)	2 in. / DN 50	-	1	3	6	6	8	8	-	-	1	4	6	6	6	-	-	-	E2
		3 in. / DN 80	1	2	4	8	12	12	12	-	-	3	8	10	10	10	-	-	-	E3
		4 in. / DN 100	1.5	3	6	8	16	16	16	16	1	4	10	10	10	10	10	10	-	P3
		2 in. / DN 50 [fixed]	-	1	3	6	6	8	8	8	-	-	4	6	6	6	6	-	-	F1.5
S26RJ	Flanged flush diaphragm (JIS standards)	3 in. / DN 80 [fixed]	2	5	8	10	12	12	12	12	2	6	10	12	12	12	12	-	-	F2.5
		4 in. / DN100 [fixed]	2	5	8	10	12	12	12	12	2	6	10	12	12	12	12	-	-	F2.5
		A 50	-	-	3	8	8	8	8	8	-	2	6	8	8	8	8	-	-	P2
		A 80	1.5	3	6	8	16	16	16	16	1	4	10	10	10	10	10	-	-	P3
S26RR	Flanged flush diaphragm (Ring Joint ASME standard)	A 100	1.5	3	6	8	16	16	16	16	1	4	10	10	10	10	10	-	-	P3
		1.5 in.	-	-	-	4	5	5	5	5	-	-	3	5	5	5	5	5	-	P1.5
		2 in.	-	1	3	8	8	8	8	8	-	2	6	8	8	8	8	8	-	P2
S26RH	Flanged to ISO 10423 flush diaphragm (API)	3 in.	1.5	3	6	8	16	16	16	16	1	4	10	10	10	10	10	10	-	P3
		1 13/16 in.	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5	5	H1.5
S26CN	Flanged Chemical Tee	2 1/16 in.	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	8	8	P1.5
		3 in.	1.5	3	6	8	8	8	8	8	1	4	8	8	8	8	8	-	-	P3
S26TT	Threaded off-line flanged	2 1/2 in.	1	2	4	8	12	12	12	12	2	3	8	8	8	8	8	8	-	T2.5
S26MA	Off-line flanged (ASME and EN standards)	2 1/2 in.	1	2	4	8	12	12	12	12	2	3	8	8	8	8	8	-	-	T2.5
S26ME																				
S26SS	Union nut, Triclamp, Sanitary, Aseptic	2 in. / F50	-	-	1	3	6	6	6	-	-	1	3	6	6	6	-	-	-	S2
		3 in. / 4 in. / F80	1.5	3	6	10	10	10	10	-	3	6	10	10	10	10	-	-	-	S3
	Cherry Burrell, Cherry Burrell Aseptic	2 in.	-	-	1	3	6	6	6	-	-	1	3	6	6	6	-	-	-	S2.5
		3 in. / 4 in.	1.5	3	6	10	10	10	10	-	3	6	10	10	10	10	-	-	-	S3.5
S26VN	Saddle and Socket	2 1/2 in.	-	-	-	4	5	5	5	5	-	-	3	5	5	5	5	-	-	P1.5
S26UN	Union connection type	1 1/2 in.	-	-	-	-	-	-	-	-	-	-	3	5	5	5	5	-	-	Z1.5
S26BN	Button type	1 in.	-	-	-	-	-	-	-	-	-	-	-	-	3	3	3	-	-	B1
S26PN	Urea service flanged	1 1/2 in.	-	-	-	-	-	-	-	-	-	-	5	5	5	5	5	5	-	U1.5
		2 1/2 in.	-	-	3	6	6	6	6	6	-	3	6	6	6	6	6	6	-	U2.5

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

The following table shows the types of seals available as direct mount.

According to the combination SEAL/TRANSMITTER SENSOR the table details the compatibility for one direct mount seal construction and the MAXIMUM CAPILLARY LENGTH when a second seal is selected as remote.

The mnemonics will be used as shortest cross references in the following pages of the data sheet.

Seal model	Seal type	Seal diaphragm size (thickness) [flange type]	One direct mount seal									One DM plus one remote seal								Mnemonic	
			SENSOR									SENSOR									
			E	F	H	M	P	Q	S	W	Z	B	E	F	H	M	P	Q	S		
S26FA S26FE S26RA S26RE	Flanged flush diaphragm (ASME and EN standards)	2 in. / DN 50	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	1	3	5	8	8	8	8	P2	
		3 in. / DN 80	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	3	5	10	10	10	10	10	P3	
		4 in. / DN 100	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	3	5	10	10	10	10	10	P3	
		2 in. / DN 50 (low)	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	2	4	8	12	16	16	16	F2	
		3 in. / DN 80 (low)	Y	Y	Y	Y	Y	Y	Y	Y	Y	2	4	6	12	16	16	16	16	F3	
		4 in. / DN 100 (low)	Y	Y	Y	Y	Y	Y	Y	Y	Y	2	4	6	12	16	16	16	16	F3	
	Flanged extended diaphragm (ASME and EN standards)	2 in. / DN 50	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	4	6	6	6	-	E2
		3 in. / DN 80	Y	Y	Y	Y	Y	Y	-	-	-	-	2	3	8	10	10	10	-	E3	
		4 in. / DN 100	Y	Y	Y	Y	Y	Y	-	-	-	-	3	5	10	10	10	10	-	P3	
		2 in. / DN 50 [fixed]	-	-	Y	Y	Y	Y	Y	-	-	-	-	-	3	6	6	6	6	F1.5	
		3 in. / DN 80 [fixed]	Y	Y	Y	Y	Y	Y	Y	-	-	-	2	6	10	12	16	16	16	F2.5	
		4 in. / DN100 [fixed]	Y	Y	Y	Y	Y	Y	Y	-	-	-	2	6	10	12	16	16	16	F2.5	
S26RJ	Flanged flush diaphragm (JIS standards)	A 50	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	1	3	5	8	8	8	8	P2	
		A 80	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	3	5	10	10	10	10	10	P3
		A 100	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	3	5	10	10	10	10	10	P3
S26RR	Flanged flush diaphragm (Ring Joint ASME standard)	1.5 in.	-	-	Y	Y	Y	Y	Y	Y	Y	-	-	-	3	5	5	5	5	P1.5	
		2 in.	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	1	3	5	8	8	8	8	P2
		3 in.	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	3	5	10	10	10	10	10	P3
S26RH	Flanged to ISO 10423 flush diaphragm (API)	1 13/16 in.	-	-	-	-	-	-	-	Y	Y	-	-	-	-	-	-	-	-	H1.5	
		2 1/16 in.	-	-	-	-	-	-	-	-	Y	Y	-	-	-	-	-	-	-	-	P1.5
S26TT	Threaded off-line flanged	2 1/2 in.	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	-	2	4	8	8	10	10	10	T2.5
S26MA S26ME	Off-line flanged (ASME and EN standards)	2 1/2 in.	Y	Y	Y	Y	Y	Y	Y	Y	Y	-	-	2	4	8	8	10	10	10	T2.5
S26SS	Union nut, Triclamp, Sanitary, Aseptic	2 in. / F50	-	-	Y	Y	Y	Y	-	-	-	-	-	-	3	6	6	6	-	S2	
		3 in. / 4 in. / F80	Y	Y	Y	Y	Y	Y	-	-	-	-	3	4	8	8	8	8	-	S3	
	Cherry Burrell, Cherry Burrell Aseptic	2 in.	-	-	Y	Y	Y	Y	-	-	-	-	-	-	3	6	6	6	-	S2.5	
		3 in. / 4 in.	Y	Y	Y	Y	Y	Y	-	-	-	-	3	4	8	8	8	8	-	S3.5	
	Beverage	1 1/2 in.	Y	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	-	-	K1.5
S26VN	Saddle and Socket	2 1/2 in.	-	-	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	P1.5	
S26JN	In-line type (ONLY DIRECT MOUNT WITH 266HRH / 266NRH)	1 in.	-	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	J1	
		1 1/2 in.	-	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	J1.5	
		2 in.	-	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	J2	
		3 in.	-	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	J3	
S26KN	Pulp & Paper application specific (ONLY DIRECT MOUNT WITH 266HRH / 266NRH)	1 in. ball valve (266HRH only)	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	-	Y1	
		1 in. (gasketed, NPT, Gas)	-	-	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	-	M1	
		1 in. (NPT, Gas)	-	-	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	M1	
		1 1/2 in. (gasketed)	-	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	-	M1.5	
		1 1/2 in. (NPT - Gas)	-	Y	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	M1.5A	
		1 1/2 in. (M44 thread)	-	Y	Y	Y	Y	Y	Y	-	-	-	-	-	-	-	-	-	-	-	M1.5B

## Functional Specifications

### Range and span limits

Sensor Code	Upper Range Limit (URL)	Lower Range Limit (LRL)			266NRH absolute	Minimum span	
		266DRH differential	266DRH gauge	266HRH gauge			266HRH or 266NRH with S26KN
B	4 kPa	−4 kPa				0.2 kPa	
	40 mbar	−40 mbar				2 mbar	
	16 inH <sub>2</sub> O	−16 inH <sub>2</sub> O				0.8 inH <sub>2</sub> O	
E	16 kPa	−16 kPa	−16 kPa			0.8 kPa	
	160 mbar	−160 mbar	−160 mbar			8 mbar	
	64 inH <sub>2</sub> O	−64 inH <sub>2</sub> O	−64 inH <sub>2</sub> O			3.2 inH <sub>2</sub> O	
F	40 kPa	−40 kPa	−40 kPa	−40 kPa	0 abs	0.67 kPa	1.34 kPa
	400 mbar	−400 mbar	−400 mbar	−400 mbar		6.7 mbar	13.4 mbar
	160 inH <sub>2</sub> O	−160 inH <sub>2</sub> O	−160 inH <sub>2</sub> O	−160 inH <sub>2</sub> O		2.67 inH <sub>2</sub> O	5.34 inH <sub>2</sub> O
H	160 kPa	−160 kPa	−100 kPa (§)	−100 kPa (§)	0 abs	2.67 kPa	5.34 kPa
	1600 mbar	−1600 mbar	−1 bar (§)	−1 bar (§)		26.7 mbar	53.4 mbar
	642 inH <sub>2</sub> O	−642 inH <sub>2</sub> O	−14.5 psi (§)	−14.5 psi (§)		10.7 inH <sub>2</sub> O	21.4 inH <sub>2</sub> O
M	600 kPa	−600 kPa	−100 kPa (§)	−100 kPa (§)	0 abs	10kPa	20 kPa
	6 bar	−6 bar	−1 bar (§)	−1 bar (§)		0.1 bar	0.2 bar
	87 psi	−87 psi	−14.5 psi (§)	−14.5 psi (§)		1.45 psi	2.9 psi
P	2400 kPa	−2400 kPa	−100 kPa (§)	−100 kPa (§)	0 abs	40 kPa	80 kPa
	24 bar	−24 bar	−1 bar (§)	−1 bar (§)		0.4 bar	0.8 bar
	348 psi	−348 psi	−14.5 psi (§)	−14.5 psi (§)		5.8 psi	11.6 psi
Q	8000 kPa	−8000 kPa	−100 kPa (§)	−100 kPa (§)	0 abs	134 kPa	267 kPa
	80 bar	−80 bar	−1 bar (§)	−1 bar (§)		1.34 bar	2.67 bar
	1160 psi	−1160 psi	−14.5 psi (§)	−14.5 psi (§)		19.4 psi	38.7 psi
S	16000 kPa	−16000 kPa	−100 kPa (§)	−100 kPa (§)	0 abs	267 kPa	534 kPa
	160 bar	−160 bar	−1 bar (§)	−1 bar (§)		2.67 bar	5.34 bar
	2320 psi	−2320 psi	−14.5 psi (§)	−14.5 psi (§)		38.7 psi	77.4 psi
W	70000 kPa			−100 kPa (§)		1400 kPa	
	700 bar			−1 bar (§)		14 bar	
	10150 psi			−14.5 psi (§)		203 psi	
Z	105000 kPa			−100 kPa (§)		10500 kPa	
	1050 bar			−1 bar (§)		105 bar	
	15225 psi			−14.5 psi (§)		1522 psi	

(§) with atmospheric pressure reference of 100 kPa, 1 bar, 14.5 psi.

#### Span limits

Maximum span = URL (can be further adjusted up to ± URL (TD = 0.5) for differential models, within the range limits)  
IT IS RECOMMENDED TO SELECT THE TRANSMITTER SENSOR CODE PROVIDING THE TURNDOWN VALUE AS LOWEST AS POSSIBLE TO OPTIMIZE PERFORMANCE CHARACTERISTICS.

#### Zero suppression and elevation

Zero and span can be adjusted to any value within the range limits detailed in the table as long as:  
— calibrated span ≥ minimum span

#### Damping (feature not available for WirelessHART version)

Selectable time constant : between 0 and 60 s  
This is in addition to sensor response time.

#### Turn on time

Operation within specification in less than 10 s with minimum damping.

#### Insulation resistance

> 100 MΩ at 500 V DC (terminals to earth)

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## Operative limits

**REFER ALSO TO S26X DATA PAGES FOR POSSIBLE FURTHER LIMITATIONS DUE TO SEAL VARIANTS**

### Pressure limits:

#### Overpressure limits

Without damage to the transmitter

Model 266DRH	Fill fluid	Overpressure limits
Sensor F to S	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 21 MPa, 210 bar, 3045 psi <sup>(1)</sup>
Sensor F to Q 266DRH High Static	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 42 MPa, 420 bar, 6090 psi
Sensor E	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 16 MPa, 160 bar, 2320 psi
Sensor B (266DRH only)	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 7 MPa, 70 bar, 1015 psi
Sensor F to S	Inert (Galden)	0.135 kPa abs, 1.35 mbar abs, 1 mmHg and 21 MPa, 210 bar, 3045 psi <sup>(1)</sup>
Sensor E	Inert (Galden)	0.135 kPa abs, 1.35 mbar abs, 1 mmHg and 16 MPa, 160 bar, 2320 psi
Sensor F to S	Inert (Halocarbon)	0.4 kPa abs, 4 mbar abs, 3 mmHg and 21 MPa, 210 bar, 3045 psi <sup>(1)</sup>
Sensor F to Q 266DRH High Static	Inert (Halocarbon)	0.4 kPa abs, 4 mbar abs, 3 mmHg and 42 MPa, 420 bar, 6090 psi
Sensor E	Inert (Halocarbon)	0.4 kPa abs, 4 mbar abs, 3 mmHg and 16 MPa, 160 bar, 2320 psi

(1) 16 MPa, 160 bar, 2320 psi for AISI 316 ss NACE bolting

Models 266HRH and 266NRH	Fill fluid	Overpressure limits
Sensor P, Q, S	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 21 MPa, 210 bar, 3045 psi
Sensor F, H, M	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 14 MPa, 140 bar, 2030 psi
Sensor P, Q, S	Inert (Galden)	0.135 kPa abs, 1.35 mbar abs, 1 mmHg and 21 MPa, 210 bar, 3045 psi
Sensor F, H, M	Inert (Galden)	0.135 kPa abs, 1.35 mbar abs, 1 mmHg and 14 MPa, 140 bar, 2030 psi
Sensor P, Q, S	Inert (Halocarbon)	0.4 kPa abs, 4 mbar abs, 3 mmHg and 21 MPa, 210 bar, 3045 psi
Sensor F, H, M	Inert (Halocarbon)	0.4 kPa abs, 4 mbar abs, 3 mmHg and 14 MPa, 140 bar, 2030 psi
Sensor W (266HRH only)	Silicone oil	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 105 MPa, 1050 bar, 15225 psi
Sensor Z (266HRH only)	No filling	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 135 MPa, 1350 bar, 19570 psi

### Static pressure limits

Transmitters for differential pressure model 266DRH operates within specifications between the following limits:

Sensors	Static pressure limits
Sensor F to S with 2 seals	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 21 MPa, 210 bar, 3045 psi <sup>(1)</sup>
Sensor F to Q 266DRH high static with 2 seals	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 42 MPa, 420 bar, 6090 psi
Sensor F to S with 1 seal	1.3 kPa abs, 13 mbar abs, 0.2 psia and 21 MPa, 210 bar, 3045 psi <sup>(1)</sup>
Sensor E with 2 seals	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 16 MPa, 160 bar, 2320 psi
Sensor E with 1 seal	1.3 kPa abs, 13 mbar abs, 0.2 psia and 16 MPa, 160 bar, 2320 psi
Sensor B with 2 seals	0.07 kPa abs, 0.7 mbar abs, 0.5 mmHg and 7 MPa, 70 bar, 1015 psi
Sensor B with 1 seal	1.3 kPa abs, 13 mbar abs, 0.2 psia and 7 MPa, 70 bar, 1015 psi

(1) 16 MPa, 160 bar, 2320 psi for AISI 316 ss NACE bolting

### Proof pressure

The transmitter can be exposed without leaking to line pressure of up to

Model	Sensor	Proof pressure
266DRH	Sensor F to S	40.25 MPa, 402.5 bar, 5836 psi
	Sensor F to Q high static	77 MPa, 770 bar, 11165 psi
	Sensor E	31.5 MPa, 315 bar, 4567 psi
	Sensor B	14 MPa, 140 bar, 2030 psi
266HRH	Sensor F, H, M	28 MPa, 280 bar, 4060 psi
266NRH	Sensor P, Q, S	40.25 MPa, 402.5 bar, 5836 psi
266HRH	Sensor W	171.5 MPa, 1715 bar, 24868 psi
	Sensor Z	210.5 MPa, 2105 bar, 30522 psi

or two times the flange rating of seal, whichever is less.  
Meet ANSI/ISA-S 82.03 hydrostatic test requirements.

Overpressure and static upper limit can be derated by the flange rating of seal, as follows

Seal model S26RE to EN 1092-1	Carbon steel flange @ 120 °C	AISI 316 ss flange @ 20 °C
PN 16	16 bar	16 bar
PN 40	40 bar	40 bar
PN 63	63 bar	63 bar
PN 100	100 bar	100 bar

Seal model S26RA and S26RR to ASME B16.5	Carbon Steel @ 100 °F (38 °C)	AISI 316 ss flange @ 100 °F (38 °C)
Class 150	285 psi	275 psi
Class 300	740 psi	720 psi
Class 600	1480 psi	1440 psi
Class 900	2220 psi	2160 psi
Class 1500	3705 psi	3600 psi
Class 2500	6170 psi	6000 psi

Seal model S26RJ to JIS B 2220	Carbon steel flange @ 120 °C	AISI 316 ss flange @ 120 °C
10K	14 bar	14 bar
20K	36 bar	36 bar
40K	68 bar	68 bar

Seal model S26RH to ISO1 0423 (API 6A)	AISI 316 ss flange	
	-29 ... 38 °C (-20 ... 100 °F)	@ 93 °C (200 °C)
API 10000	69.5 MPa, 10000 psi	60 MPa, 8687 psi
API 15000	103.5 MPa, 15000 psi	89.2 MPa, 12937 psi

Seal model S26FE to EN 1092-1	AISI 316 L ss flange @ 20 °C
PN 16	16 bar
PN 40	40 bar
PN 63	63 bar
PN 100	100 bar

Seal model S26FA to ASME B16.5	AISI 316 L ss flange @ 100 °F (38 °C)
Class 150	230 psi
Class 300	600 psi
Class 600	1200 psi

Seal model S26ME to EN 1092-1	AISI 316 ss or Hastelloy C flange
PN 16 / 40	40 bar @ 25 °C (77 °F)

Seal model S26MA to ASME B16.5	AISI 316 L ss flange @ 25 °C (77 °F)	Hastelloy C flange @ 25 °C (77 °F)
Class 150	230 psi	290 psi
Class 300	600 psi	750 psi

The pressure limit decreases with increasing temperature above to the specified values as defined for the material, respectively for ASME B16.5, EN 1092-1, JIS or ISO 10423 standards.

Seal model S26TT bolting	Temperature range	Pressure limit
AISI 316 ss or Carbon steel	0 ... 100 °C (32 ... 212 °F)	21 MPa, 210 bar, 3045 psi
	-60 ... 0 °C (-76 ... 32 °F)	16 MPa, 160 bar, 2320 psi
	100 ... 360 °C (212 ... 680 °F)	16 MPa, 160 bar, 2320 psi
Alloy steel	0 ... 37.8 °C (32 ... 100 °F)	21 MPa, 210 bar, 3045 psi
	-48.3 ... 0 °C (-55 ... 32 °F)	16 MPa, 160 bar, 2320 psi
	37.8 ... 360 °C (100 ... 680 °F)	13 MPa, 130 bar, 1885 psi

Seal model S26SS	Pressure limit
Triclamp 2 in.	3.8 MPa, 38 bar, 550 psi
Triclamp 3 in.	2.4 MPa, 24 bar, 350 psi
Triclamp 4 in.	1.7 MPa, 17 bar, 250 psi
Union nut F50	2.5 MPa, 25 bar, 360 psi
Union nut F80	2.5 MPa, 25 bar, 360 psi
Cherry Burrel 2 in.	1.9 MPa, 19 bar, 275 psi
Cherry Burrel 3 in.	1.9 MPa, 19 bar, 275 psi
Cherry Burrel 4 in.	1.9 MPa, 19 bar, 275 psi
Sanitary flush 4 in.	1.9 MPa, 19 bar, 275 psi
Sanitary extended 4 in.	1.9 MPa, 19 bar, 275 psi
Beverage bolted type 1 1/2 in.	4 MPa, 40 bar, 580 psi
V-band clamp option	1 MPa, 10 bar, 145 psi
4in schedule 5 V-band clamp option	0.7 MPa, 7 bar, 100 psi

#### Seal model S26WA to ASME B16.5

up to 41.37 MPa, 413.7 bar, 6000 psi

but not greater than rating of mounting flange (NOT SUPPLIED)

Seal model S26WE to EN 1092-1	
Form B1	40 MPa, 400 bar, 5800 psi
Form D	16 MPa, 160 bar 2320 psi
Form E	10 MPa, 100 bar, 1450 psi

but not greater than rating of mounting flange (NOT SUPPLIED)

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### Seal model S26CN

2 MPa, 20 bar, 290 psi

Seal model S26BN	Temp limits of 20 and 120 °C (68 and 248 °F)
Types 89, 90 and 92	42 MPa, 420 bar, 6090 psi
Types 91	35 MPa, 350 bar, 5075 psi

Seal model S26VN bolting	Temperature range	Pressure limit
Alloy steel	0 ... 37.8 °C (32 ... 100 °F)	16 MPa, 160 bar, 2320 psi
	-48.3 ... 0 °C (-55 ... 32 °F)	10 MPa, 100 bar, 1450 psi
	37.8 ... 360 °C (100 ... 680 °F)	10 MPa, 100 bar, 1450 psi

### Seal model S26UN

Union Connection	10.3 MPa, 103 bar, 1500 psi
With Chemical Tee Flange	2 MPa, 20 bar, 300 psi

### Seal model S26PN

3 in. ASME 600 integral flange	8 MPa, 80 bar, 1160 psi
2 in. ASME 2500 threaded flange	32 MPa, 320 bar, 4640 psi

### Seal model S26JN

up to 16 MPa, 160 bar, 2320 psi  
but not greater than rating of mounting flange (NOT SUPPLIED)

### Seal model S26KN

1 in seal - sealing with gaskets	3 MPa, 30 bar, 435 psi
1 1/2 in seals - sealing with gasket	5 MPa, 50 bar, 725 psi
1 in seal with ball valve connection	4 MPa, 40 bar, 580 psi
1 in NPT, 1 1/2 in NPT	34.5 MPa, 345 bar, 5000 psi
G 1 in A, G 1 1/2 in A	60 MPa, 600 bar, 8700 psi

Flushing ring gasket material	Process limits		
	Pressure (max.)	Temperature	P x T
Garlock	6.9 MPa, 69 bar, 1000 psi	-73 and 204 °C (-100 and 400 °F)	250000 (°F x psi)
Graphite	2.5 MPa, 25 bar, 362 psi	-100 and 380 °C (-148 and 716 °F)	
PTFE	6 MPa, 60 bar, 870 psi	-100 and 250 °C (-148 and 482 °F)	

### Vacuum service for seals

Full vacuum subject to fill fluid limits.

Refer to FILL FLUID CHARACTERISTICS table.

Minimum pressure with seal tantalum diaphragm is 1 kPa abs, 10 mbar abs, 0.15 psia.

### Temperature limits °C (°F):

#### Ambient

is the operating temperature

Model 266DRH	Ambient temperature limits
Silicone oil for sensor F to S	-40 and 85 °C (-40 and 185 °F)
Silicone oil for sensor B and E	-25 and 85 °C (-13 and 185 °F)
Inert (Galden) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Inert (Galden) for sensor E	-10 and 85 °C (14 and 185 °F)
Inert (Halocarbon) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Inert (Halocarbon) for sensor E	-10 and 85 °C (14 and 185 °F)

#### Models 266HRH - 266NRH

Models 266HRH - 266NRH	Ambient temperature limits
Silicone oil for sensor F to W	-40 and 85 °C (-40 and 185 °F)
Inert (Galden) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Inert (Halocarbon) for sensor F to S	-20 and 85 °C (-4 and 185 °F)
Sensor Z without filling	-40 and 85 °C (-40 and 185 °F)

#### Models 266XRH

Models 266XRH	Ambient temperature limits
LCD integral display	-40 and 85 °C (-40 and 185 °F)

LCD display may not be clearly readable below -20 °C (-4 °F) or above +70 °C (+158 °F)

#### Models 266XRH

Models 266XRH	Ambient temperature limit
Painted AISI 316 L ss housing	max 70 °C (158 °F) continuous

### IMPORTANT

For Hazardous Atmosphere applications see the temperature range specified on the certificate/approval relevant to the aimed type of protection

### Process - transmitter

Model 266DRH (side without seal)	Process temperature limits
Silicone oil for sensor F to S	-40 and 121 °C (-40 and 250 °F) <sup>(1)</sup>
Silicone oil for sensor B and E	-25 and 121 °C (-13 and 250 °F) <sup>(1)</sup>
Inert (Galden) for sensor F to S	-20 and 100 °C (-4 and 212 °F) <sup>(2)</sup>
Inert (Galden) for sensor E	-10 and 100 °C (14 and 212 °F) <sup>(2)</sup>
Inert (Halocarbon) for sensor F to S	-20 and 100 °C (-4 and 212 °F) <sup>(2)</sup>
Inert (Halocarbon) for sensor E	-10 and 100 °C (14 and 212 °F) <sup>(2)</sup>
Viton gasket	-20 and 121 °C (-4 and 250 °F)

(1) 100 °C (212 °F) for application below atmospheric pressure

(2) 65 °C (150 °F) for application below atmospheric pressure

## Process - seal

Refer to the following FILL FLUID CHARACTERISTICS table detailing characteristics of fill fluids when used in transmitters with seal(s) and further limitation for specific models and/or variants.

Fill fluid (application)	Process temperature and pressure limits				Specifications @ 25 °C (77°F)		
	Tmax °C (°F) @ Pabs > of	Pmin mbar abs (mmHg)	Tmax °C (°F) @ Pmin	Tmin °C (°F)	Specific gravity (kg/dm3)	Kinematic viscosity (cst)	Thermal expansion (x 10-3 /°C)
Silicone oil PMX 200 10 cSt	250 (480) @ 385 mbar	0.7 (0.5)	130 (266)	-40 (-40)	0.934	10	1.08
Silicone oil Baysilone PD5 5 cSt	250 (480) @ 900 mbar	0.7 (0.5)	45 (113)	-85 (-121)	0.923	5	0.98
Inert oil Galden G5 (oxygen service)	160 (320) @ 1 bar	2.1 (1.52)	60 (140)	-20 (-4)	1.82	4.4	1.1
Inert oil Halocarbon 4.2 (oxygen service)	180 (356) @ 425 mbar	4 (3)	70 (158)	-20 (-4)	1.87	6.3	0.864
Silicone polymer Syltherm XLT (cryogenic service)	100 (212) @ 118 mbar	2.1 (1.52)	20 (68)	-100 (-148)	0.852	1.4	1
Silicone oil for high temperature (for REMOTE SEAL)	375 (707) @ 1 bar	0.7 (0.5)	220 (428)	-10 (14)	1.07	39	0.77
Silicone oil for high temperature (for DIRECT MOUNT SEAL)	250 (480) @ 3.5 mbar	0.7 (0.5)	220 (428)	-10 (14)	1.07	39	0.77
Vegetable oil Neobee M-20 (food - sanitary) FDA approved	200 (390) @ 1 bar	10 (7.2)	20 (68)	-18 (0)	0.92	9.8	1.2
Mineral oil Esso Marcol 152 (food - sanitary) FDA approved	250 (480) @ 630 mbar	0.7 (0.5)	110 (230)	-6 (21)	0.86	30	0.80
Glycerin Water 70% (food - sanitary) FDA approved	93 (200) @ 1 bar	1000 (760)	93 (200)	-7 (20)	1.08	2	0.36

Absolute viscosity (cP) = Kinematic Viscosity (cSt) x Specific gravity at specified temperature.

The absolute viscosity value is used for response time calculation.

Material	Process temperature limits
Tantalum diaphragm	260 °C (500 °F) max.
PFA anti-stick coating	204 °C (400 °F) max.
PFA anti-corrosion/anti-stick coating	250 °C (482 °F) max.
AISI gold plated diaphragm	320 °C (608 °F) max.
PTFE gasket	-100 and 260 °C (-148 and 500 °F)
Viton gasket	-20 and 260 °C (-4 and 500 °F)
graphite gasket (except S26CN)	-100 and 360 °C (-148 and 680 °F)
graphite gasket for S26CN	-100 and 340 °C (-148 and 644 °F)
Silicone rubber gasket	-50 and 204 °C (-58 and 400 °F)
Ethylene Propylene gasket	-40 and 149 °C (-40 and 300 °F)
Ethylene Propylene gasket	-40 and 121 °C (-40 and 250 °F)
EPDM 3-A 18-03 Class II	

Seals model (mnemonic)	Process temperature limits
S26JN In-line type (J1, J1.5, J2, J3)	-40 and 180 °C (-40 and 356 °F)
S26KN Pulp & Paper (M1, M1.5 all)	-40 and 150 °C (-40 and 302 °F)
S26KN Pulp & Paper (Y1)	-20 and 130 °C (-4 and 266 °F)
S26SS Beverage (K1.5)	-40 and 150 °C (-40 and 302 °F)
S26SS with Ethylene Propylene gasket EPDM 3-A 18-03 Class II	-40 and 121 °C (-40 and 250 °F)
S26SS with Ethylene Propylene gasket	-40 and 149 °C (-40 and 300 °F)
S26XX with PFA anti-stick coating	max. 204 °C (max 400 °F)

## Storage

Models 266XRH	Storage temperature limits
Storage limits	-50 and 85 °C (-58 and 185 °F)
LCD integral display	-40 and 85 °C (-40 and 185 °F)

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## Environmental limits

### Electromagnetic compatibility (EMC)

Comply with 2014/30/UE to standards EN 61326-1:2013.  
For IEC 61508 SIL certified transmitter to EN 61326-3-1:2008.  
For transmitter with option "YE" to NAMUR NE 021 (2004).  
Surge immunity level (with surge protector): 4 kV  
(according to IEC 61000-4-5 EN 61000-4-5)

### Pressure equipment directive (PED)

Comply with 2014/68/UE to standards ANSI/ISA 61010-1:2012  
following Sound Engineering Practice (SEP).

### Humidity

Relative humidity: up to 100 %  
Condensing, icing: admissible

### Vibration resistance

Accelerations up to 2 g at frequency up to 1000 Hz  
(according to IEC 60068-2-6)

### Shock resistance

Acceleration: 50 g  
Duration: 11 ms  
(according to IEC 60068-2-27)

### Wet and dust-laden atmospheres

The transmitter is dust and sand tight and protected against immersion effects as defined by IEC 60529 (2001) to IP 67 (IP 68 on request) or by NEMA Type 4X.  
IP65 with Harting Han connector.  
Aluminium and AISI housings as barrel version also comply to IP 66 as defined by IEC 60529 (2001).

## Hazardous atmospheres

### (FOR ALL VERSIONS EXCEPT WirelessHART)

With or without integral display

---

INTRINSIC SAFETY Ex ia:

ATEX Europe (code E1) approval

II 1 G Ex ia IIC T6...T4 Ga and II 1/2 G Ex ia IIC T6...T4 Ga/Gb and

II 1 D Ex ia IIIC T85 °C Da and II 1/2 D Ex ia IIIC T85 °C Da; IP67.

IECEx (code E8) approval

Ex ia IIC T6...T4 Ga and Ex ia IIIC T85 °C Da; IP67.

NEPSI China (code EY)

Ex ia IIC T4/T5/T6 Ga, Ex ia IIC T4/T5/T6 Ga/Gb,

Ex iaD 20 T85/T100/T135, Ex iaD 20/21 T85/T100/T135.

---

EXPLOSION PROOF:

ATEX Europe (code E2) approval

II 1/2 G Ex db IIC T6 Ga/Gb Ta=-50 °C to +75 °C and

II 1/2 D Ex tb IIIC T85 °C Db Ta = -50 °C to +75 °C; IP67.

IECEx (code E9) approval

Ex db IIC T6 Ga/Gb Ta=-50 °C to +75 °C and

Ex tb IIIC T85 °C Db Ta = -50 °C to +75 °C; IP67.

NEPSI China (code EZ)

Ex d IIC T6 Gb, Ex tD A21IP67 T85 °C.

---

INTRINSIC SAFETY Ex ic:

ATEX Europe (code E3 ) type examination

II 3 G Ex ic IIC T6...T4 Gc and II 3 D Ex tc IIIC T85 °C Dc; IP67.

IECEx (code ER) type examination

Ex ic IIC T6...T4 Gc and Ex tc IIIC T85 °C Dc; IP67.

NEPSI China (code ES) type examination

Ex ic IIC T4...T6 Gc, Ex nA IIC T4...T6 Gc, Ex tD A22IP67 T85 °C.

---

COMBINED ATEX (code E7 = E1 + E2), (code EW = E1 + E2 + E3)

COMBINED IECEx (code EH = E8 + E9), (code EI = E8 + E9 + ER)

COMBINED NEPSI (code EP = EY + EZ), (code EQ = EY + EZ + ES)

---



## Hazardous atmospheres

### (FOR ALL VERSIONS EXCEPT WirelessHART)

With or without integral display

FM Approvals US (code E6) and FM Approvals Canada (code E4):

- Explosionproof (US): Class I, Division 1, Groups A, B, C, D; T5
- Explosionproof (Canada): Class I, Division 1, Groups B, C, D; T5
- Dust-ignitionproof: Class II, Division 1, Groups E, F, G; Class III, Div. 1; T5
- Flameproof (US): Class I, Zone 1 AEx d IIC T4 Gb
- Flameproof (Canada): Class I, Zone 1 Ex d IIC T4 Gb
- Nonincendive: Class I, Division 2, Groups A, B, C, D T6...T4
- Energy limited (US): Class I, Zone 2 AEx nC IIC T6...T4
- Energy limited (Canada): Class I, Zone 2 Ex nC IIC T6...T4
- Intrinsically safe: Class I, II, III, Division 1, Groups A, B, C, D, E, F, G T6...T5

Class I, Zone 0 AEx ia IIC T6...T4 (US)

Class I, Zone 0 Ex ia IIC T6...T4 (Canada)

Type 4X, IP67 for all above markings.

COMBINED FM Approvals US and Canada

- Intrinsically safe (code EA)
- Explosionproof, Flameproof and Dust-ignitionproof (code EB)
- Nonincendive and Energy Limited (code EC)

COMBINED ATEX, FM and IECEx Approvals (code EN = EW + E4 + E6+ E)

Technical Regulations Customs Union EAC (Russia, Kazakhstan, Belarus),  
Inmetro (Brazil), Kosha (Korea)

## Hazardous atmospheres

### (ONLY FOR WirelessHART VERSION)

With or without integral display

INTRINSIC SAFETY:

ATEX Europe (code E1) approval

II 1 G Ex ia IIC T4 and II 1/2 G Ex ia IIC T4.

IECEx (code E8) approval

Ex ia IIC T4.

FM Approvals US and FM Approvals Canada:

- Intrinsically safe: Class I, Div. 1, Groups A, B, C, D; T4 (code EA)  
Class I, Zone 0 AEx ia IIC T4, Gb (FM US)  
Class I, Zone 0 Ex ia IIC T4, Gb (FM Canada)

COMBINED ATEX, IECEx and FM Approvals US and Canada

(Code EF = E1 + E8 + EA)

## IMPORTANT

REFER TO CERTIFICATES FOR AMBIENT TEMPERATURE  
RANGES RELATED TO THE DIFFERENT TEMPERATURE  
CLASSES.

## Electrical Characteristics and Options

### Optional indicators

#### Integrated digital display

(code LS; only with HART standard functionality)

Wide screen LCD, 128 x 64 pixel,  
52.5 x 27.2 mm (2.06 x 1.07 in.) dot matrix.  
Two keys for zero/span or without keypad.  
User selectable application-specific  
visualizations.

Display may also indicate static pressure,  
sensor temperature and diagnostic messages.



#### Integral display with integral keypad

(code L1; not with HART standard functionality)

Wide screen LCD, 128 x 64 pixel,  
52.5 x 27.2 mm (2.06 x 1.07 in.) dot matrix.  
Multilanguage. Four keys for configuration  
and management of device.  
Easy setup for quick commissioning.  
User selectable application-specific  
visualizations.

Totalized and instantaneous flow indication.

Display may also indicate static pressure, sensor temperature  
and diagnostic messages and provides configuration facilities.



#### Integral display with Through-The-Glass (TTG) activated keypad (code L5; not with HART standard functionality)

As above integral display but equipped  
with the innovative TTG keypad allowing  
the activation of the configuration and  
management menus of the device without  
the need of removing the transmitter  
housing cover. TTG keypad is protected  
against accidental activations.



### Optional surge protection

Up to 4kV

- voltage 1.2  $\mu$ s rise time / 50  $\mu$ s delay time to half value
- current 8  $\mu$ s rise time / 20  $\mu$ s delay time to half value

### Process diagnostics (PILD)

Plugged impulse line detection (PILD) generates a warning via  
communication (HART, PA, FF). The device can be configured  
to drive the output to "Alarm current" or set a status "BAD".

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### HART® digital communication and 4 to 20 mA output Standard and Advanced functionality

Device type: 1a07<sub>hex</sub> (listed with HCF)

#### Power supply

The transmitter operates from 10.5 to 42 V DC with no load and is protected against reverse polarity connection (additional load allows operations over 42 V DC). For Ex ia and other intrinsically safe approval power supply must not exceed 30 V DC. Minimum operating voltage increases to 12.3 V DC with optional surge protector or to 10.8 V DC with optional conformity to NAMUR NE 21 (2004).

#### Ripple

20 mV max on a 250 Ω load as per HART specifications.

#### Load limitations

4 to 20 mA and HART total loop resistance :

$$R \text{ (k}\Omega\text{)} = \frac{\text{Supply voltage} - \text{min. operating voltage (V DC)}}{22 \text{ mA}}$$

A minimum of 250 Ω is required for HART communication.

#### Output signal

Two-wire 4 to 20 mA, user-selectable for linear or square root output, power of  $\frac{3}{2}$  or  $\frac{5}{2}$ , square root for bidirectional flow, 22 points linearization table (i.e. for horizontal or spherical tank level measurement).

HART® communication provides digital process variable superimposed on 4 to 20 mA signal, with protocol based on Bell 202 FSK standard.

HART revision 5 is the default HART output.

HART revision 7 is available on request.

#### Output current limits (to NAMUR NE 43 standard)

Overload condition

- Lower limit: 3.8 mA (configurable from 3.8 to 4 mA)
- Upper limit: 20.5 mA (configurable from 20 to 21 mA)

Alarm current

- Lower limit: 3.6 mA (configurable from 3.6 to 4 mA)
- Upper limit: 21 mA (configurable from 20 to 23 mA, limited to 22 mA for HART Safety; apply for electronics release 7.1.15 or later)

Factory setting: high alarm current

### IEC 62591 WirelessHART® output

Device type: 1a06<sub>hex</sub> (listed with HCF)

Network ID: ABB<sub>hex</sub> (2747 decimal)

Join keys: 57495245<sub>hex</sub> (1464422981) 4c455353<sub>hex</sub> (1279611731)  
4649454c<sub>hex</sub> (1179206988) 444b4559<sub>hex</sub> (1145783641).

#### Power Supply

1x D-cell size lithium-thionyl chloride battery.

Battery life: 10 years at 32 sec. update time, 8 years at 16 sec. update time or 5 years at 8 sec. update time.

(at reference conditions of 25 ± 2 °C ambient temperature, data routed from 3 additional devices, LCD off).

THE BATTERY CAN BE REPLACED IN FIELD, ALSO IN HAZARDOUS CLASSIFIED AREA.

#### Output signal

IEC 62591 WirelessHART Version 7.5 (IEEE 802.15.4-2006);

Frequency band: 2.4 GHz DSSS

Update rate: user selectable from 1 sec. to 60 min.

#### Integrated adjustable omnidirectional antenna

— Output radio frequency: maximum 10 mW (10 dBm) EIRP

— Range: up to 300 m. (328 yds.)

Minimum distance between antenna and person is 0.2 m. (8 in.)

#### Telecommunications directive

Every wireless measuring device must be certified in accordance with the telecommunications directive, in this case the frequency range. This certification is country-specific.

#### European directives

Radio Equipment & Telecommunications Terminal Equipment Directive 2014/53/UE to standards EN 60950-1:2013, EN 62311:2008, EN 301 489-1 V1.9.2, EN 301 489-17 V2.2.1, EN 300 328 v1.8.1.

In Europe, use of the 2400 - 2483.5 MHz frequency band is not harmonized. Country-specific regulations must be observed.

#### Restrictions for Norway

Operation not permitted within a radius of 20 km around Ny-Alesund in Svalbard. For more information, see [www.npt.no](http://www.npt.no) Norway Posts and Telecommunications site

#### Extra-european radio frequency licences

USA to FCC Part 15.247:2009;

Canada to IC RSS-210 and ICES-003;

Mexico; India; United Arab Emirates (UAE)

## **FOUNDATION Fieldbus™ output**

### **Device type**

LINK MASTER DEVICE

Link Active Scheduler (LAS) capability implemented.

Manufacturer code: 000320<sub>hex</sub>

Device type code: 0007<sub>hex</sub>

### **Power supply**

The transmitter operates from 9 to 32 V DC, polarity independent, with or without surge protector.

For Ex ia approval power supply must not exceed 24 V DC (FF-816 certification) or 17.5 V DC (FISCO certification).

### **Current consumption**

operating (quiescent): 15 mA

fault current limiting: 20 mA max.

### **Output signal**

Physical layer in compliance to IEC 61158-2/EN 61158-2.

Transmission to Manchester II modulation, at 31.25 kbit/s.

### **Function blocks/execution period**

3 enhanced Analog Input blocks/25 ms max (each)

1 enhanced PID block/40 ms max.

1 standard ARithmetic block/25 ms

1 standard Input Selector block/25 ms

1 standard Control Selector block/25 ms

1 standard Signal Characterization block/25 ms

1 standard Integrator/Totalizer block/25 ms

### **Additional blocks**

1 enhanced Resource block,

1 custom Pressure with calibration transducer block

1 custom Advanced Diagnostics transducer block including  
Plugged Input Line Detection

1 custom Local Display transducer block

### **Number of link objects**

35

### **Number of VCRs**

35

## **Output interface**

FOUNDATION fieldbus digital communication protocol to standard H1, compliant to specification V. 1.7.

### **Transmitter failure mode**

The output signal is “frozen” to the last valid value on gross transmitter failure condition, detected by self-diagnostics which also indicate a BAD conditions. If electronic failure or short circuit occur the transmitter consumption is electronically limited at a defined value (20 mA approx), for safety of the network.

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## PROFIBUS® PA output

### Device type

Pressure transmitter compliant to Profiles 3.0.1  
Identification number: 3450<sub>hex</sub>

### Power supply

The transmitter operates from 9 to 32 V DC , polarity independent, with or without surge protector.  
For Ex ia approval power supply must not exceed 17.5 V DC.  
Intrinsic safety installation according to FISCO model.

### Current consumption

operating (quiescent): 15 mA  
fault current limiting: 20 mA max.

### Output signal

Physical layer in compliance to IEC 1158–2/EN 61158–2 with transmission to Manchester II modulation, at 31.25 kbit/s.

### Output interface

PROFIBUS PA communication according to Profibus DP50170 Part 2/DIN 19245 part 1–3.

### Output update time

25 ms

### Data blocks

3 analog input, 1 physical.

### Additional blocks

- 1 Pressure with calibration transducer block
- 1 Advanced Diagnostics transducer block including Plugged Input Line Detection
- 1 Local Display transducer block

### Transmitter failure mode

On gross transmitter failure condition, detected by self-diagnostics, the output signal can be driven to defined conditions, selectable by the user as safe, last valid or calculated value.

If electronic failure or short circuit occur the transmitter consumption is electronically limited at a defined value (20 mA approx), for safety of the network.

## Performance specifications

Stated at reference condition to IEC 60770 ambient temperature of 20 °C (68 °F), relative humidity of 65 %, atmospheric pressure of 1013 hPa (1013 mbar), mounting position with vertical diaphragm and zero based range for transmitter with isolating diaphragms in AISI 316 L ss or Hastelloy and silicone oil fill and HART digital trim values equal to 4 mA and to 20 mA span end points, in linear mode. Unless otherwise specified, errors are quoted as % of span. Some performance referring to the Upper Range Limit are affected by the actual turndown (TD) as ratio between Upper Range Limit (URL) and calibrated span. IT IS RECOMMENDED TO SELECT THE TRANSMITTER SENSOR CODE PROVIDING THE TURNDOWN VALUE AS LOWEST AS POSSIBLE TO OPTIMIZE PERFORMANCE CHARACTERISTICS.

### Accuracy rating

% of calibrated span, including combined effects of terminal based linearity, hysteresis and repeatability.  
For fieldbus versions SPAN refer to analog input function block outscale range

Model	Sensor	for TD	
266DRH	F	from 1:1 to 10:1	± 0.06 %
with seal(s)	F	from 10:1 to 60:1	± (0.006 x TD) %
mnemonic	H to S	from 1:1 to 10:1	± 0.075 %
P3, F3, E3,	H to S	from 10:1 to 60:1	± (0.0075 x TD) %
S3, F2	E and B	from 1:1 to 5:1	± 0.10 %
	E and B	from 5:1 to 20:1	± (0.02 x TD) %
266DRH high static	F to Q	from 1:1 to 10:1	± 0.075 %
with seal(s) mnemonic	F to Q	from 10:1 to 60:1	± (0.0075 x TD) %
P3, F3, E3, S3, F2			
266DRH	F to S	from 1:1 to 10:1	± 0.10 %
with seal(s) mnemonic	F to S	from 10:1 to 60:1	± (0.01 x TD) %
different from above	E and B	from 1:1 to 5:1	± 0.15 %
	E and B	from 5:1 to 20:1	± (0.03 x TD) %
266DRH high static	F to Q	from 1:1 to 10:1	± 0.10 %
with seal(s) mnemonic	F to Q	from 10:1 to 60:1	± (0.01 x TD) %
different from above			

Model	Sensor	for TD	
266HRH with seal mnemonic P3, F3, E3, S3, F2, K1.5	M and P	from 1:1 to 10:1	$\pm 0.06 \%$
	M and P	from 10:1 to 60:1	$\pm (0.006 \times \text{TD}) \%$
	F, H, Q,	from 1:1 to 10:1	$\pm 0.075 \%$
	S	from 10:1 to 60:1	$\pm (0.0075 \times \text{TD}) \%$
	W	from 1:1 to 5:1	$\pm 0.075 \%$
		from 5:1 to 50:1	$\pm (0.015 \times \text{TD}) \%$
266HRH with seal mnemonic Y1	Z	from 1:1 to 5:1	$\pm 0.15 \%$
		from 5:1 to 10:1	$\pm (0.03 \times \text{TD}) \%$
	H and M	from 1:1 to 5:1	$\pm 0.15 \%$
	H and M	from 5:1 to 30:1	$\pm (0.03 \times \text{TD}) \%$
266HRH with seal mnemonic M1	P, Q	from 1:1 to 5:1	$\pm 0.075 \%$
	P, Q	from 5:1 to 30:1	$\pm (0.015 \times \text{TD}) \%$
	H and M	from 1:1 to 5:1	$\pm 0.15 \%$
	H and M	from 5:1 to 30:1	$\pm (0.03 \times \text{TD}) \%$
266HRH with seal mnemonic M1.5, M1.5B	P, Q, S	from 1:1 to 5:1	$\pm 0.075 \%$
	P, Q, S	from 5:1 to 30:1	$\pm (0.015 \times \text{TD}) \%$
266HRH with seal mnemonic M1.5A	F, H, M,	from 1:1 to 5:1	$\pm 0.075 \%$
	P, Q, S	from 5:1 to 30:1	$\pm (0.015 \times \text{TD}) \%$
266HRH with seal different from above	F, H, M,	from 1:1 to 10:1	$\pm 0.10 \%$
	P, Q, S	from 10:1 to 60:1	$\pm (0.01 \times \text{TD}) \%$
	W	from 1:1 to 5:1	$\pm 0.10 \%$
		from 5:1 to 50:1	$\pm (0.02 \times \text{TD}) \%$
	Z	from 1:1 to 5:1	$\pm 0.20 \%$
		from 5:1 to 10:1	$\pm (0.04 \times \text{TD}) \%$
266NRH with seal mnmo- nic P3, F3, E3, S3, F2, K1.5	F to S	from 1:1 to 10:1	$\pm 0.10 \%$
	F to S	from 10:1 to 60:1	$\pm (0.01 \times \text{TD}) \%$
266NRH with seal mnemonic M1	H and M	from 1:1 to 5:1	$\pm 0.20 \%$
	H and M	from 5:1 to 30:1	$\pm (0.04 \times \text{TD}) \%$
	P, Q, S	from 1:1 to 5:1	$\pm 0.10 \%$
	P, Q, S	from 5:1 to 30:1	$\pm (0.02 \times \text{TD}) \%$
266NRH with seal mnemonic M1.5, M1.5B	F, H, M,	from 1:1 to 5:1	$\pm 0.10 \%$
	P, Q	from 5:1 to 30:1	$\pm (0.02 \times \text{TD}) \%$
266NRH with seal mnemonic M1.5A	F, H, M,	from 1:1 to 5:1	$\pm 0.10 \%$
	P, Q, S	from 5:1 to 30:1	$\pm (0.02 \times \text{TD}) \%$
266NRH with seal different from above	F to S	from 1:1 to 10:1	$\pm 0.15 \%$
	F to S	from 10:1 to 60:1	$\pm (0.015 \times \text{TD}) \%$

### Ambient temperature

Transmitter effect per 20K change between the limits of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  (per  $36^{\circ}\text{F}$  change between the limits of  $-40$  to  $+185^{\circ}\text{F}$ ):

Model	Sensor	for TD up to	
266DRH	E to S	10 : 1	$\pm (0.04 \%$ URL + $0.065 \%$ span)
	B	10 : 1	$\pm (0.06 \%$ URL + $0.10 \%$ span)
266HRH	F to W	10 : 1	$\pm (0.04 \%$ URL + $0.065 \%$ span)
	Z	10 : 1	$\pm (0.06 \%$ URL + $0.10 \%$ span)
266NRH	F to S	10 : 1	$\pm (0.08 \%$ URL + $0.13 \%$ span)

REFER TO S26 SEALS ERRORS IN NEXT PAGES FOR TEMPERATURE ADDITIONAL EFFECTS OF REMOTE/DIRECT MOUNT SEAL(S)

### Static pressure (for 266DRH)

(zero errors can be calibrated out at line pressure)

per 2 MPa, 20 bar or 290 psi for all sensors except B with remote seal(s)

— zero error:  $\pm 0.25\%$  of URL

— span error:  $\pm 0.25\%$  of reading

with direct mount seal only

— zero error:  $\pm 0.15\%$  of URL

— span error:  $\pm 0.15\%$  of reading

with direct mount plus remote seal

— zero error:  $\pm 0.20\%$  of URL

— span error:  $\pm 0.20\%$  of reading

per 2 MPa, 20 bar or 290 psi for sensor B only

with remote seal(s) or with direct mount plus remote seal

— zero error:  $\pm 0.30\%$  of URL

— span error:  $\pm 0.30\%$  of reading

Model 266DRH with direct mount seal only

— zero error:  $\pm 0.25\%$  of URL

— span error:  $\pm 0.25\%$  of reading

### Supply voltage

Within voltage/load specified limits the total effect is less than  $0.005 \%$  of URL per volt.

### Load

Within load/voltage specified limits the total effect is negligible.

### Electromagnetic field

Meets all the requirements of EN 61326 for surge immunity level (of NAMUR NE 21 on request).

### Common mode interference

No effect from 100Vrms @ 50Hz, or 50 V DC

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### Seals temperature effects

The following table shows temperature effect per 20 K (36 °F) change, detailed separately for

- the seal (one element), as process temperature error
- the capillary per meter
- the system (transmitter sensor when combined with a seal of specific size/type, either direct mount or remote)  
referred to silicone oil (PMX 200) filling and AISI 316 L ss diaphragm materials.

For filling different from silicone oil (PMX 200) the errors can be multiplied by ratio between the thermal expansion coefficients of the selected filling divided by the one of PMX 200, listed in the fill fluid characteristics table.

THE ERRORS IN TABLE CAN BE CONSIDERED DIVIDED BY 4 FOR TRANSMITTERS USING SAME REMOTE SEAL ON THE TWO SIDES.

S26RA, S26RE, S26RJ rotating flange seal size - Mnemonic	Sensor URL	Seal error (process)	Direct mount system error (ambient)	Remote system error (ambient)	1 metre capillary error (ambient)
2 in. / DN 50 / A50 - P2	40 kPa, 160 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.11 kPa, 0.44 inH2O
2 in. / DN 50 / A50 - P2	≥ 160 kPa, 642 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.07 kPa, 0.28 inH2O
2 in. / DN 50 - F2	≥ 4 kPa, 16 inH2O	0.05 kPa, 0.2 inH2O	0.04 kPa, 0.16 inH2O	0.04 kPa, 0.16 inH2O	0.03 kPa, 0.12 inH2O
2 in. / DN 50 - E2	40 kPa, 160 inH2O	0.25 kPa, 1 inH2O	0.21 kPa, 0.84 inH2O	0.20 kPa, 0.80 inH2O	0.15 kPa, 0.60 inH2O
2 in. / DN 50 - E2	≥ 160 kPa, 642 inH2O	0.25 kPa, 1 inH2O	0.21 kPa, 0.84 inH2O	0.20 kPa, 0.80 inH2O	0.10 kPa, 0.40 inH2O
3 / 4 in. / DN 80 / 100 A80 / 100 - P3	4 - 16 kPa, 16 - 64 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O
3 / 4 in. / DN 80 / 100 A80 / 100 - P3	≥ 40 kPa, 160 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O
3 / 4 in. / DN 80 / 100 - F3	≥ 4 kPa, 16 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.01 kPa, 0.04 inH2O
3 in. / DN 80 - E3	≥ 4 kPa, 16 inH2O	0.14 kPa, 0.56 inH2O	0.05 kPa, 0.20 inH2O	0.05 kPa, 0.20 inH2O	0.04 kPa, 0.16 inH2O

S26RR flanged RJ seal size - Mnemonic	Sensor URL	Seal error (process)	Direct mount system error (ambient)	Remote mount error (ambient)	1 metre capillary error (ambient)
1 1/2 in. - P1.5	≥ 160 kPa, 642 inH2O	0.74 kPa, 3 inH2O	0.67 kPa, 2.68 inH2O	0.62 kPa, 2.48 inH2O	0.31 kPa, 1.24 inH2O
2 in. - P2	40 kPa, 160 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.11 kPa, 0.44 inH2O
2 in. - P2	≥ 160 kPa, 642 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.07 kPa, 0.28 inH2O
3 in. - P3	4 - 16 kPa, 16 - 64 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O
3 in. - P3	≥ 40 kPa, 160 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O

S26RH flanged ISO seal size - Mnemonic	Sensor URL	Seal error (process)	Direct mount system error (ambient)	Remote mount error (ambient)	1 metre capillary error (ambient)
1 13/16 in. - H1.5	≥ 70000 kPa, 10150 psi	0.74 kPa, 3 inH2O	0.67 kPa, 2.68 inH2O	0.62 kPa, 2.48 inH2O	0.31 kPa, 1.24 inH2O
2 1/16 in. - P1.5	≥ 70000 kPa, 10150 psi	0.64 kPa, 2.56 inH2O	1.25 kPa, 5.0 inH2O	1.14 kPa, 0.08 inH2O	0.38 kPa, 1.52 inH2O

<b>S26FA, S26FE</b> <b>fixed flange flush</b> <b>seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount system error (ambient)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
2 in. / DN 50 - P2	40 kPa, 160 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.11 kPa, 0.44 inH2O
2 in. / DN 50 - P2	≥160 kPa, 642 inH2O	0.23 kPa, 0.92 inH2O	0.16 kPa, 0.64 inH2O	0.14 kPa, 0.56 inH2O	0.07 kPa, 0.28 inH2O
2 in. / DN 50 - F2	≥ 4 kPa, 16 inH2O	0.05 kPa, 0.2 inH2O	0.04 kPa, 0.16 inH2O	0.04 kPa, 0.16 inH2O	0.03 kPa, 0.12 inH2O
3 / 4 in. / DN 80 / 100 - P3	4 - 16 kPa, 16 - 64 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O
3 / 4 in. / DN 80 / 100 - P3	≥ 40 kPa, 160 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O
3 / 4 in. / DN 80 / 100 - F3	≥ 4 kPa, 16 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.01 kPa, 0.04 inH2O

<b>S26MA, S26ME off-line flange</b> <b>seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount system error (ambient)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
2 1/2 in. - T2.5	≥ 4 kPa, 16 inH2O	0.26 kPa, 1.04 inH2O	0.11 kPa, 0.44 inH2O	0.1 kPa, 0.4 inH2O	0.08 kPa, 0.32 inH2O

<b>S26TT off-line threaded</b> <b>seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount system error (ambient)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
2 1/2 in. - T2.5	≥ 4 kPa, 16 inH2O	0.26 kPa, 1.04 inH2O	0.11 kPa, 0.44 inH2O	0.1 kPa, 0.4 inH2O	0.08 kPa, 0.32 inH2O

<b>S26SS sanitary and food</b> <b>seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount system error (ambient)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
2 in. / F50 - S2	40 kPa, 160 inH2O	0.7 kPa, 2.8 inH2O	0.93 kPa, 3.72 inH2O	0.87 kPa, 3.48 inH2O	0.68 kPa, 2.72 inH2O
2 in. / F50 - S2	≥160 kPa, 642 inH2O	0.7 kPa, 2.8 inH2O	0.93 kPa, 3.72 inH2O	0.87 kPa, 3.48 inH2O	0.44 kPa, 1.76 inH2O
2 in. - S2.5	40 kPa, 160 inH2O	0.16 kPa, 0.64 inH2O	0.19 kPa, 0.76 inH2O	0.18 kPa, 0.72 inH2O	0.14 kPa, 0.56 inH2O
2 in. - S2.5	≥160 kPa, 642 inH2O	0.16 kPa, 0.64 inH2O	0.19 kPa, 0.76 inH2O	0.18 kPa, 0.72 inH2O	0.09 kPa, 0.36 inH2O
3 / 4 in. / F80 - S3	4 - 16 kPa, 16 - 64 inH2O	0.06 kPa, 0.24 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.01 kPa, 0.04 inH2O
3 / 4 in. / F80 - S3	≥ 40 kPa, 160 inH2O	0.06 kPa, 0.24 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O
3 / 4 in. - S3.5	4 - 16 kPa, 16 - 64 inH2O	0.04 kPa, 0.16 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.01 kPa, 0.04 inH2O
3 / 4 in. - S3.5	≥ 40 kPa, 160 inH2O	0.04 kPa, 0.16 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O
1 1/2 in. - K1.5	≥ 40 kPa, 260 inH2O	0.2 kPa, 0.8 inH2O	0.5 kPa, 2 inH2O	NA	NA

<b>S26VN saddle &amp; socket</b> <b>seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount system error (ambient)</b>	<b>Remote mount error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
1 1/2 in. - P1.5	≥ 160 kPa, 642 inH2O	0.74 kPa, 3 inH2O	0.67 kPa, 2.68 inH2O	0.62 kPa, 2.48 inH2O	0.31 kPa, 1.24 inH2O

<b>S26WA, S26WE wafer</b> <b>seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Remote mount error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
1 1/2 in. / DN 40 - P1.5	≥ 160 kPa, 642 inH2O	0.74 kPa, 3 inH2O	0.62 kPa, 2.48 inH2O	0.31 kPa, 1.24 inH2O
1 1/2 in. / DN 40 - F1.5	≥ 160 kPa, 642 inH2O	0.15 kPa, 0.6 inH2O	0.15 kPa, 0.6 inH2O	0.08 kPa, 0.32 inH2O
2 in. / DN 50 - P2	40 kPa, 160 inH2O	0.23 kPa, 0.92 inH2O	0.14 kPa, 0.56 inH2O	0.11 kPa, 0.44 inH2O
2 in. / DN 50 - P2	≥160 kPa, 642 inH2O	0.23 kPa, 0.92 inH2O	0.14 kPa, 0.56 inH2O	0.07 kPa, 0.28 inH2O
2 in. / DN 50 - F2	≥ 4 kPa, 16 inH2O	0.05 kPa, 0.2 inH2O	0.04 kPa, 0.16 inH2O	0.03 kPa, 0.12 inH2O
3 in. / DN 80 - P3	4 - 16 kPa, 16 - 64 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O
3 in. / DN 80 - P3	≥ 40 kPa, 160 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O
3 in. / DN 80 - F3	≥ 4 kPa, 16 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O	0.01 kPa, 0.04 inH2O



# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

<b>S26CN Chemical Tee seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
3 in. - P3	4 - 16 kPa, 16 - 64 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.02 kPa, 0.08 inH2O
3 in. - P3	≥ 40 kPa, 160 inH2O	0.08 kPa, 0.32 inH2O	0.02 kPa, 0.08 inH2O	0.03 kPa, 0.12 inH2O

<b>S26BN Button type seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
1 in. - B1	≥ 8 MPa, 1160 psi	1.3 kPa, 5.2 inH2O	6.5 kPa, 26 inH2O	1.9 kPa, 7.6 inH2O

<b>S26UN Union connection seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
1 1/2 in. - Z1.5	≥ 160 kPa, 642 inH2O	0.29 kPa, 1.16 inH2O	0.62 kPa, 2.48 inH2O	0.31 kPa, 1.24 inH2O

<b>S26PN urea service seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Remote system error (ambient)</b>	<b>1 metre capillary error (ambient)</b>
1 1/2 in. - U1.5 (2 in. flange)	≥ 160 kPa, 642 inH2O	0.86 kPa, 3.44 inH2O	1.1 kPa, 4.4 inH2O	0.54 kPa, 2.16 inH2O
2 1/2 in. - U2.5 (3 in. flange)	≥ 40 kPa, 160 inH2O	0.18 kPa, 0.72 inH2O	0.06 kPa, 0.24 inH2O	0.11 kPa, 0.44 inH2O

<b>S26JN in-line seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount error (ambient)</b>
1 in. - J1	≥ 600 kPa, 87 psi	2.2 kPa, 8.8 inH2O	0.94 kPa, 3.76 inH2O
1 1/2 in. - J1.5	≥ 600 kPa, 87 psi	1.4 kPa, 5.6 inH2O	0.36 kPa, 1.44 inH2O
2 in. - J2	≥ 600 kPa, 87 psi	4.6 kPa, 18.4 inH2O	0.94 kPa, 3.76 inH2O
4 in. - J3	≥ 600 kPa, 87 psi	3.0 kPa, 12 inH2O	0.42 kPa, 1.68 inH2O

<b>S26KN paper seal size - Mnemonic</b>	<b>Sensor URL</b>	<b>Seal error (process)</b>	<b>Direct mount error (ambient)</b>
1 in. - Y1	≥ 160 kPa, 642 inH2O	1.2 kPa, 4.8 inH2O	0.64 kPa, 2.56 inH2O
1 in. - M1	≥ 160 kPa, 642 inH2O	0.6 kPa, 2.4 inH2O	0.64 kPa, 2.56 inH2O
1 1/2 in. M1.5 - M1.5A - M1.5B	≥ 40 kPa, 160 inH2O	0.2 kPa, 0.8 inH2O	0.48 kPa, 1.92 inH2O



## Physical Specification

(Refer to ordering information pages for variant availability related to specific model or versions code)

### **Model 266DRH only - materials of side without seal Process isolating diaphragms (\*)**

AISI 316 L ss; Hastelloy® C-276; Monel 400®; Tantalum.  
A remote seal can be selected with required diaphragm material (refer to high pressure side).

### **Process flanges, adapters, plugs and drain/vent valves (\*)**

AISI 316 L ss <sup>(1)</sup>; Hastelloy® C-276 <sup>(2)</sup>; Monel 400® <sup>(3)</sup>.

### **Bolts and nuts**

AISI 316 ss bolts Class A4–80 and nuts Class A4–70 per ISO 3506;  
AISI 316 ss bolts and nuts Class A4–50 per ISO 3506, in compliance with NACE MR0175 Class II (std. static only).  
Stainless steel per ASTM-A-453 grade 660D, in compliance with NACE MR0175 Class II (high static only).

### **Gaskets (\*)**

Viton®; PTFE.

### **Model 266DRH, 266HRH, 266NRH materials**

#### **Seal side process diaphragm (remote/direct mount seal) (\*)**

AISI 316 L ss; Hastelloy® C-276; Hastelloy® C-2000; Inconel 625; Tantalum; AISI 316 L ss or Hastelloy® C-276 with anti-stick coating; AISI 316 L ss with anti-corrosion coating; AISI 316 L ss gold plated; Superduplex ss (UNS S32750 to ASTM SA479); Diaflex (AISI with anti-abrasion treatment).

### **Extension material (\*)**

AISI 316 L ss (also for Diaflex and gold plated diaphragms); Hastelloy® C-276; AISI 316 L ss or Hastelloy® C-276 with coating same as diaphragm

### **Seal side fill fluid**

Silicone oil-PMX 200®; Silicone oil for high temperature; Low viscosity silicone oil-Baysilone® M5; Inert-Galden®; Inert-Halocarbon® 4.2; Silicone Polymer-Syltherm XLT®; Glycerin Water; Vegetable oil-Neobee® M-20; Mineral oil-Esso Marcol 152®.

### **Sensor fill fluid**

Silicone oil; Inert fill (Halocarbon® 4.2 or Galden®).

### **Sensor housing**

AISI 316 L ss.

### **Electronic housing and covers**

Aluminium alloy (copper content ≤ 0.3 %) with baked epoxy finish (colour RAL9002); AISI 316 L ss;  
AISI 316 L ss with two components epoxy mastic coated with acrylic epoxy finish (colour aluminium grey), with antistatic agents according to CEI EN 60079.

### **Covers O-ring**

Buna N.

### **Mounting bracket (\*\*)**

Zinc plated carbon steel with chrome passivation; AISI 316 ss; AISI 316 L ss.

### **Local adjustments (zero, span and write protect)**

For Standard HART version:

- Internal for zero and span (on communication board)
- External non-intrusive for zero, span and write protect in glass filled polyphenylene oxyde, removable (code R1).

For all other versions:

- External non-intrusive for zero, span and write protect in glass filled polyphenylene oxyde, removable.

### **Plates**

Transmitter nameplate: AISI 316 ss screwed to the electronics housing.

Certification plate and optional tag/calibration plate : self-adhesive attached to the electronics housing or AISI 316 ss fastened to the electronics housing with rivets or screws.

Optional wired-on customer data plate: AISI 316 ss.

Laser printing on metal or thermal printing on self-adhesive.

For AISI 316 L ss housing it is mandatory to select option I2 or I3 for plates in AISI 316 ss.

(\*)Wetted parts of the transmitter.

(\*\*) U-bolt material: high-strength alloy steel or AISI 316 L ss;  
bolts/nuts material: high-strength alloy steel or AISI 316 ss.

<sup>(1)</sup> Supplied as AISI 316 L or as ASTM A351 Grade CF-3M

<sup>(2)</sup> Supplied as Hastelloy C-276 or as ASTM A494 alloy CW-12MW

<sup>(3)</sup> Supplied as Monel 400 or as ASTM A494 Grade M-35-1

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## Calibration

Standard: at maximum span, zero based range, ambient temperature and pressure;

Optional: at specified range and ambient conditions.

## Optional extras

### Mounting brackets (code Bx)

For vertical and horizontal 60mm. (2in) pipes or wall mounting. (EXCEPT U-BOLT ASSEMBLY WHICH IS NOT SUPPLIED FOR WALL MOUNTING, PARTS ARE THE SAME FOR PIPE AND WALL BRACKET OPTIONS, AS PER RELEVANT MATERIALS).

### Display (code Lx)

4-position (at 90°) user orientable, except "LS".

### Optional plates (code Ix)

Code I2: AISI 316 ss plate with laser printed tag (up to 31 characters) and calibration details (up to 31 characters: lower and upper range values and engineering unit) fixed onto transmitter housing.

Code I1: AISI 316 ss wired-on plate with laser printed customized data (4 lines of 32 characters with 4 mm/0.16 in. height).

### Surge protection (code S2)

### Test Certificates (test, design, calibration, material traceability) (codes Cx and Hx)

### Tag and manual language (codes Tx and Mx)

### Communication connectors (code Ux)

### Process connections 266DRH only - side without seal

on conventional flanges : 1/4 in. – 18 NPT on process axis

on adapters : 1/2 in. – 14 NPT on process axis

fixing threads: 7/16 in. – 20 UNF at 41.3mm centre distance

Refer to S26 seal data sheet for process connection variants through remote seal.

### Gasket seat finish for seals

Smooth (ASME or EN): 0.8 µm (Ra)

Serrated (ASME): 3.2 to 6.3 µm (Ra)

Serrated (EN 1092-1 Type B1): 3.2 to 12.5 µm (Ra)

Serrated (EN 1092-1 Type D and E): according to standard

## Electrical connections

Two 1/2 in. – 14 NPT or M20x1.5 threaded conduit entries, direct on housing. Only M20x1.5 for WirelessHART with one port used for antenna.

Special communication connector (option)

— HART: straight or angle Harting Han 8D connector and one plug.

— FOUNDATION Fieldbus, PROFIBUS PA: M12x1 or 7/8 in.

One certified stainless steel plug (supplied loose with thread according to housing entries) available as option.

## Terminal block

HART version: three terminals for signal/external meter wiring up to 2.5 mm<sup>2</sup> (14 AWG), also connection points for test and communication purposes.

WirelessHART version: connection points for test and communication purposes; additional fast connection for external harvesting unit.

Fieldbus versions: two terminals for signal wiring (bus connection) up to 2.5 mm<sup>2</sup> (14 AWG)

## Grounding

Internal and external 6 mm<sup>2</sup> (10 AWG) ground termination points are provided.

## Mounting position

Transmitter can be mounted in any position.

Electronics housing may be rotated to any position. A positive stop prevents over travel.

## Mass (without options and seals)

models 266DRH: 4 kg approx (8.8 lb)

models 266HRH, 266NRH: 2 kg approx (4.4 lb)

Add 1.5 kg (3.4 lb) for AISI housing.

Add 650 g (1.5 lb) for packing.

Consider additional weight up to 50 kg (up to 110 lb) for seals.

## Packing

Carton

## Configuration

### Transmitter with HART communication and 4 to 20 mA Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Engineering Unit	kPa
4 mA	Zero
20 mA	Upper Range Limit (URL)
Output	Linear
Damping	1 s
Transmitter failure mode	Upscale
Software tag (8 characters max)	Blank
Optional LCD display	PV in kPa; output in mA and in percentage on bargraph

Any or all the above configurable parameters, including Lower range-value and Upper range-value which must be the same unit of measure, can be easily changed using the HART hand-held communicator or by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O-ring and drain/vent materials and meter code option.

### Custom configuration (option N6)

The following data may be specified in addition to the standard configuration parameters:

Descriptor	16 alphanumeric characters
Message	32 alphanumeric characters
Date	Day, month, year

For HART protocol available engineering units of pressure measure are :

Pa, kPa, MPa

inH<sub>2</sub>O@4 °C, mmH<sub>2</sub>O@4 °C, psi

inH<sub>2</sub>O@20 °C, ftH<sub>2</sub>O@20 °C, mmH<sub>2</sub>O@20 °C

inHg, mmHg, Torr

g/cm<sup>2</sup>, kg/cm<sup>2</sup>, atm

mbar, bar

These and others are available for PROFIBUS and FOUNDATION Fieldbus.

### Transmitter with WirelessHART communication

#### Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Engineering Unit	kPa
Output scale 0 %	Lower Range Limit (LRL)
Output scale 100 %	Upper Range Limit (URL)
Output	Linear
Update rate	16 s
Software tag (8 characters max)	Blank
Optional LCD display	PV in kPa; output in percentage on bargraph

Any or all the above configurable parameters, including Lower range-value and Upper range-value which must be the same unit of measure, can be easily changed using the HART hand-held communicator or by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O-ring and drain/vent materials and meter code option.

### Custom configuration (option N6)

The following data may be specified in addition to the standard configuration parameters:

Descriptor	16 alphanumeric characters
Message	32 alphanumeric characters
Date	Day, month, year

# Model 266DRH Differential

# Model 266HRH Gauge

# Model 266NRH Absolute

## Transmitter with PROFIBUS PA communication

### Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Measure Profile	Pressure
Engineering Unit	kPa
Output scale 0 %	Lower Range Limit (LRL)
Output scale 100 %	Upper Range Limit (URL)
Output	Linear
Hi-Hi Limit	Upper Range Limit (URL)
Hi Limit	Upper Range Limit (URL)
Low Limit	Lower Range Limit (LRL)
Low-Low Limit	Lower Range Limit (LRL)
Limits hysteresis	0.5 % of output scale
PV filter	0 s
Address (set by local key)	126
Tag	32 alphanumeric characters
Optional LCD display	PV in kPa; output in percentage on bargraph

Any or all the above configurable parameters, including the range values which must be the same unit of measure, can be easily changed by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O-ring and drain/vent materials and meter code option.

### Custom configuration (option N6)

The following data may be specified in addition to the standard configuration parameters:

Descriptor	32 alphanumeric characters
Message	32 alphanumeric characters
Date	Day, month, year

## Transmitter with FOUNDATION Fieldbus communication

### Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and the analog input function block FB1 is configured as follows:

Measure Profile	Pressure
Engineering Unit	kPa
Output scale 0 %	Lower Range Limit (LRL)
Output scale 100 %	Upper Range Limit (URL)
Output	Linear
Hi-Hi Limit	Upper Range Limit (URL)
Hi Limit :	Upper Range Limit (URL)
Low Limit	Lower Range Limit (LRL)
Low-Low Limit	Lower Range Limit (LRL)
Limits hysteresis	0.5 % of output scale
PV filter time	0 s
Tag	32 alphanumeric characters
Optional LCD display	PV in kPa; output in percentage on bargraph

The analog input function block FB2 and FB3 are configured respectively for the sensor temperature measured in °C and for the static pressure measured in MPa.

Any or all the above configurable parameters, including the range values, can be changed using any host compliant to FOUNDATION fieldbus. The transmitter database is customized with specified flange type and material, O-ring and drain/vent materials and meter code option.


### Custom configuration (option N6)

The following data may be specified in addition to the standard configuration parameters:


Descriptor	32 alphanumeric characters
Message	32 alphanumeric characters
Date	Day, month, year

## MOUNTING DIMENSIONS (not for construction unless certified) – dimensions in mm. (in.)

### 266DRH with barrel housing and remote seal(s)

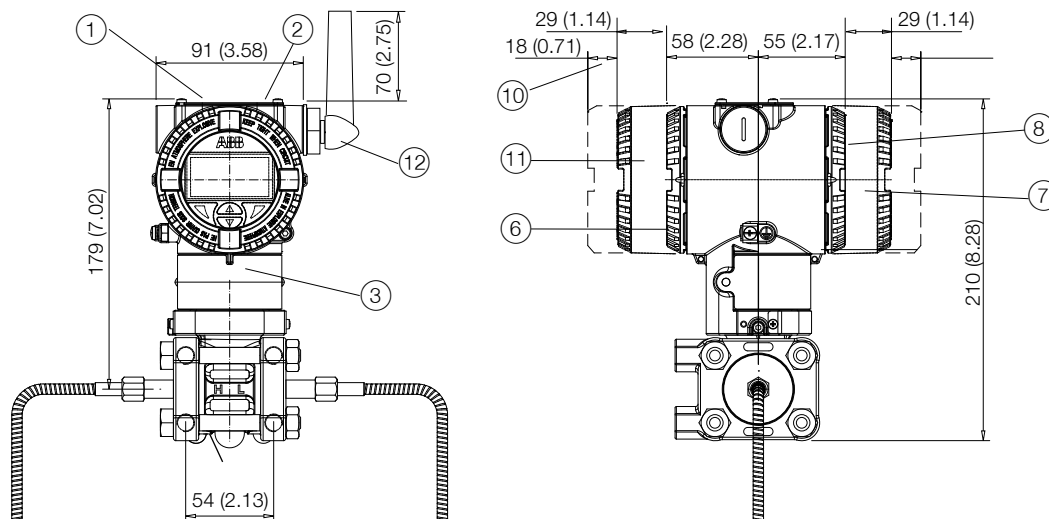

- ① Adjustments | ② Identification plate | ③ Certification plate | ④ Drain/vent valve | ⑤ Process connection | ⑥ Terminal side |  
 ⑦ L1 and L5 integral display housing | ⑧ Electronic side | ⑨ Adapter | ⑩ Space for cover removal | ⑪ Battery housing of WirelessHART version |  
 ⑫ Antenna of WirelessHART version

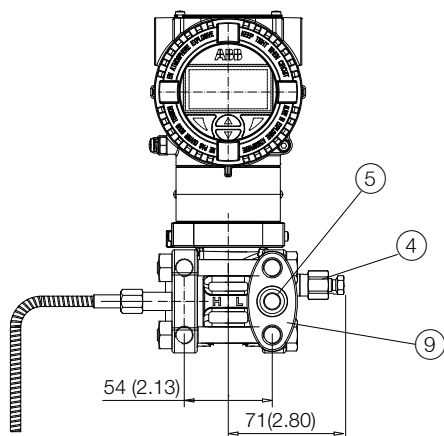


NOTE : For 266DRH using one seal only, the threaded connection (1/4 in. – 18 NPT direct or 1/2 in. – 14 NPT through adapter) of conventional flange, gasket groove and gaskets are in accordance with IEC 61518.

Bolting threads for fixing adapter or other devices (i.e. manifold etc.) on process flange is  $\frac{7}{16}$  in. – 20 UNF.



Negative side of gauge measurement version 266DRHxP is provided with a removable filter, granting protection to the atmospheric pressure reference.

Model 266DRH Differential  
Model 266HRH Gauge  
Model 266NRH Absolute

266DRH with barrel housing and remote seal(s) on bracket for vertical or horizontal 60 mm. (2 in.) pipe

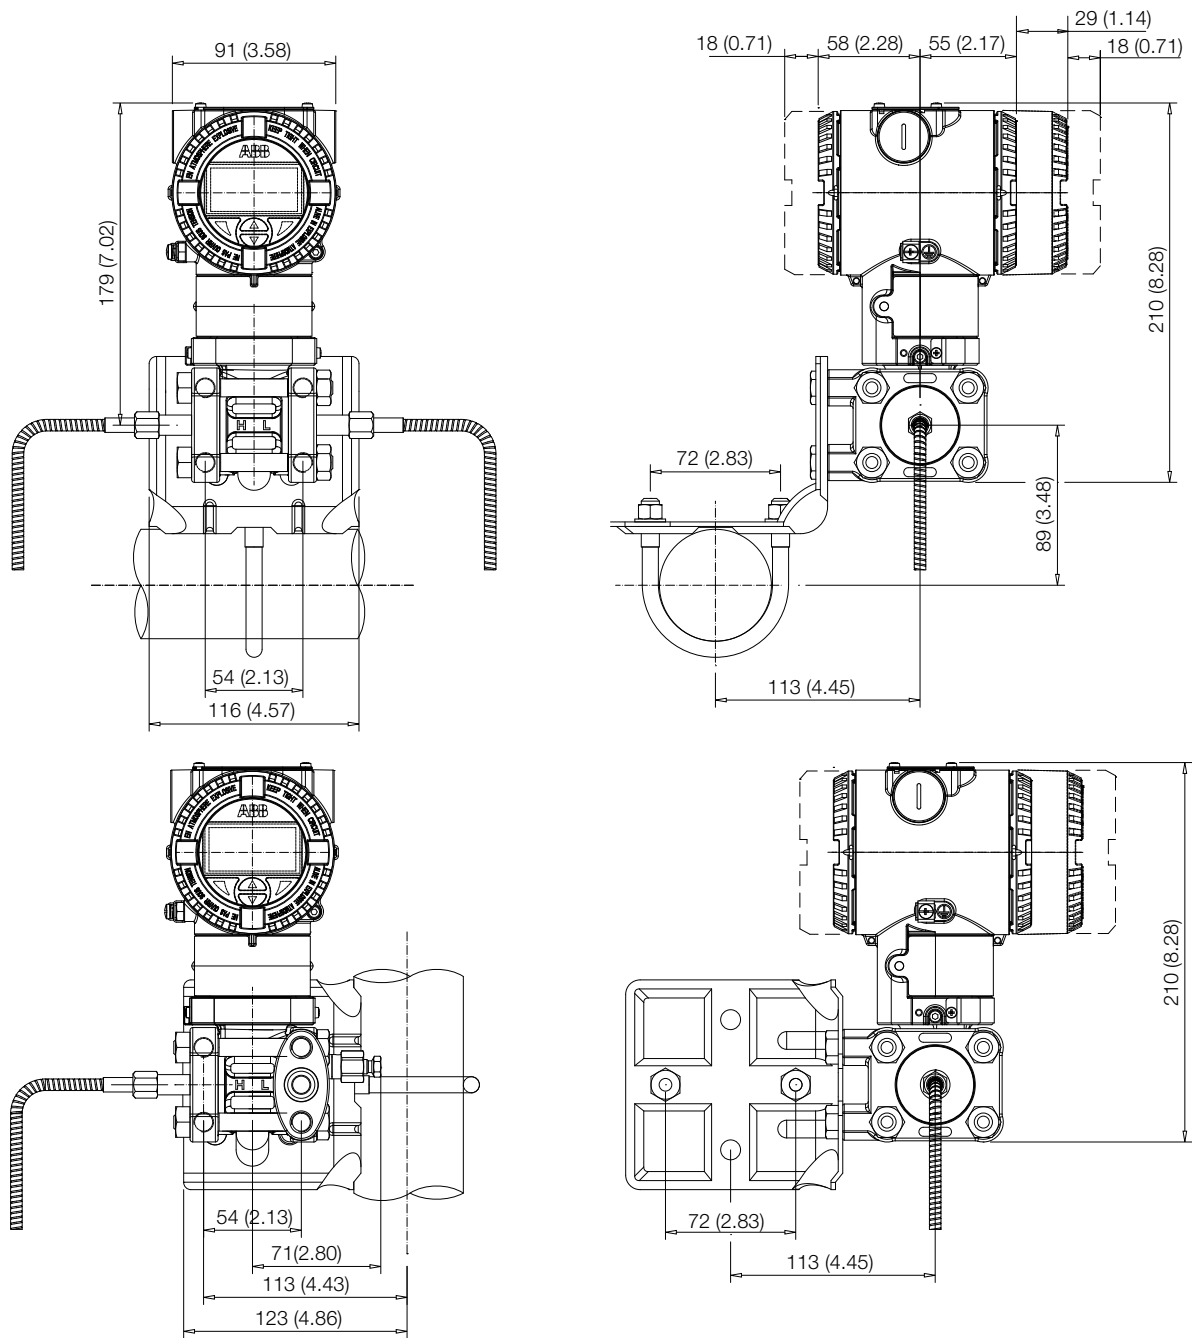


266DRH with DIN housing and remote seal(s) on bracket for vertical or horizontal 60 mm. (2 in.) pipe

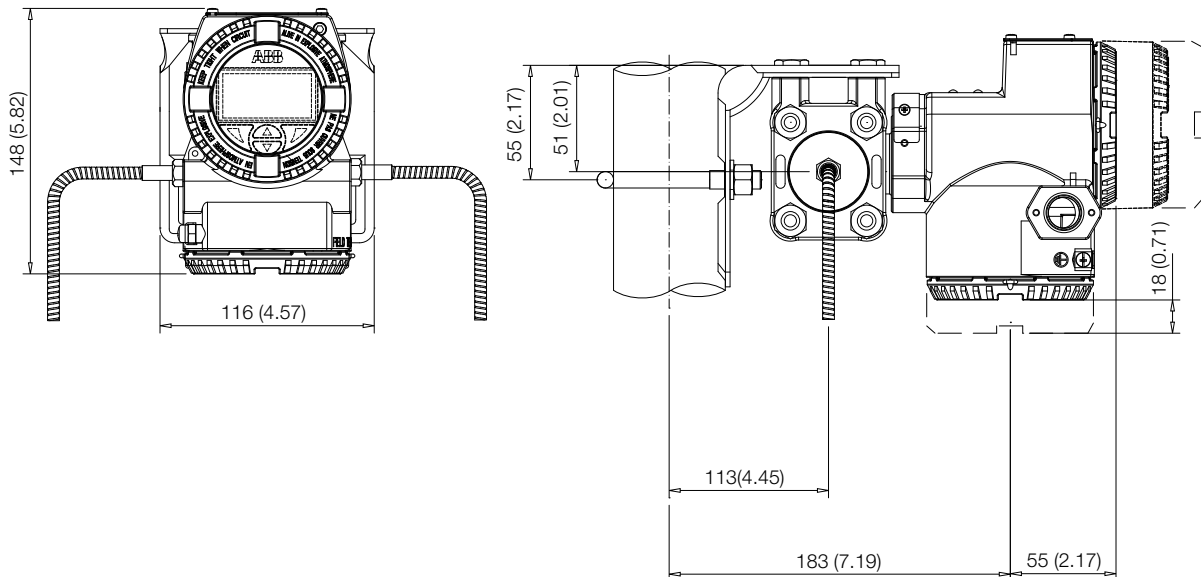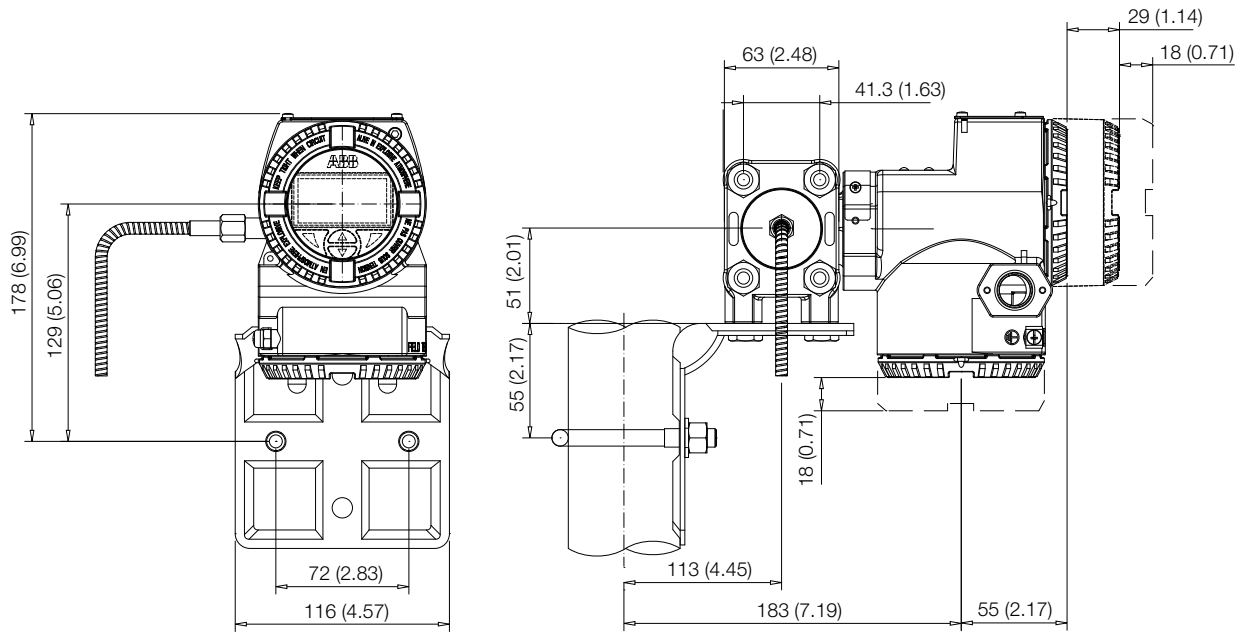


Model 266DRH Differential  
Model 266HRH Gauge  
Model 266NRH Absolute

266DRH with barrel housing and remote seal(s) on flat bracket for vertical or horizontal 60 mm. (2 in.) pipe

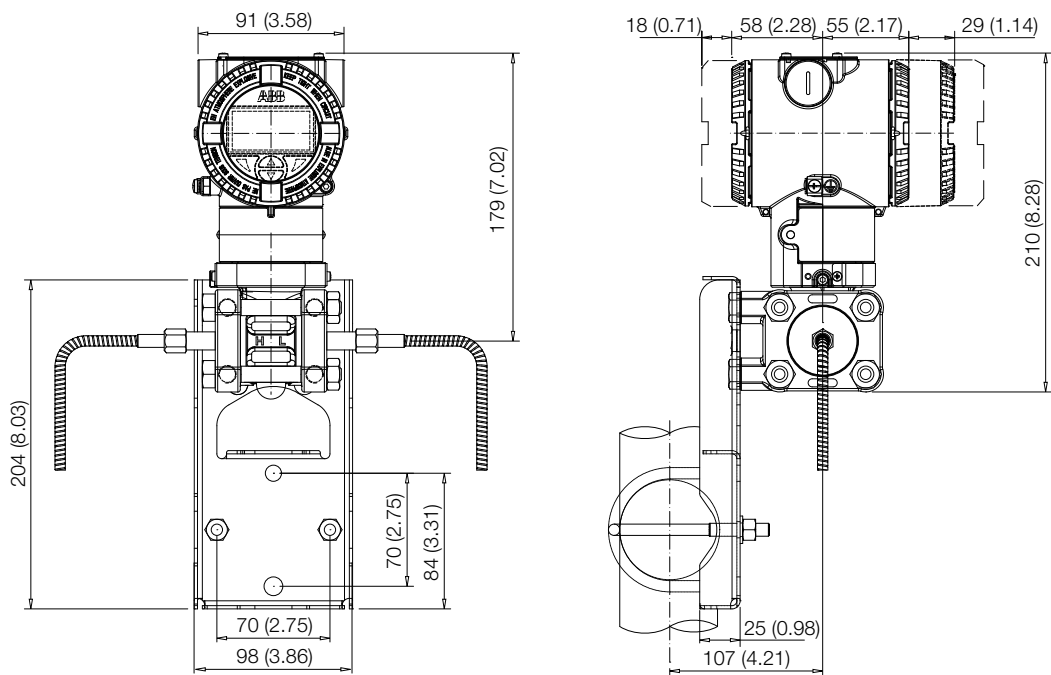


266HRH, 266NRH with barrel housing and remote seal(s) on bracket for vertical or horizontal 60 mm. (2 in.) pipe sensors F, H, M, P, Q, S, W

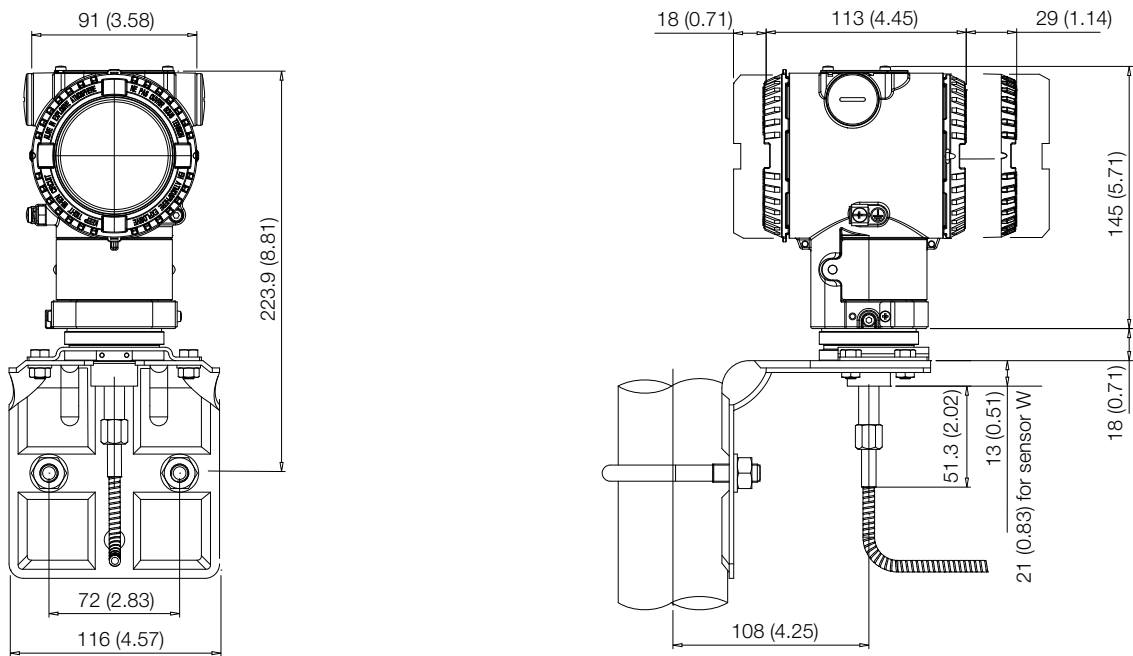




**266HRH, 266NRH with barrel housing and remote seal(s) on bracket for vertical or horizontal 60 mm. (2 in.) pipe sensors Z**

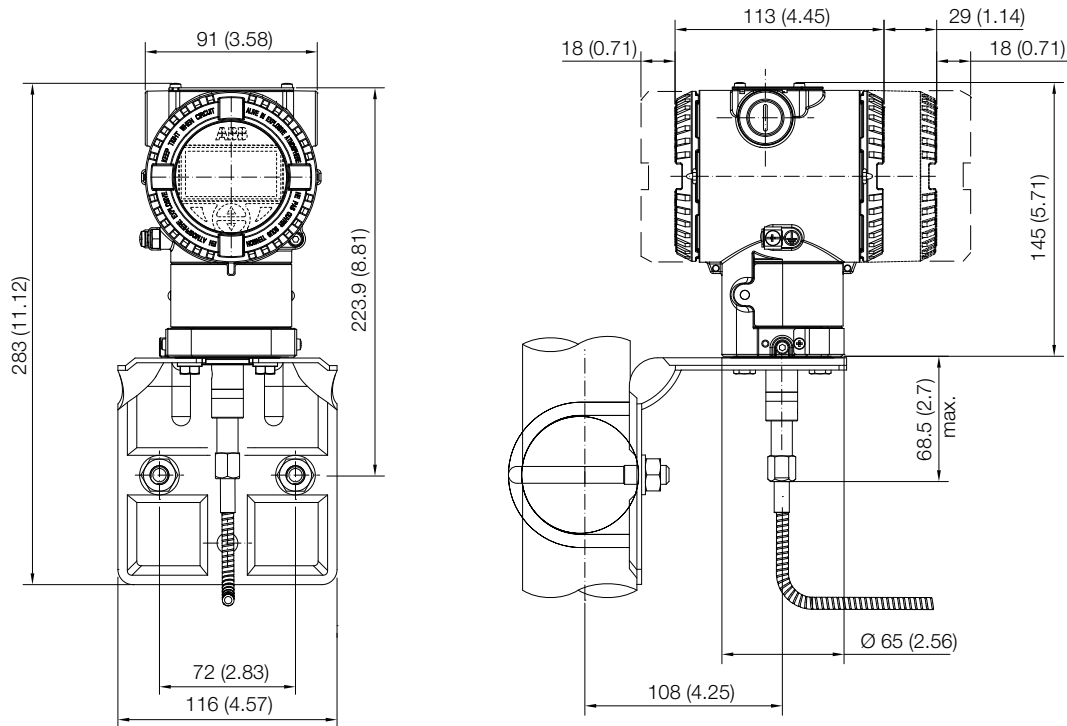

**266HRH, 266NRH with DIN housing and remote seal(s) on bracket for vertical or horizontal 60 mm. (2 in.) pipe sensors F, H, M, P, Q, S, W**

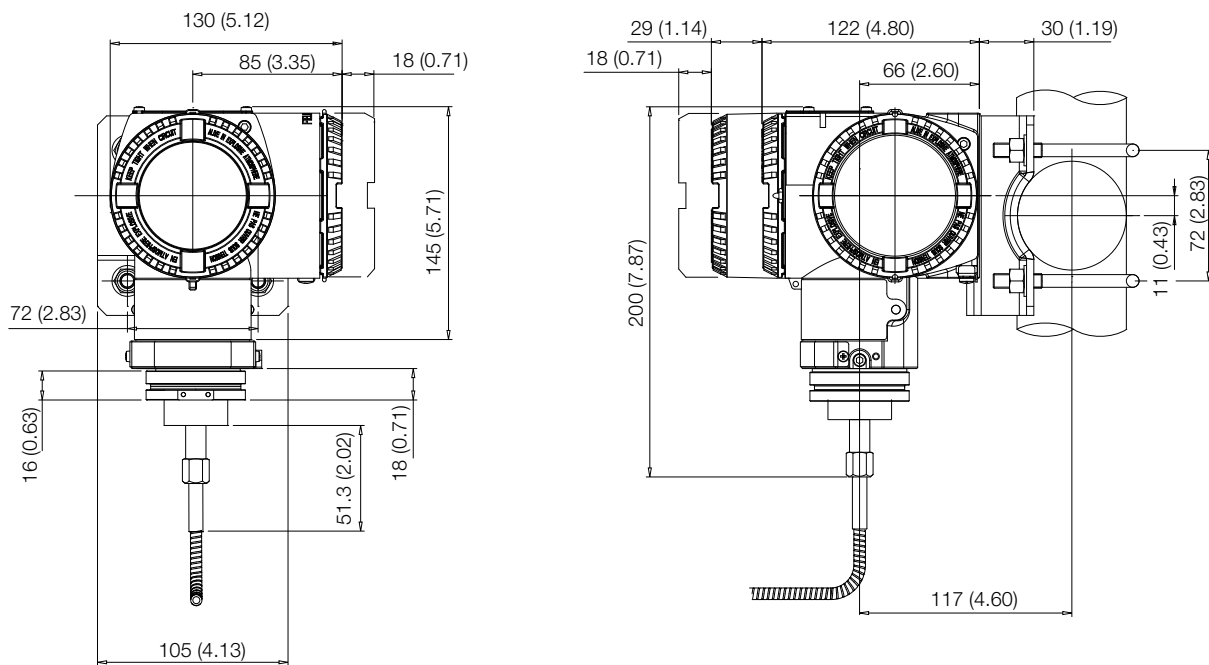


# Model 266DRH Differential


## Model 266HRH Gauge

## Model 266NRH Absolute


### S26RA, S26RE, S26RJ Rotating flange diaphragm seals (flush and extended)

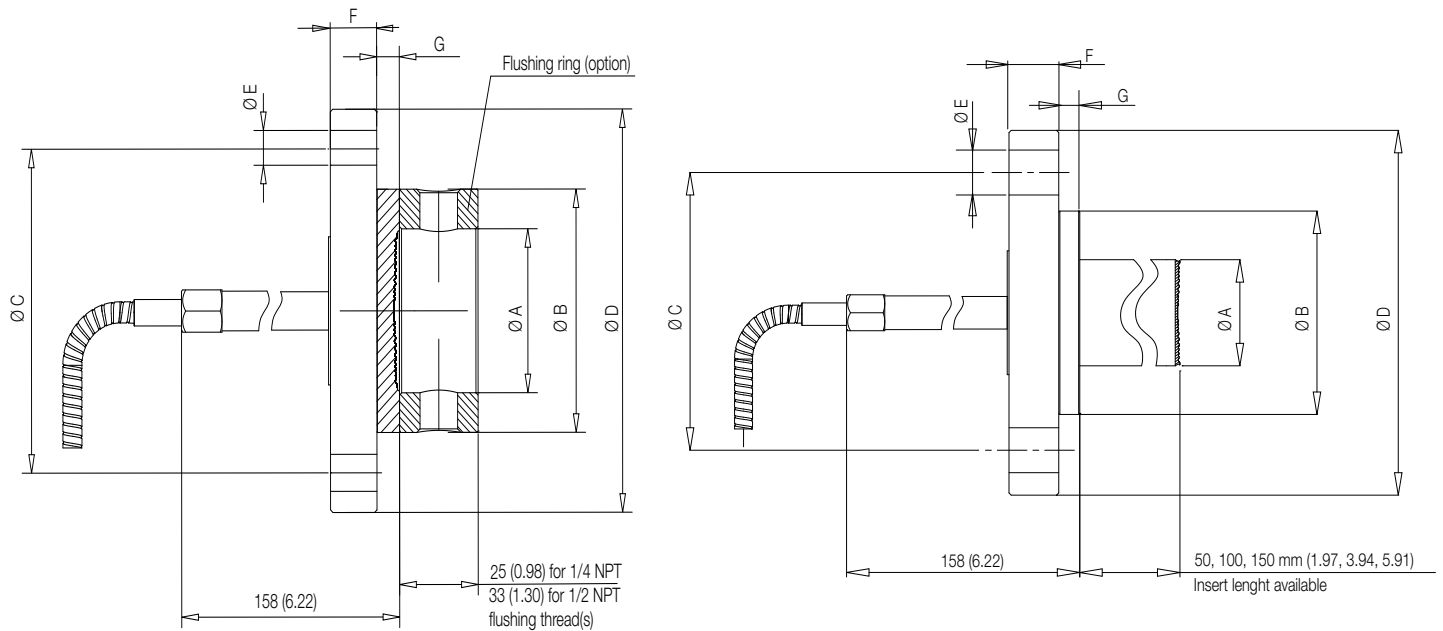


### 266DDH with barrel housing and direct mount seal S26RA/S26RE/S26RJ rotating flange Raised Face flush diaphragm

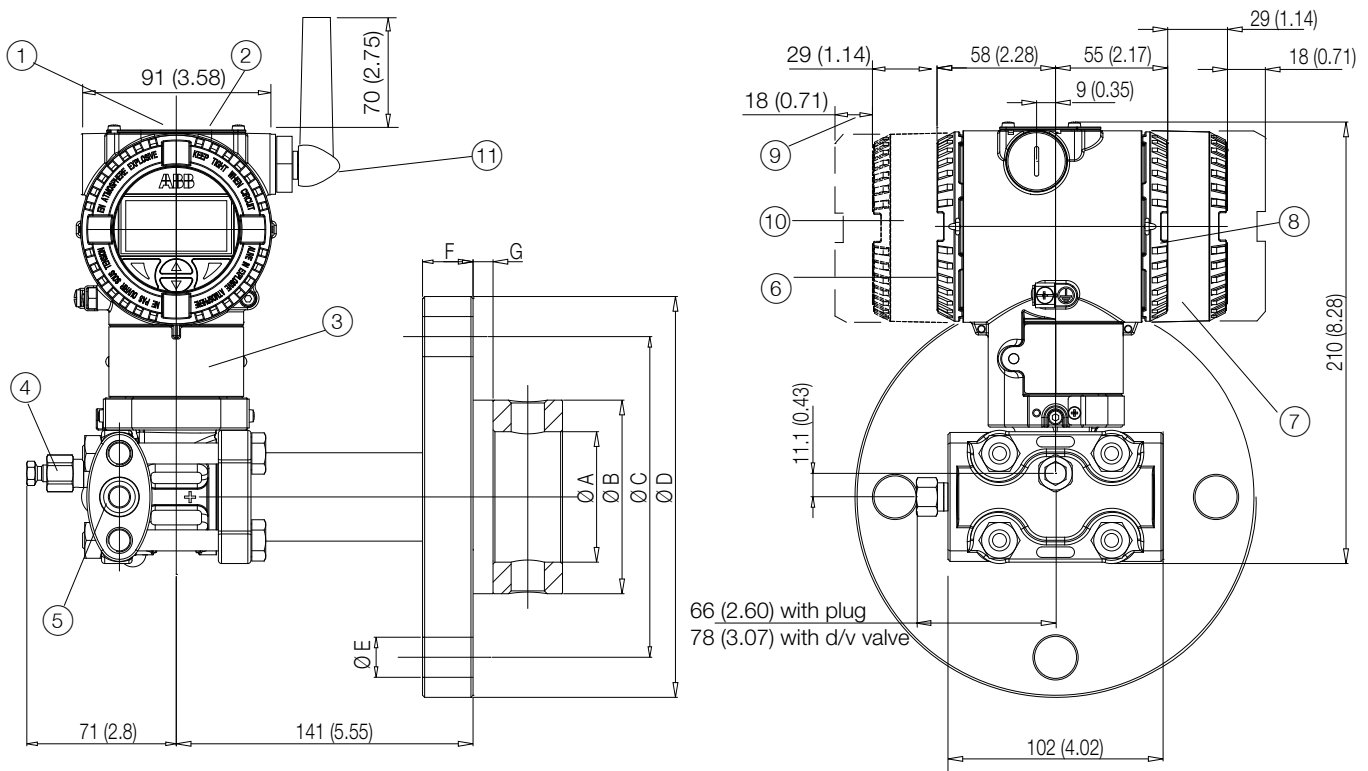

**266DDH with DIN housing and direct mount seal S26RA/S26RE/S26RJ rotating flange Raised Face extended diaphragm**

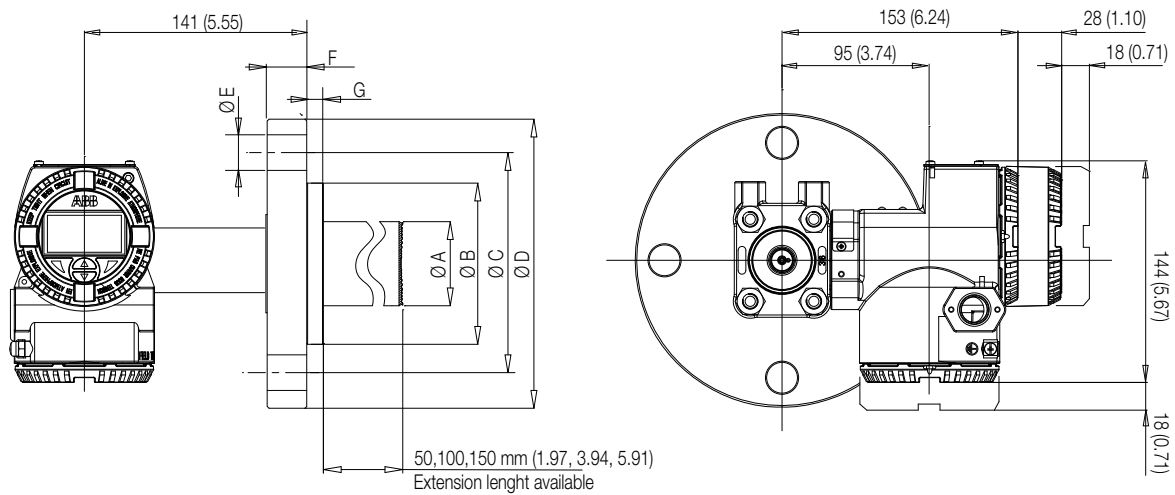

**266HDH/266NDH with barrel housing and direct mount seal S26RA/S26RE/S26RJ flanged Raised Face extended diaphragm**

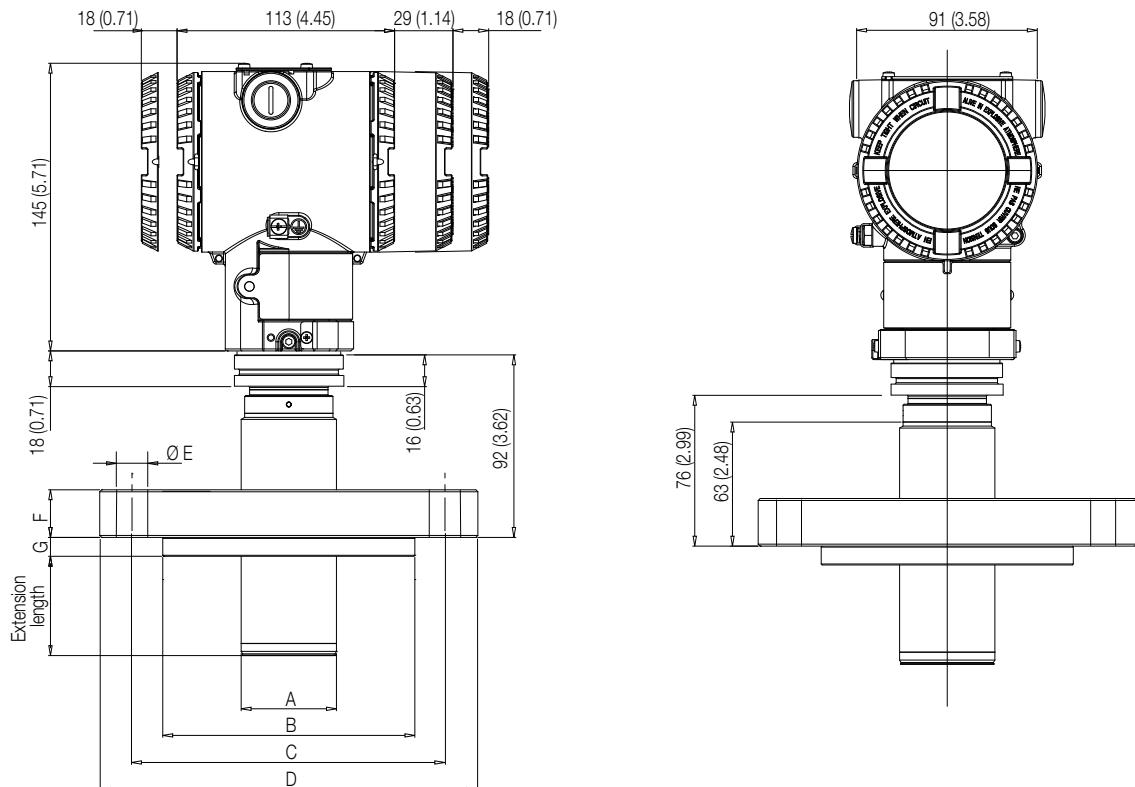

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

Size/Rating	Dimensions mm. (in.) for S26RA										
	A (dia)				B (dia)	C (dia)	D (dia)	E (dia)	F (Note 1)	G	N° of holes
	extended diaphragm	flush diaphragm		flushing ring							
		std.	low thick.	internal dia							
2 in. ASME CL 150	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	120.65 (4.75)	152.4 (6)	19.1 (0.79)	17.5 (0.6)	9.5 (0.37)	4
2 in. ASME CL 300	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	20.8 (0.8)	9.5 (0.37)	8
2 in. ASME CL 600	NA	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	25.4 (1)	9.5 (0.37)	8
2 in. ASME CL 900	NA	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	165 (6.5)	215.9 (8.5)	26 (1.02)	38.1 (1.5)	9.5 (0.37)	8
2 in. ASME CL 1500	NA	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	165 (6.5)	215.9 (8.5)	26 (1.02)	38.1 (1.5)	9.5 (0.37)	8
3 in. ASME CL 150	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	152.4 (6)	190.5 (7.5)	19.1 (0.79)	22.4 (0.88)	9.5 (0.37)	4
3 in. ASME CL 300	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.88)	26.9 (1.1)	9.5 (0.37)	8
3 in. ASME CL 600	NA	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.88)	31.8 (1.3)	9.5 (0.37)	8
3 in. ASME CL 900	NA	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	190.5 (7.5)	241 (9.48)	26 (1.02)	38.1 (1.5)	9.5 (0.37)	8
3 in. ASME CL1500	NA	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	203.2 (8)	266.7 (10.5)	31.75 (1.25)	47.7 (1.88)	9.5 (0.37)	8
4 in. ASME CL 150	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	157.2 (6.2)	190.5 (7.5)	228.6 (9)	19.1 (0.79)	22.4 (0.88)	9.5 (0.37)	8
4 in. ASME CL 300	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	157.2 (6.2)	200.2 (7.88)	254 (10)	22 (0.86)	30.2 (1.19)	9.5 (0.37)	8

Size/Rating	Dimensions mm. (in.) for S26RE										
	A (dia)				B (dia)	C (dia)	D (dia)	E (dia)	F (Note 2)	G	N° of holes
	extended diaphragm	flush diaphragm		flushing ring internal dia							
		std.	low thick.								
DN 50 EN PN 16	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	15 (0.58)	9.5 (0.37)	4
DN 50 EN PN 40	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	18 (0.67)	9.5 (0.37)	4
DN 50 EN PN 63	NA	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	135 (5.31)	180 (7.08)	22 (0.86)	23 (0.9)	9.5 (0.37)	4
DN 50 EN PN 100	NA	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	145 (5.71)	195 (7.67)	26 (1.02)	27 (1.06)	9.5 (0.37)	4
DN 80 EN PN 16	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	17 (0.67)	9.5 (0.37)	8
DN 80 EN PN 40	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	21 (0.83)	9.5 (0.37)	8
DN 80 EN PN 63	NA	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	170 (6.7)	215 (8.46)	22 (0.86)	25 (0.98)	9.5 (0.37)	8
DN 80 EN PN 100	NA	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	180 (7.08)	230 (9.05)	26 (1.02)	33 (1.3)	9.5 (0.37)	8
DN 100 EN PN 16	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	158 (6.22)	180 (7.08)	220 (8.66)	18 (0.71)	17 (0.67)	9.5 (0.37)	8
DN 100 EN PN 40	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	162 (6.38)	190 (7.48)	235 (9.25)	22 (0.86)	21 (0.83)	9.5 (0.37)	8

Size/Rating	Dimensions mm. (in.) for S26RJ							
	A (dia) flush diaphragm	B (dia)	C (dia)	D (dia)	E (dia)	F (Note 3)	G	N° of holes
A50 Class 10K	60 (2.36)	96 (3.78)	120 (4.72)	155 (6.1)	19 (0.75)	16 (0.63)	9.5 (0.37)	4
A50 Class 20K	60 (2.36)	96 (3.78)	120 (4.72)	155 (6.1)	19 (0.75)	18 (0.71)	9.5 (0.37)	8
A50 Class 40K	60 (2.36)	104.3 (4.11)	130 (5.12)	165 (6.5)	19 (0.75)	26 (1.02)	9.5 (0.37)	8
A80 Class 10K	89 (3.5)	126 (4.96)	150 (5.91)	185 (7.28)	19 (0.75)	18 (0.71)	9.5 (0.37)	8
A80 Class 20K	89 (3.5)	132 (5.2)	160 (6.3)	200 (7.87)	23 (0.91)	22 (0.87)	9.5 (0.37)	8
A80 Class 40K	89 (3.5)	139.4 (5.49)	170 (6.69)	210 (8.27)	23 (0.91)	32 (1.26)	9.5 (0.37)	8
A100 Class 10K	89 (3.5)	151 (5.94)	175 (6.89)	210 (8.27)	19 (0.75)	18 (0.71)	9.5 (0.37)	8
A100 Class 20K	89 (3.5)	160 (6.3)	185 (7.28)	225 (8.86)	23 (0.91)	24 (0.94)	9.5 (0.37)	8



Note 1 - Flange thickness tolerance is +3.0 / -0.0 mm. (+0.12 / 0.0 in.).

Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm. (+0.04 / 0.05 in.) up to 18 mm. or ±1.5 mm. (±0.06 in.) from 18 to 50 mm.

Note 3 - Flange thickness tolerance is +1.5 / -0.0 mm. (+0.06 / 0.0 in.) up to Class 20K or +2.0 / -0.0 mm. (+0.08 / 0.0 in.) from Class 20K to Class 50K.

S26RH Rotating flange diaphragm seals according to ISO 10423 (based on API 6A specification)

266HDH with barrel housing and direct mount seal S26RH flanged diaphragm seals (flush) to ISO 10423

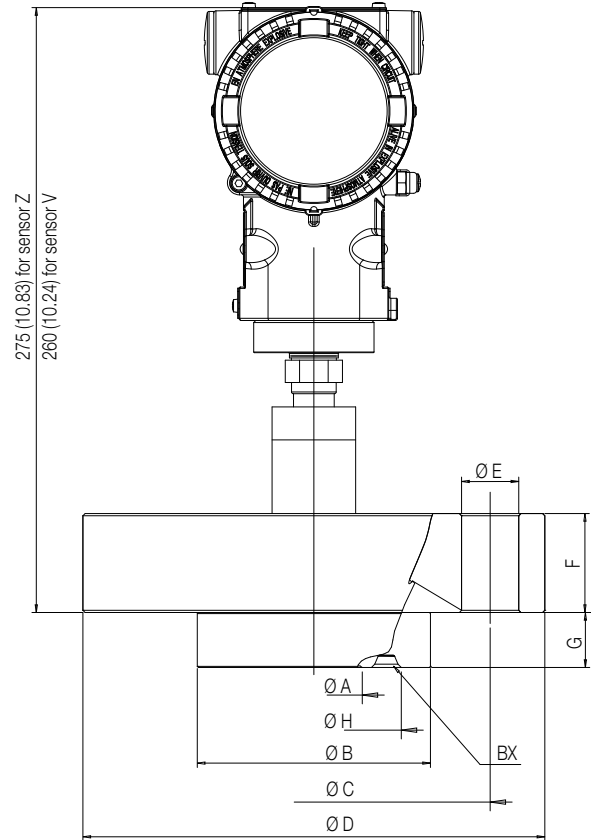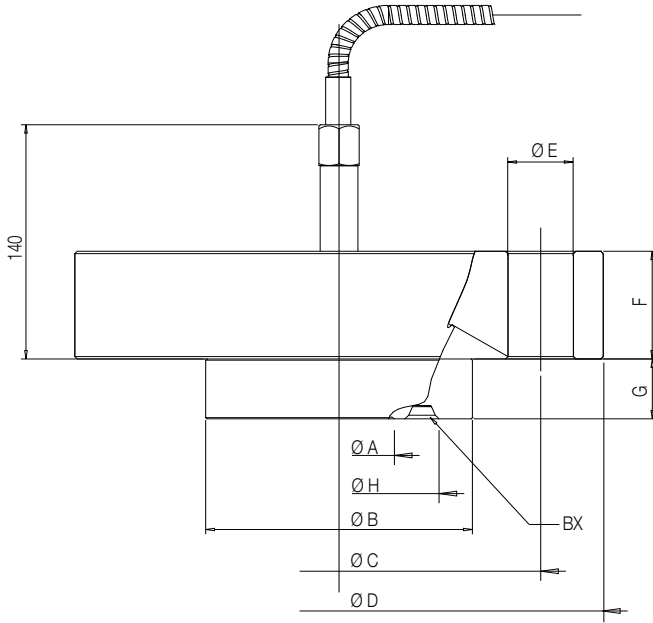


Size/Rating	Dimensions mm. (in.) for S26RH									
	A (dia)	B (dia)	C (dia)	D (dia)	E (dia)	F	G	H (dia)	BX	N° of holes
1 13/16 in. API 10000	40 (1.57)	105.5 (4.15)	146.1 (5.75)	185 (7.28)	23 (0.91)	42.1 (1.66)	25 (0.98)	77.77 (3.06)	BX 151	8
1 13/16 in. API 15000	40 (1.57)	105.5 (4.15)	160.3 (6.31)	210 (8.27)	26 (1.02)	45 (1.77)	25 (0.98)	77.77 (3.06)	BX 151	8
2 1/16 in. API 10000	50 (1.97)	112.5 (4.43)	158.8 (6.25)	200 (7.87)	23 (0.91)	44.1 (1.74)	25 (0.98)	86.23 (3.40)	BX 152	8
2 1/16 in. API 15000	50 (1.97)	112.5 (4.43)	174.6 (6.87)	220 (8.66)	26 (1.02)	50.8 (2.00)	25 (0.98)	86.23 (3.40)	BX 152	8

# Model 266DRH Differential

## Model 266HRH Gauge


## Model 266NRH Absolute

### S26RR Rotating flange diaphragm seals - Ring Joint (RJ)

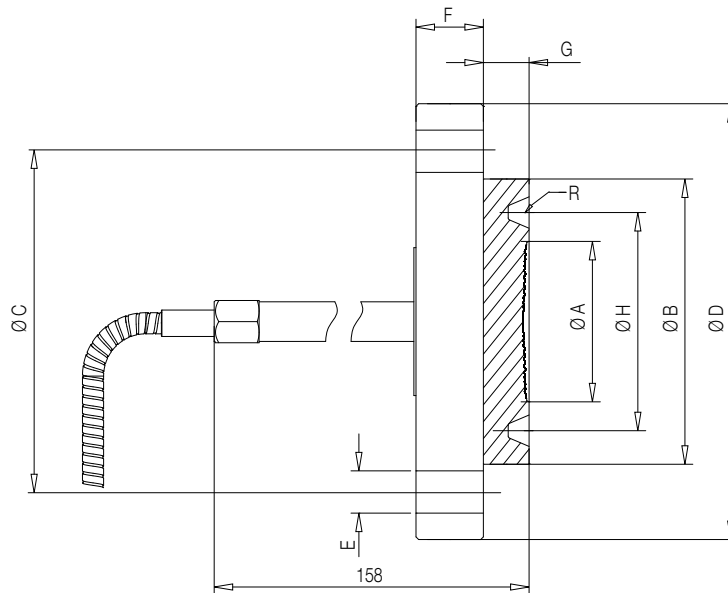


Size/Rating	Dimensions mm. (in.) for S26RR									N° of holes
	A (dia)	B (dia)	C (dia)	D (dia)	E (dia)	F	G	H (dia)	R	
1-1/2 in. ASME CL 150	48 (1.89)	83 (3.27)	98.6 (3.88)	127 (5)	15.75 (0.62)	17.5 (0.69)	17.3 (0.68)	65.1 (2.56)	R19	4
1-1/2 in. ASME CL 300	48 (1.89)	90 (3.54)	114.3 (4.5)	155.5 (6.12)	22.35 (0.88)	20.6 (0.81)	17.3 (0.68)	68.3 (2.69)	R20	4
1-1/2 in. ASME CL 600	48 (1.89)	90 (3.54)	114.3 (4.5)	155.5 (6.12)	22.35 (0.88)	22.4 (0.88)	17.3 (0.68)	68.3 (2.69)	R20	4
1-1/2 in. ASME CL 900/1500	48 (1.89)	92 (3.62)	124 (4.88)	177.8 (7)	28.45 (1.12)	31.8 (1.25)	20.8 (0.82)	68.3 (2.69)	R20	4
2 in. ASME CL 150	60 (2.36)	102 (4.02)	120.65 (4.75)	152.4 (6)	19.05 (0.75)	19.05 (0.75)	17.3 (0.68)	82.6 (3.25)	R22	4
2 in. ASME CL 300	60 (2.36)	108 (4.25)	127 (5)	165.1 (6.5)	19.05 (0.75)	22.35 (0.88)	17.3 (0.68)	82.6 (3.25)	R23	8
2 in. ASME CL 600	60 (2.36)	108 (4.25)	127 (5)	165.1 (6.5)	19.05 (0.75)	25.4 (1)	17.3 (0.68)	82.6 (3.25)	R23	8
2 in. ASME CL 900/1500	60 (2.36)	124 (4.88)	165 (6.5)	215.9 (8.5)	25.4 (1)	38.1 (1.5)	20.8 (0.82)	95.3 (3.75)	R24	8
3 in. ASME CL 150	89 (3.5)	133 (5.24)	152.4 (6)	190.5 (7.5)	19.05 (0.75)	23.87 (0.94)	17.3 (0.68)	114.3 (4.5)	R29	4
3 in. ASME CL 300	89 (3.5)	146 (5.75)	168.15 (6.62)	209.55 (8.25)	22.35 (0.88)	28.44 (1.12)	17.3 (0.68)	123.8 (4.87)	R31	8
3 in. ASME CL 600	89 (3.5)	146 (5.75)	168.15 (6.62)	209.55 (8.25)	22.35 (0.88)	31.75 (1.25)	17.3 (0.68)	123.8 (4.87)	R31	8
3 in. ASME CL 900	89 (3.5)	155 (6.10)	190.5 (7.5)	241.3 (9.5)	25.4 (1)	38.1 (1.50)	20.8 (0.82)	123.8 (4.87)	R31	8
3 in. ASME CL 1500	89 (3.5)	168 (6.61)	203.2 (8)	266.7 (10.5)	31.75 (1.25)	47.8 (1.88)	20.8 (0.82)	136.5 (5.37)	R35	8

266DDH with barrel housing and direct mount  
 seal S26RR flanged Ring Joint flush diaphragm

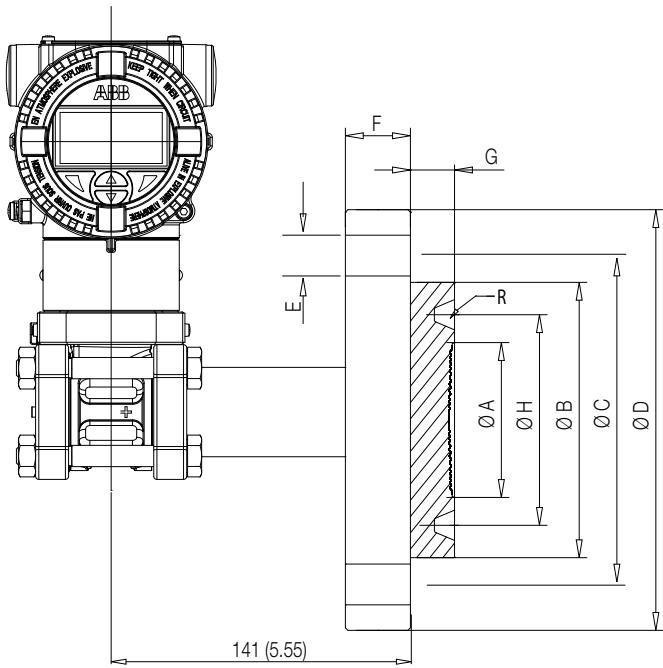

266HDH / 266NDH with barrel housing and direct mount  
 seal S26RR flanged Ring Joint flush diaphragm


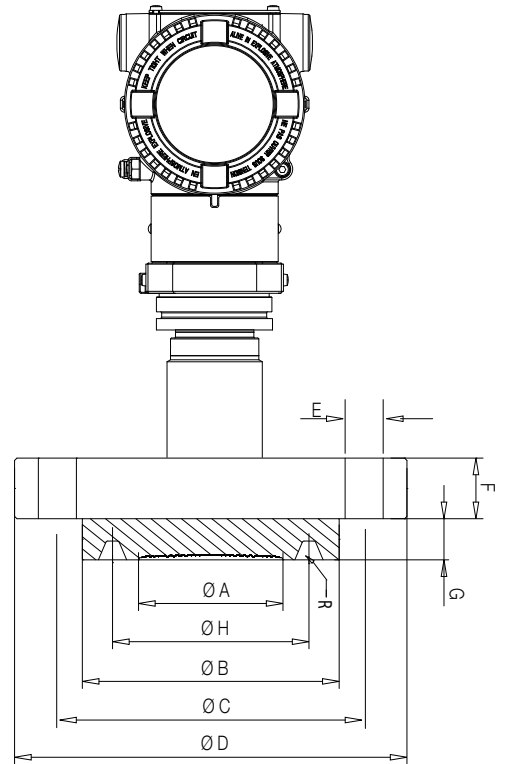


# Model 266DRH Differential


## Model 266HRH Gauge

## Model 266NRH Absolute


### S26FA, S26FE Fixed flange diaphragm seals

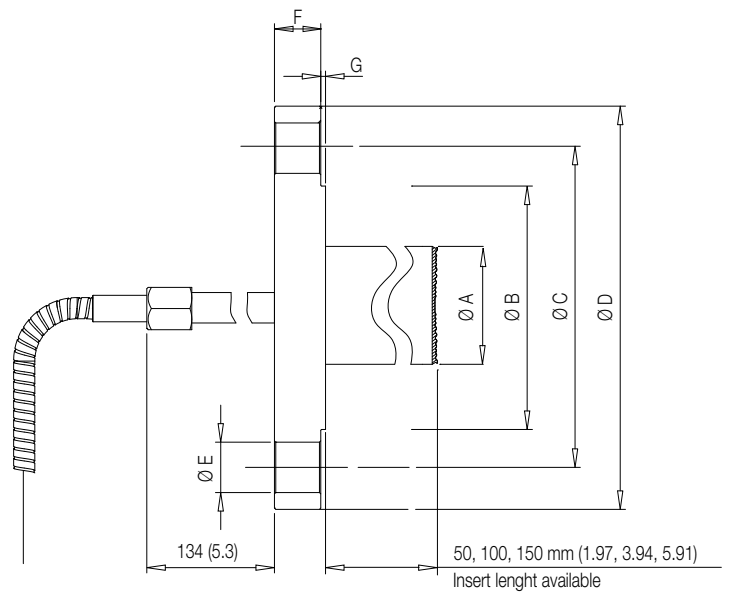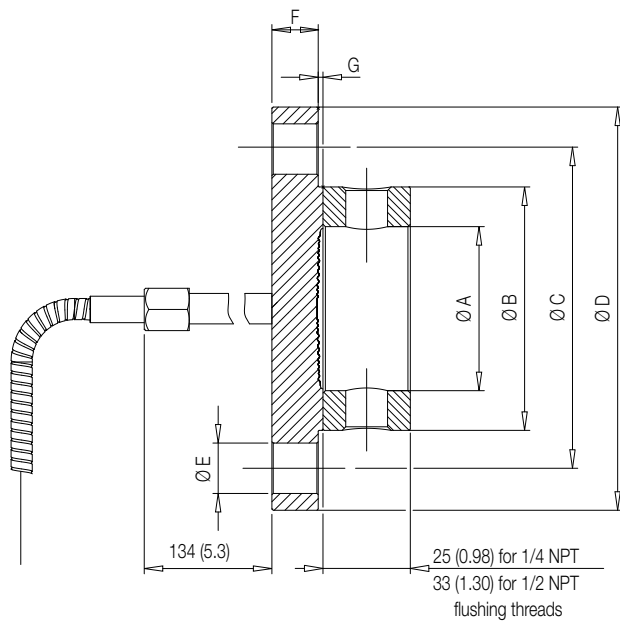

ASME and EN 1092-1 smooth and Form B1 (flushing ring as option, only for flush version)

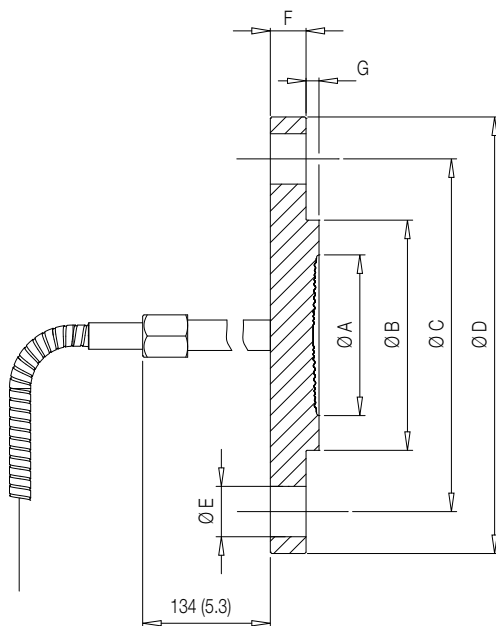

EN 1092-1 Form E

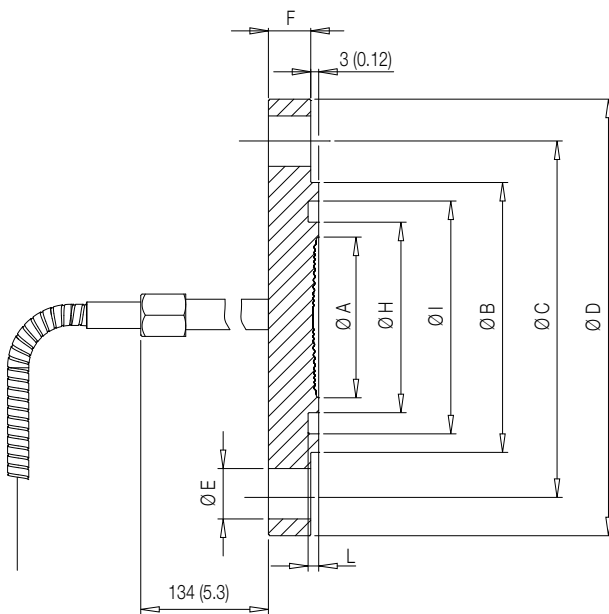


EN 1092-1 Form D

Note 1 - Flange thickness tolerance is +3.0 / -0.0 mm (+0.12 / -0.0 in.).


Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm (+0.04 / -0.05 in.) up to 18 mm or ±1.5 mm (±0.06 in.) from 18 to 50 mm from 18 to 50 mm.



## 266DDH with barrel housing and direct mount seal S26FA/S26FE fixed flange Raised Face flush diaphragm

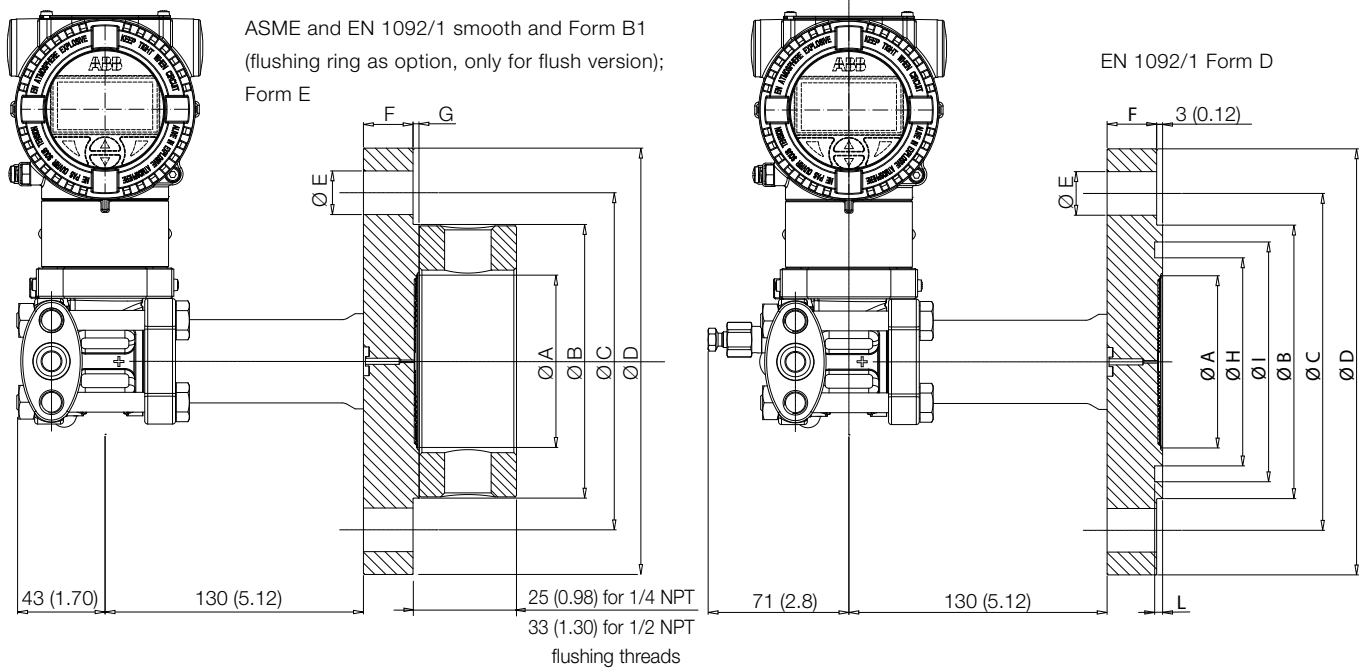

## 266HDH/266NDH with barrel housing and direct mount seal S26FA/S26FE fixed flange Raised Face

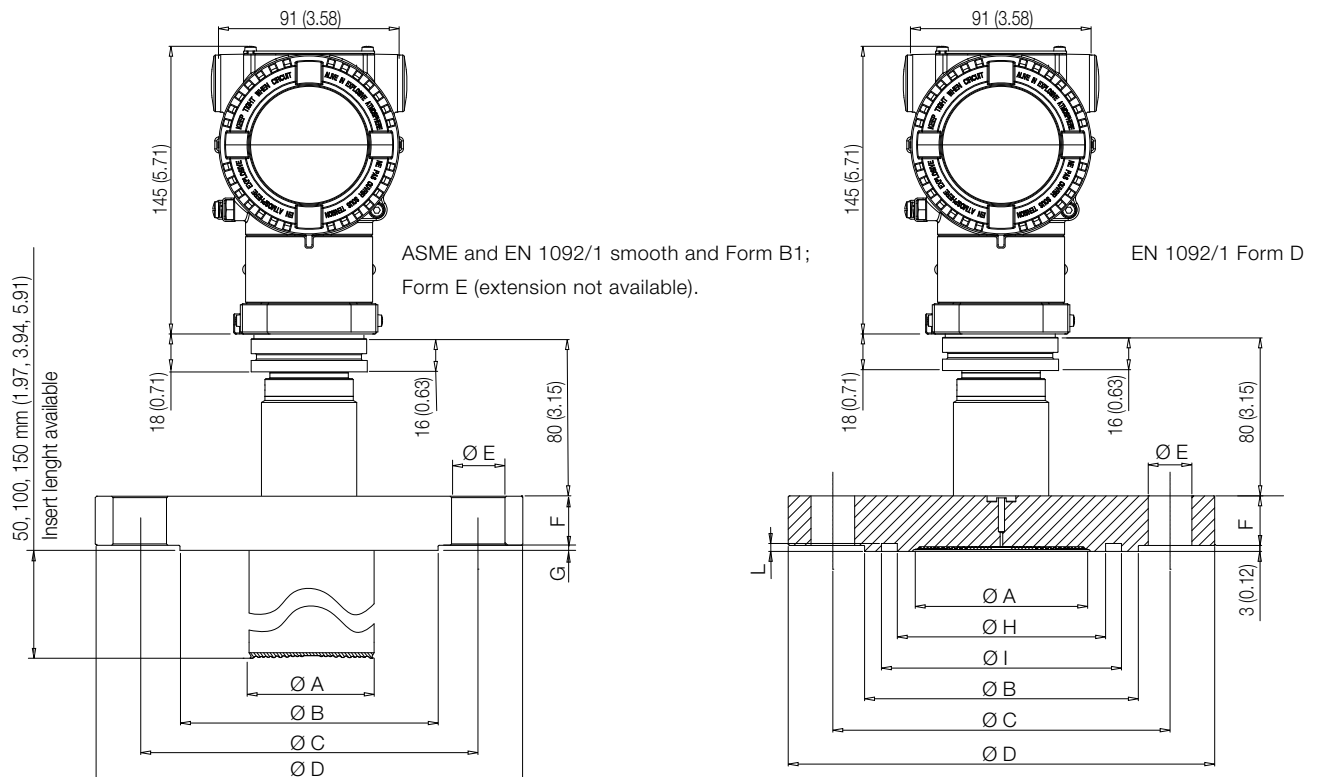

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

Size/Rating	Dimensions mm. (in.) for S26FA										
	A (dia)				B (dia)	C (dia)	D (dia)	E (dia)	F (Note 1)	G	N° of holes
	extended diaphragm	flush diaphragm		flushing ring							
		std.	low thick.	internal dia							
2 in. ASME CL 150	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	120.65 (4.75)	152.4 (6)	19.1 (0.79)	17.5 (0.6)	2 (0.08)	4
2 in. ASME CL 300	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	20.8 (0.8)	2 (0.08)	8
2 in. ASME CL 600	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	92 (3.62)	127 (5)	165.1 (6.5)	19.1 (0.79)	25.4 (1)	7 (0.27)	8
3 in. ASME CL 150	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	152.4 (6)	190.5 (7.5)	19.1 (0.79)	22.4 (0.88)	2 (0.08)	4
3 in. ASME CL 300	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.86)	26.9 (1.1)	2 (0.08)	8
3 in. ASME CL 600	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	127 (5)	168.15 (6.62)	209.6 (8.25)	22.4 (0.86)	31.8 (1.3)	7 (0.27)	8
4 in. ASME CL 150	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	157.2 (6.2)	190.5 (7.5)	228.6 (9)	19.1 (0.79)	22.4 (0.88)	2 (0.08)	8

Size/Rating	Dimensions mm. (in.) for S26FE smooth and Form B1										
	A (dia)				B (dia)	C (dia)	D (dia)	E (dia)	F (Note 2)	G	N° of holes
	extended diaphragm	flush diaphragm		flushing ring							
		std.	low thick.	internal dia							
DN 50 EN PN 16	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	15 (0.58)	3 (0.12)	4
DN 50 EN PN 40	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	18 (0.67)	3 (0.12)	4
DN 50 EN PN 63	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	135 (5.31)	180 (7.08)	22 (0.86)	23 (0.9)	3 (0.12)	4
DN 50 EN PN 100	48 (1.9)	60 (2.36)	58 (2.28)	62 (2.44)	102 (4.02)	145 (5.71)	195 (7.67)	26 (1.02)	27 (1.06)	3 (0.12)	4
DN 80 EN PN 16	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	17 (0.67)	3 (0.12)	8
DN 80 EN PN 40	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	21 (0.83)	3 (0.12)	8
DN 80 EN PN 63	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	170 (6.7)	215 (8.46)	22 (0.86)	25 (0.98)	3 (0.12)	8
DN 80 EN PN 100	72 (2.83)	89 (3.5)	75 (2.95)	92 (3.62)	138 (5.43)	180 (7.08)	230 (9.05)	26 (1.02)	33 (1.3)	3 (0.12)	8
DN 100 EN PN 16	94 (3.7)	89 (3.5)	75 (2.95)	92 (3.62)	158 (6.22)	180 (7.08)	220 (8.66)	18 (0.71)	17 (0.67)	3 (0.12)	8

Note 1 - Flange thickness tolerance is +3.0 / -0.0 mm. (+0.12 / 0.0 in.).

Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm. (+0.04 / 0.05 in.) up to 18 mm. or ±1.5 mm. (±0.06 in.) from 18 to 50 mm.

Size/Rating	Dimensions mm. (in.) for S26FE Form E								
	diaphragm A (dia)		B (dia)	C (dia)	D (dia)	E (dia)	F (Note 2)	G	N° of holes
	std. thickness	low thickness							
DN 50 EN PN 16	60 (2.36)	58 (2.28)	87 (3.42)	125 (4.92)	165 (6.5)	18 (0.71)	13.5 (0.53)	4.5 (0.18)	4
DN 50 EN PN 40	60 (2.36)	58 (2.28)	87 (3.42)	125 (4.92)	165 (6.5)	18 (0.71)	15.5 (0.61)	4.5 (0.18)	4
DN 50 EN PN 63	60 (2.36)	58 (2.28)	87 (3.42)	135 (5.31)	180 (7.08)	22 (0.86)	21.5 (0.85)	4.5 (0.18)	4
DN 50 EN PN 100	60 (2.36)	58 (2.28)	87 (3.42)	145 (5.71)	195 (7.67)	26 (1.02)	25.5 (1)	4.5 (0.18)	4
DN 80 EN PN 16	89 (3.5)	75 (2.95)	120 (4.72)	160 (6.3)	200 (7.87)	18 (0.71)	15.5 (0.61)	4.5 (0.18)	8
DN 80 EN PN 40	89 (3.5)	75 (2.95)	120 (4.72)	160 (6.3)	200 (7.87)	18 (0.71)	19.5 (0.77)	4.5 (0.18)	8
DN 80 EN PN 63	89 (3.5)	75 (2.95)	120 (4.72)	170 (6.7)	215 (8.46)	22 (0.86)	23.5 (0.92)	4.5 (0.18)	8
DN 80 EN PN 100	89 (3.5)	75 (2.95)	120 (4.72)	180 (7.08)	230 (9.05)	26 (1.02)	31.5 (1.24)	4.5 (0.18)	8

Size/Rating	Dimensions mm. (in.) for S26FE Form D										
	diaphragm A (dia)		B (dia)	C (dia)	D (dia)	E (dia)	F (Note 2)	H (dia)	I (dia)	L	N° of holes
	std. thickness	low thickness									
DN 50 EN PN 16	60 (2.36)	58 (2.28)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	15 (0.59)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 50 EN PN 40	60 (2.36)	58 (2.28)	102 (4.02)	125 (4.92)	165 (6.5)	18 (0.71)	18 (0.71)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 50 EN PN 63	60 (2.36)	58 (2.28)	102 (4.02)	135 (5.31)	180 (7.08)	22 (0.86)	23 (0.91)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 50 EN PN 100	60 (2.36)	58 (2.28)	102 (4.02)	145 (5.71)	195 (7.67)	26 (1.02)	27 (1.06)	72 (2.83)	88 (3.46)	4 (0.16)	4
DN 80 EN PN 16	89 (3.5)	75 (2.95)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	17 (0.67)	105 (4.13)	121 (4.76)	4 (0.16)	8
DN 80 EN PN 40	89 (3.5)	75 (2.95)	138 (5.43)	160 (6.3)	200 (7.87)	18 (0.71)	21 (0.83)	105 (4.13)	121 (4.76)	4 (0.16)	8
DN 80 EN PN 63	89 (3.5)	75 (2.95)	138 (5.43)	170 (6.7)	215 (8.46)	22 (0.86)	25 (0.92)	105 (4.13)	121 (4.76)	4 (0.16)	8
DN 80 EN PN 100	89 (3.5)	75 (2.95)	138 (5.43)	180 (7.08)	230 (9.05)	26 (1.02)	33 (1.3)	105 (4.13)	121 (4.76)	4 (0.16)	8


Note 2 - Flange thickness tolerance is +1.0 / -1.3 mm. (+0.04 / 0.05 in.) up to 18 mm. or ±1.5 mm. (±0.06 in.) from 18 to 50 mm.

# Model 266DRH Differential


## Model 266HRH Gauge

## Model 266NRH Absolute


**S26MA, S26ME Model off-line flanged diaphragm seal**

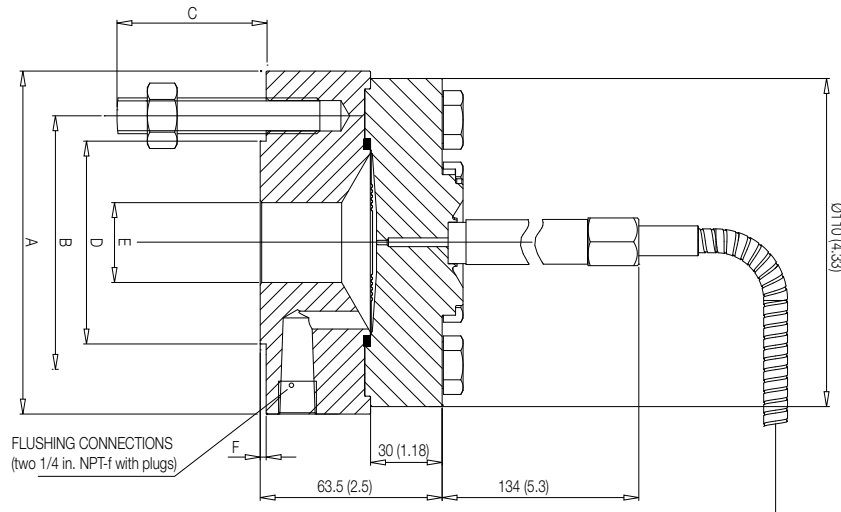

**266DDH with barrel housing and direct mount seal S26Mx off-line flanged**

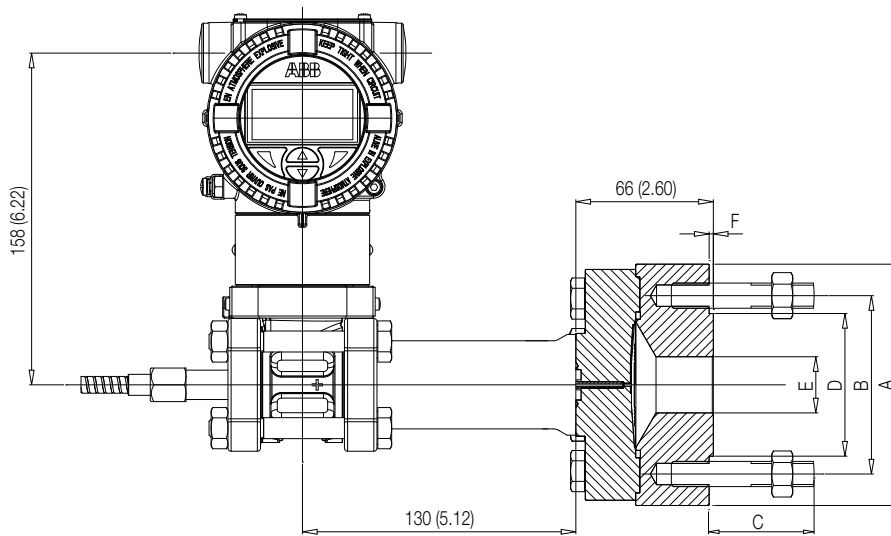


**266HDD / 266NDH with barrel housing and direct mount seal S26Mx off-line flanged**

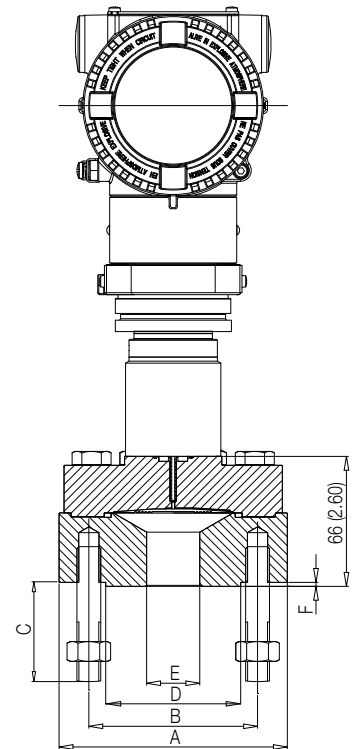

**Dimensions mm. (in.) for S26MA and S26ME**


Size/Rating	A (dia)	B (dia)	C (4 studs)		D (dia)	E (dia)	F
			Length	Thread			
1/2 in. ASME CL 150	110 (4.33)	60.5 (2.38)	39 (1.53)	1/2 in. – 13 UNC	35.1 (1.38)	15.8 (0.62)	1.6 (0.06)
1/2 in. ASME CL 300	110 (4.33)	66.5 (2.62)	39 (1.53)	1/2 in. – 13 UNC	35.1 (1.38)	15.8 (0.62)	1.6 (0.06)
1 in. ASME CL 150	110 (4.33)	79.4 (3.12)	39 (1.53)	1/2 in. – 13 UNC	50.8 (2)	26.7 (1.05)	1.6 (0.06)
1 in. ASME CL 300	124 (4.88)	88.9 (3.5)	51 (2)	5/8 in. – 11 UNC	50.8 (2)	26.7 (1.05)	1.6 (0.06)
1 1/2 in. ASME CL 150	127 (5)	98.4 (3.87)	39 (1.53)	1/2 in. – 13 UNC	73 (2.87)	41 (1.61)	1.6 (0.06)
1 1/2 in. ASME CL 300	155 (6.1)	114.3 (4.5)	57 (2.24)	3/4 in. – 10 UNC	73 (2.87)	41 (1.61)	1.6 (0.06)
DN 25 PN 16-40	115 (4.52)	85 (3.34)	42 (1.65)	M12	68 (2.67)	28.5 (1.12)	2 (0.08)
DN 40 PN 16-40	150 (5.9)	110 (4.33)	48 (1.89)	M16	88 (3.46)	43.1 (1.69)	3 (0.12)

S26TT Model off-line threaded diaphragm seal

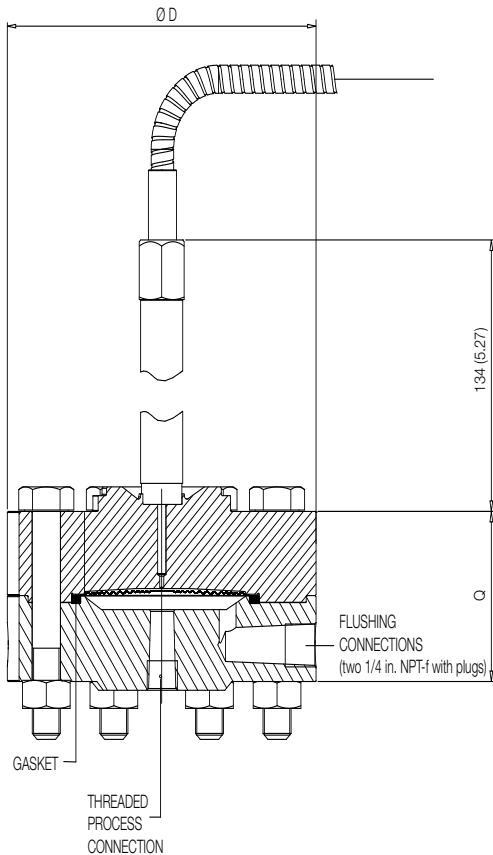


Size (thread)	Dimensions mm. (in.) for S26TT	
	D (dia)	Q
1/4 in. NPT	109.2 (4.3)	53.3 (2.1)
1/2 in. NPT	109.2 (4.3)	53.3 (2.1)
3/4 in. NPT	109.2 (4.3)	63.5 (2.5)
1 in. NPT	109.2 (4.3)	63.5 (2.5)
1 1/2 in. NPT	109.2 (4.3)	63.5 (2.5)

266DDH with barrel housing and direct mount seal S26TT off-line threaded flange

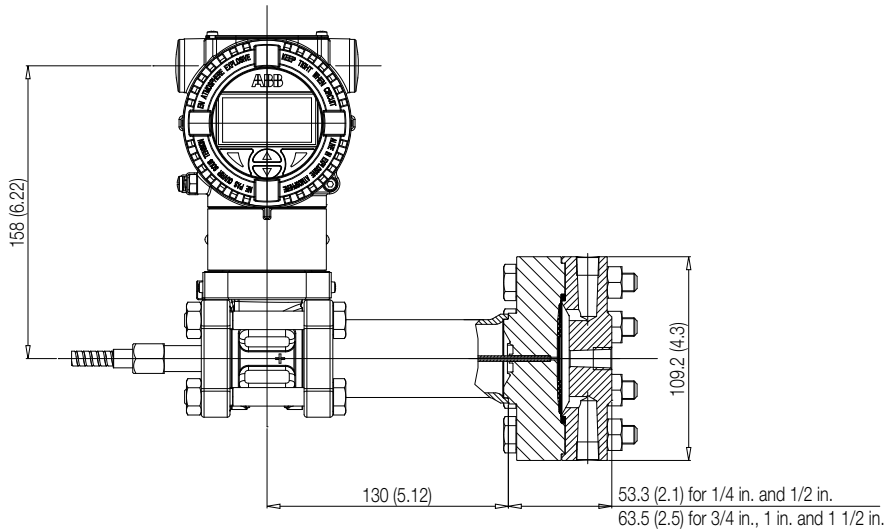


266HDDH / 266NDH with barrel housing and direct mount seal S26TT off-line threaded flange

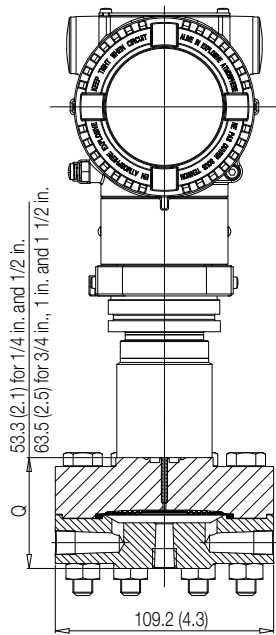


Model 266DRH Differential
Model 266HRH Gauge
Model 266NRH Absolute


S26SS Union Nut seal

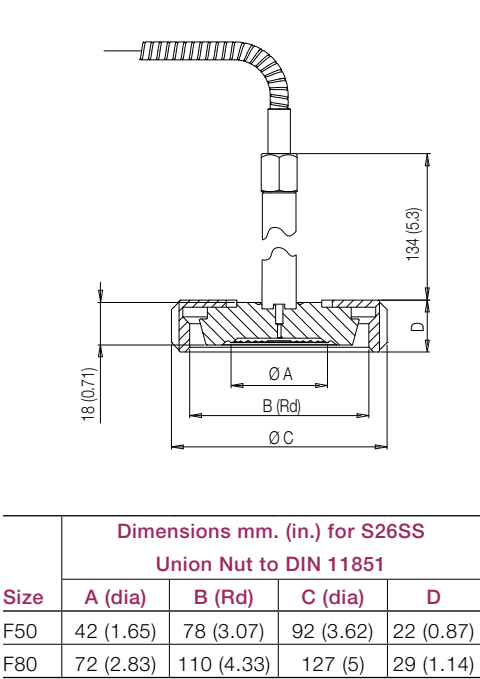


266DDH with barrel housing and direct mount seal S26SS Union Nut

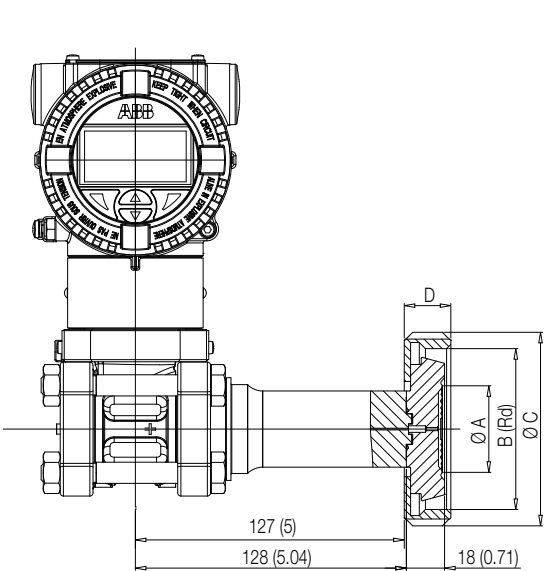

266HDH / 266NDH with barrel housing and direct mount seal S26SS Union Nut

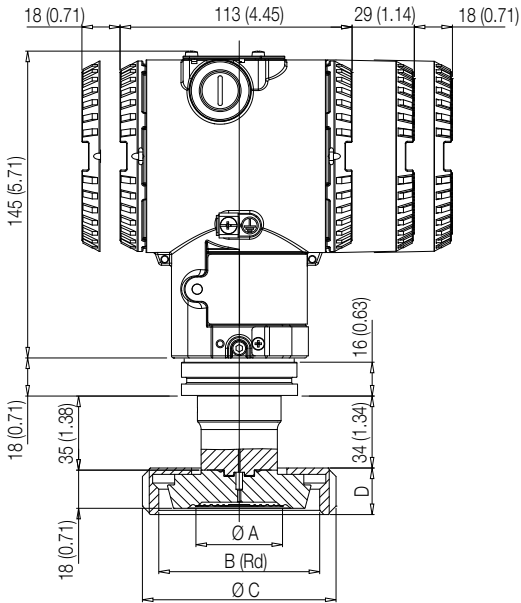


S26SS Triclamp seal

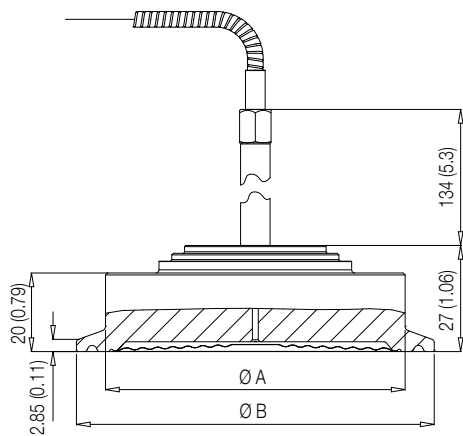


Dimensions mm. (in.) for S26SS Triclamp		
Size	A (dia)	B (dia)
2 in.	56.3 (2.2)	64 (2.5)
3 in.	83 (3.26)	91 (3.58)
4 in.	110.3 (4.34)	119 (4.68)

266DDH with barrel housing and direct mount seal S26SS Triclamp

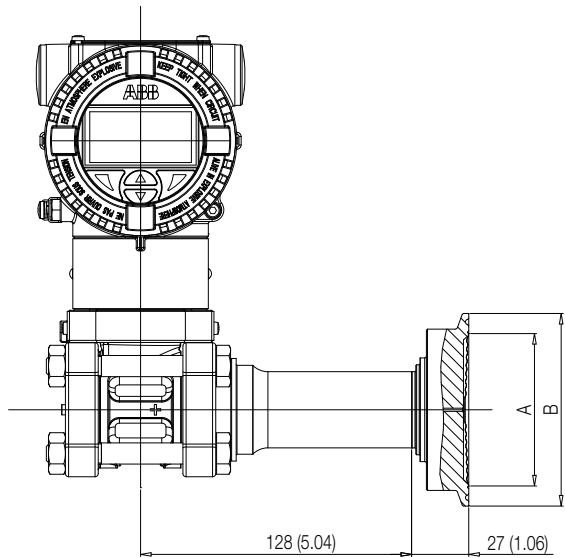


266HDH / 266NDH with barrel housing and direct mount seal S26SS Triclamp

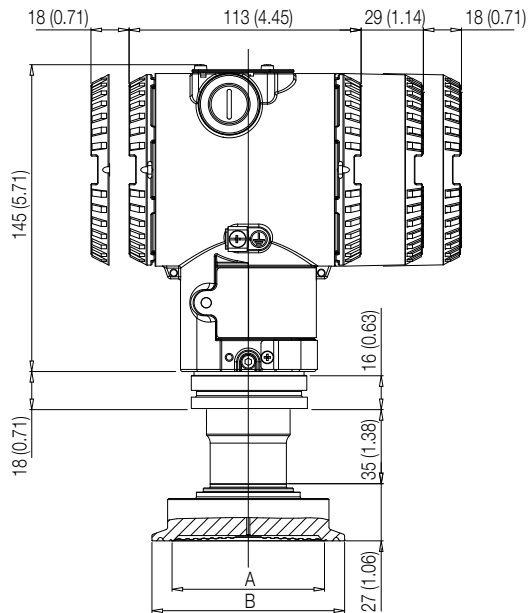


Model 266DRH Differential
Model 266HRH Gauge
Model 266NRH Absolute


S26SS Cherry Burrell seal

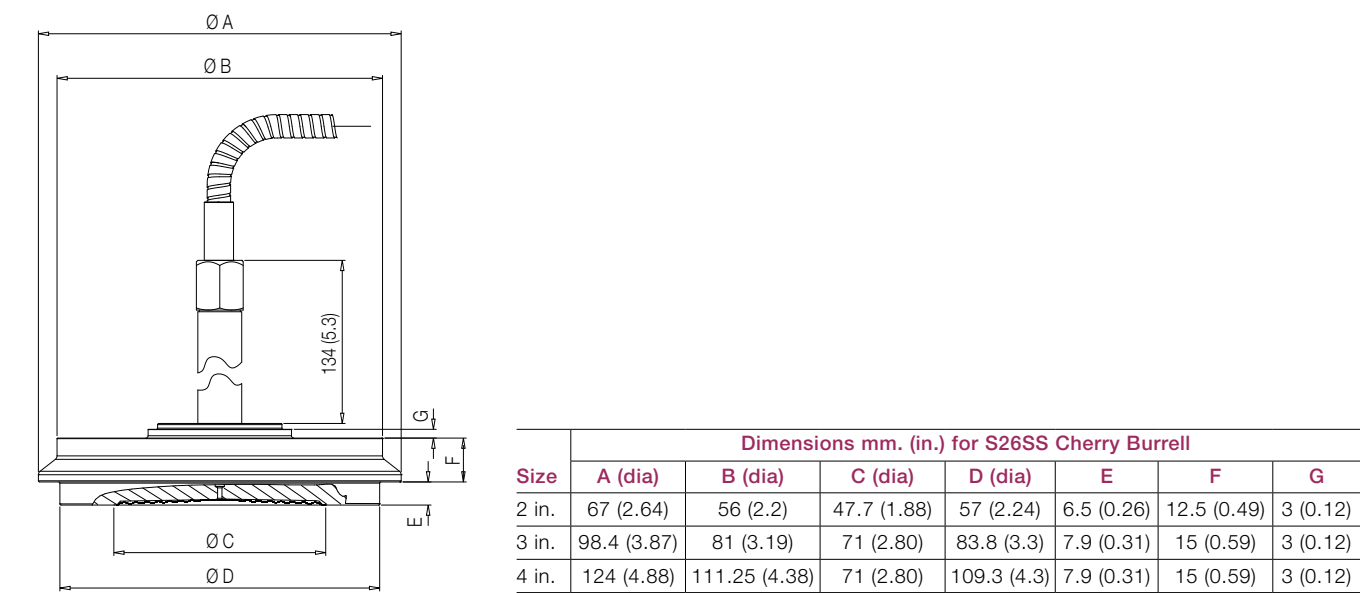

266DDH with barrel housing and direct mount seal S26SS Cherry Burrell

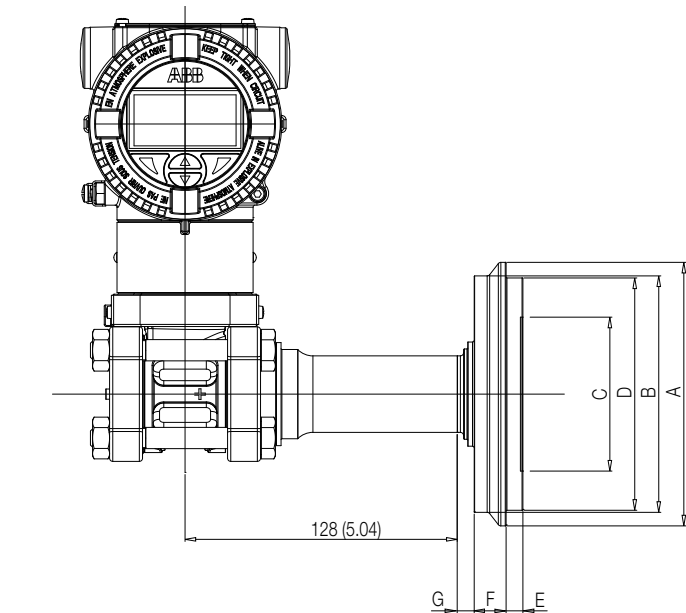


266HDH / 266NDH with barrel housing and direct mount seal S26SS Cherry Burrell

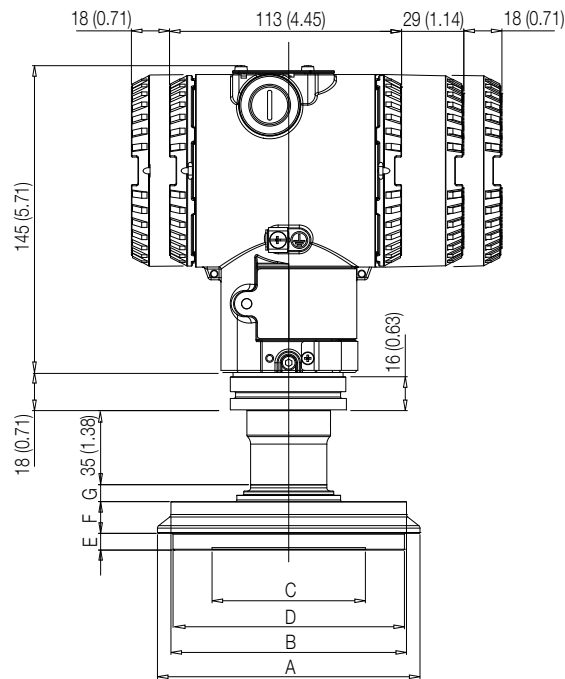





## S26SS Sanitary flush seal

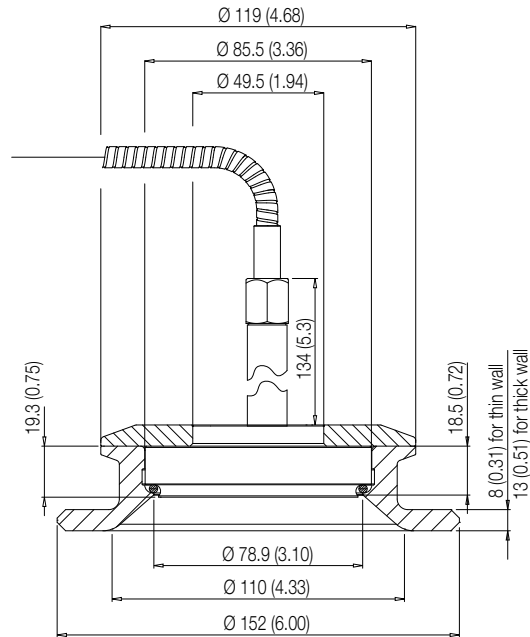

## 266DDH with barrel housing and direct mount seal S26SS Sanitary flush

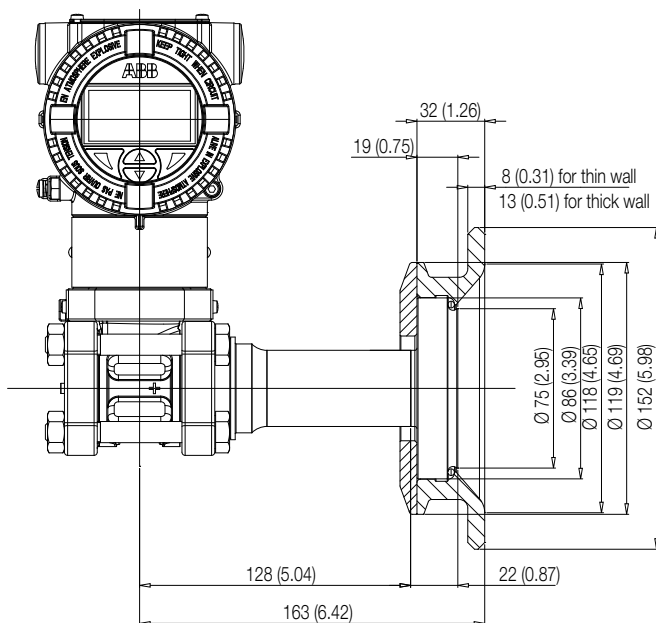


## 266HDD / 266NDH with barrel housing and direct mount seal S26SS Sanitary flush

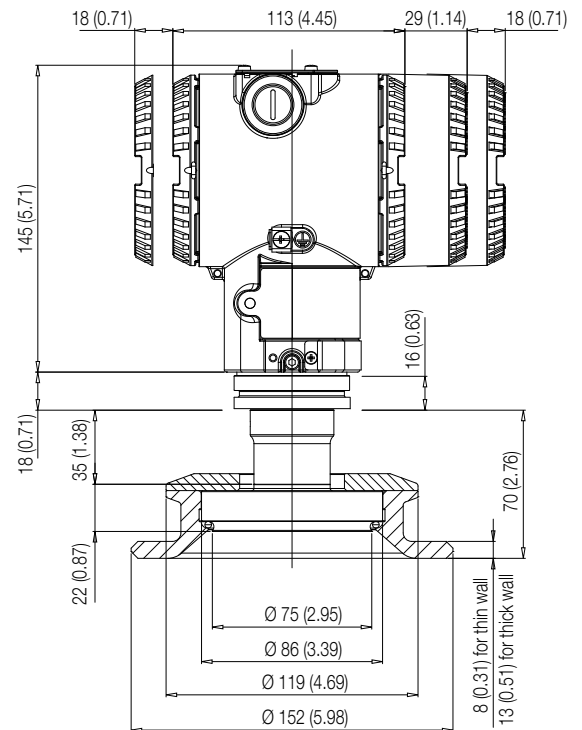

Model 266DRH Differential  
Model 266HRH Gauge  
Model 266NRH Absolute


## S26SS Sanitary extended seal

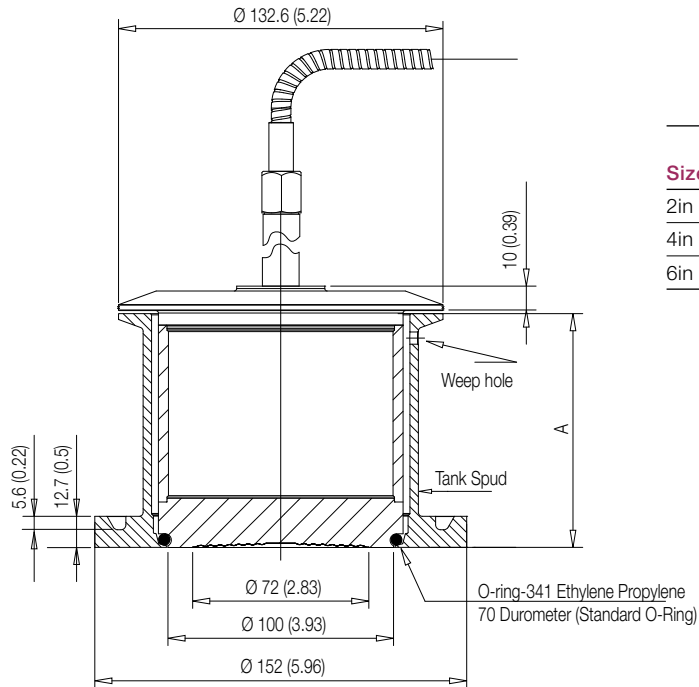


	Dimensions mm. (in.) for S26SS Sanitary extended
Size	A
2in	53.3 (2.1)
4in	104.1 (4.1)
6in	154.9 (6.1)

NOTE: The tank spud required for connection of this seal element must be welded to the process vessel prior to connecting the seal, following a recommended welding and pressure testing procedure.

266DDH with barrel housing and direct mount seal S26SS Sanitary extended

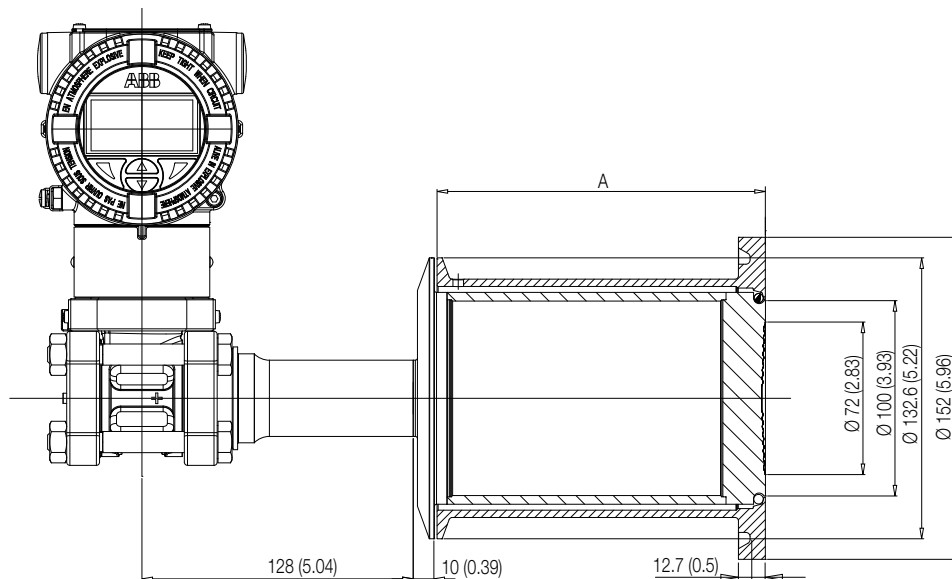


266HDH / 266NDH with barrel housing and direct mount seal S26SS Sanitary extended

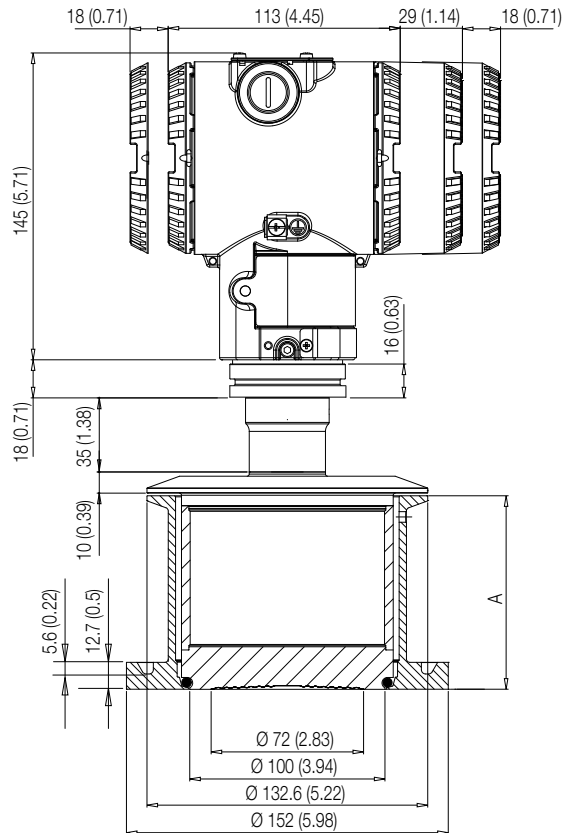


Size	Dimensions mm. (in.) for S26SS Sanitary extended
	A
2in	53.3 (2.1)
4in	104.1 (4.1)
6in	154.9 (6.1)

266HDH / 266NDH with barrel housing and direct mount seal S26SS beverage bolted

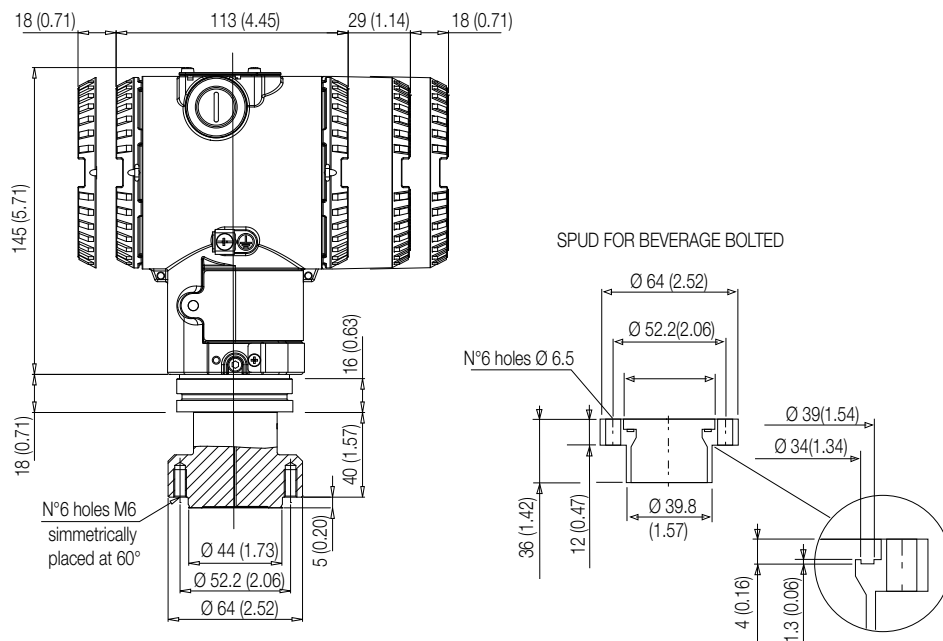


Model 266DRH Differential  
Model 266HRH Gauge  
Model 266NRH Absolute

S26SS Sanitary aseptic seal

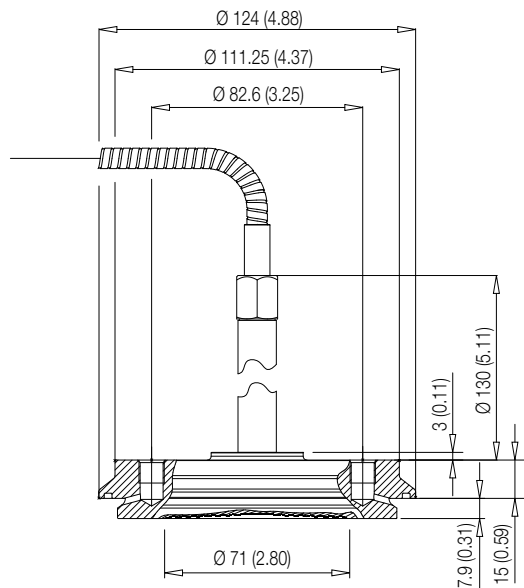


4 in. Cherry Burrell Aseptic

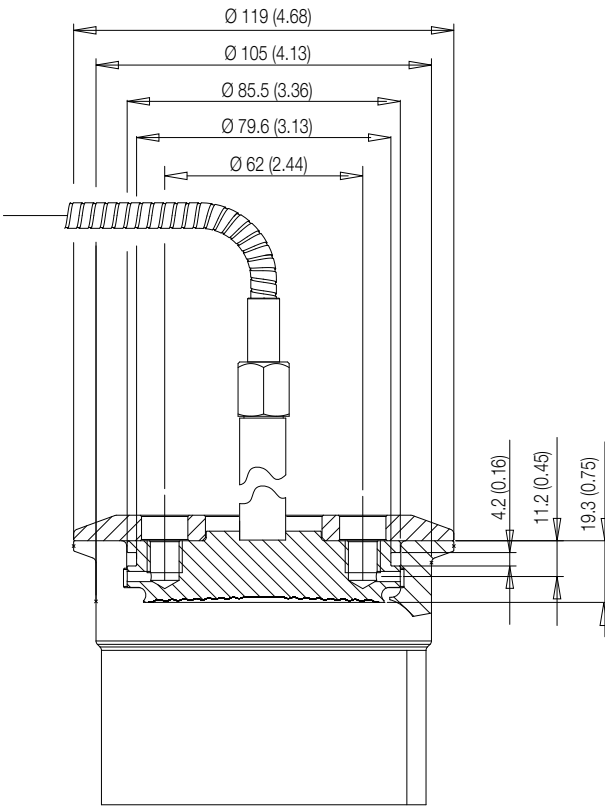

4 in. Aseptic Flanged Connection

## S26VN saddle and socket seal


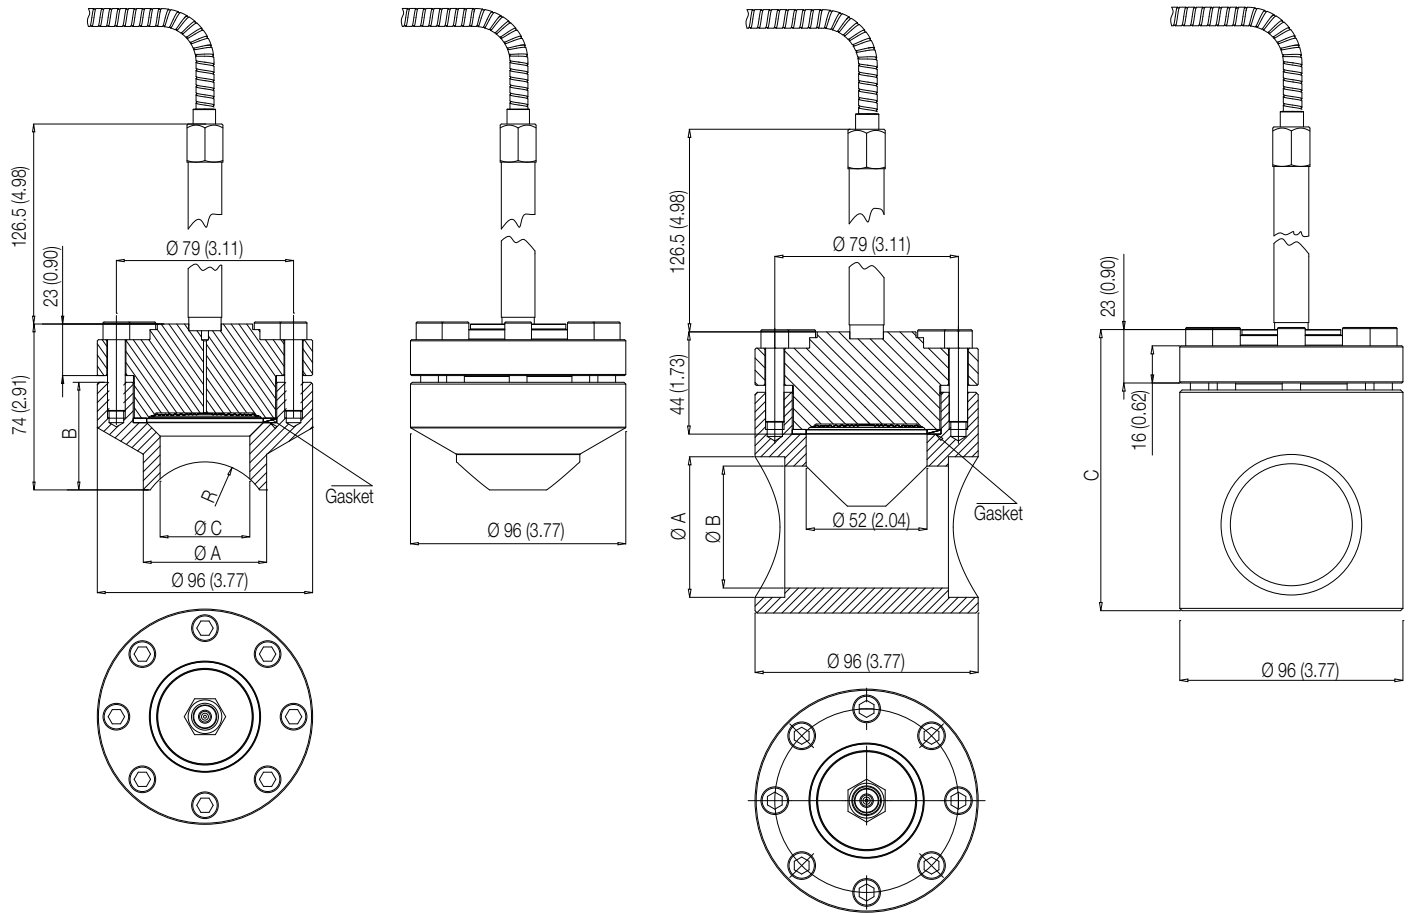


Fitting connection	Dimensions mm. (in.) for S26VN- saddle type			
Size	A (dia)	B	C (dia)	R
Saddle 2 in.	55 (2.17)	48 (1.89)	40 (1.57)	30
Saddle 2 1/2 in.	76 (3.0)	45 (1.77)	52 (2.05)	45
Saddle 3 in.	76 (3.0)	45 (1.77)	50 (1.97)	45
Saddle 4 in.	76 (3.0)	41 (1.61)	50 (1.97)	57
Saddle 5 in.	76 (3.0)	40 (1.57)	50 (1.97)	70
Saddle 6 in.	76 (3.0)	36 (1.42)	50 (1.97)	85



Fitting connection	Dimensions mm. (in.) for S26VN- socket type		
Size	A (dia)	B	C
Socket 1/2 in.	21.8 (0.86)	15.9 (0.63)	86 (3.39)
Socket 3/4 in.	27 (1.06)	21.2 (0.83)	96 (3.78)
Socket 1 in.	33.6 (1.32)	26.8 (1.06)	101 (3.98)
Socket 1 1/2 in.	48.5 (1.91)	41 (1.61)	121 (4.76)
Socket 2 in.	60.5 (2.38)	52.5 (2.07)	121 (4.76)

Model 266DRH Differential  
Model 266HRH Gauge  
Model 266NRH Absolute

266HDH / 266NDH with barrel housing and direct mount seal S26VN saddle and socket

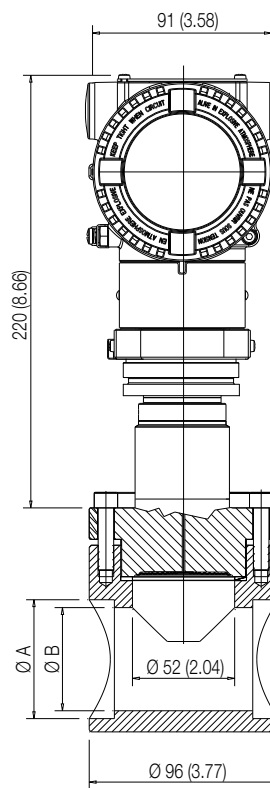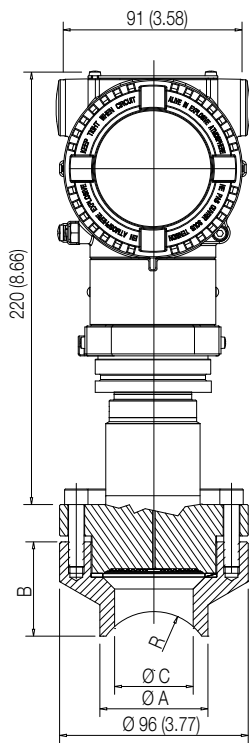

266HDH / 266NDH with barrel housing and direct mount seal S26JN in-line

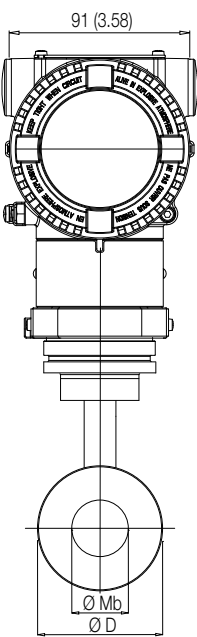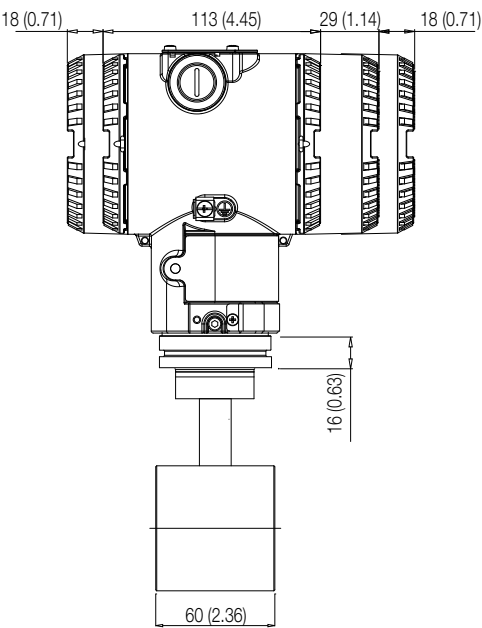



Dimensions mm. (in.) for S26JN		
Size/Rating	D (dia)	Mb (dia)
1 in. / DN 25	63 (2.48)	28.5 (1.12)
1 1/2 in. / DN 40	85 (3.35)	43 (1.69)
2 in. / DN 50	95 (3.74)	54.5 (2.15)
3 in. / DN 80	130 (5.12)	82.5 (3.25)

# Model 266DRH Differential



## Model 266HRH Gauge

## Model 266NRH Absolute

### 266HDX / 266NDH with barrel housing and direct mount seal S26KN pulp and paper NPT threaded connections

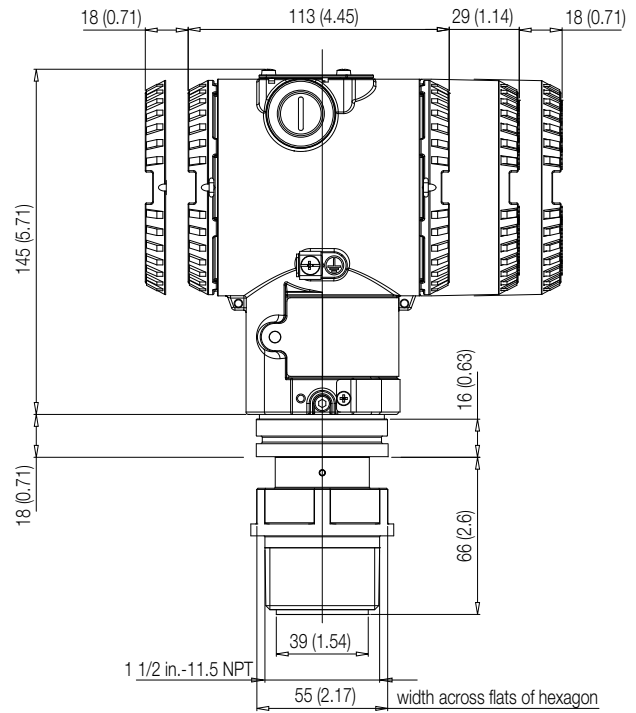
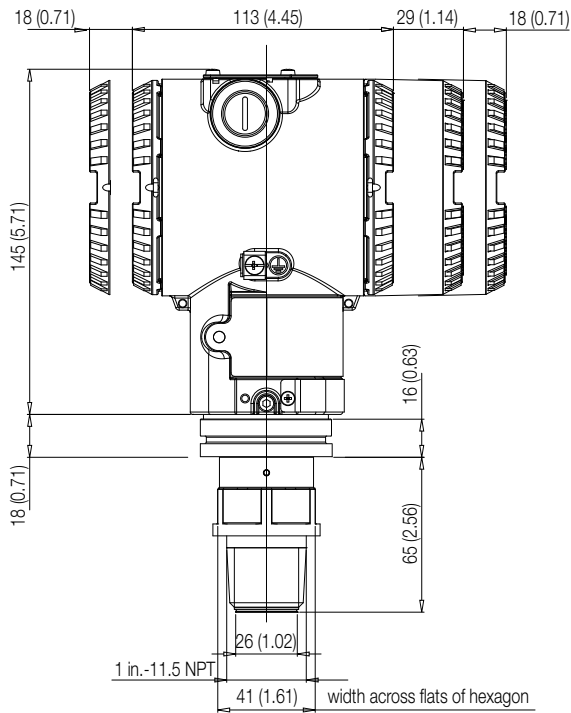


### 266HDX / 266NDH with barrel housing and direct mount seal S26KN pulp and paper Gas threaded connections

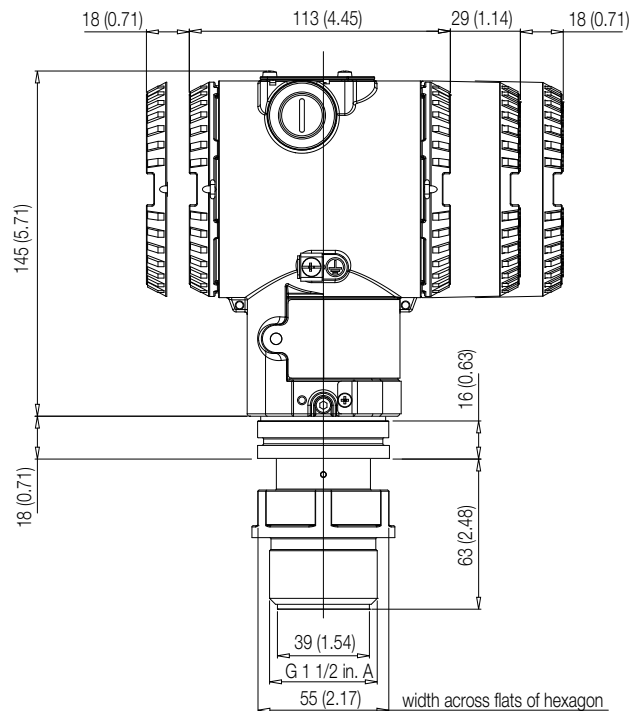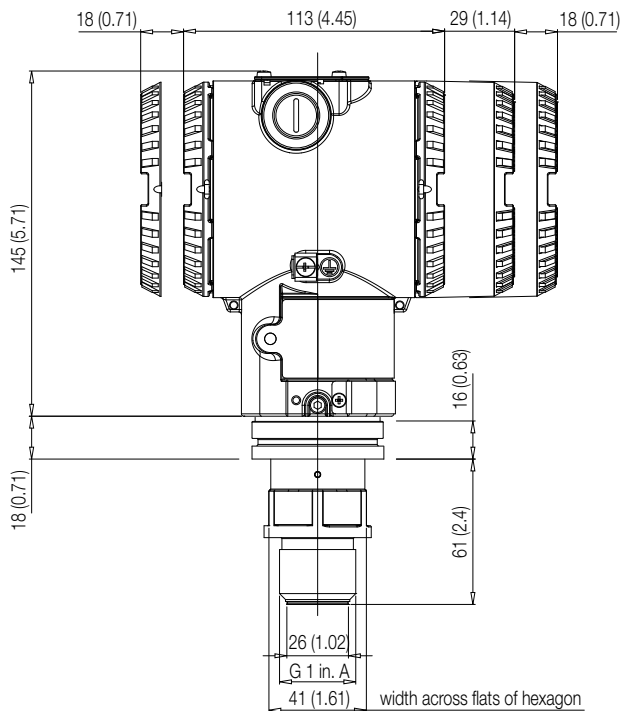





**266HDH / 266NDH with barrel housing and direct mount seal S26KN pulp and paper sealing with gasket**

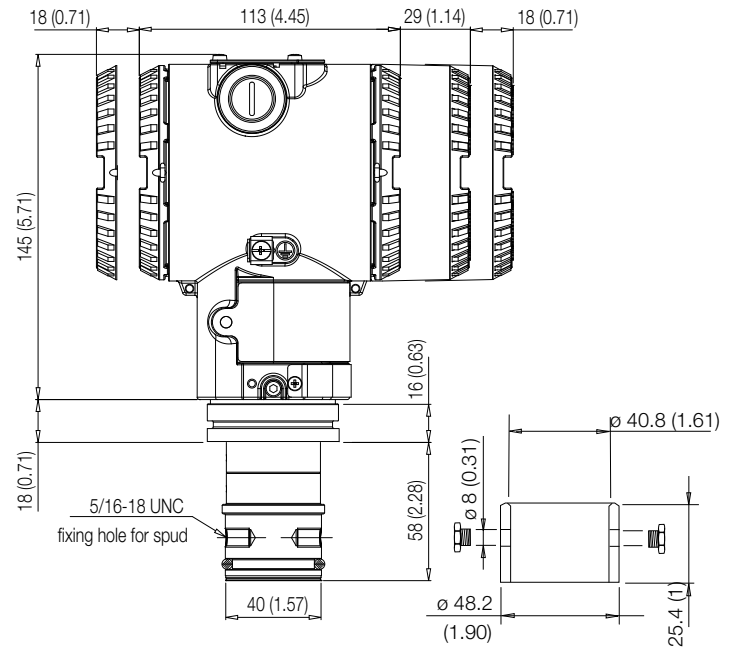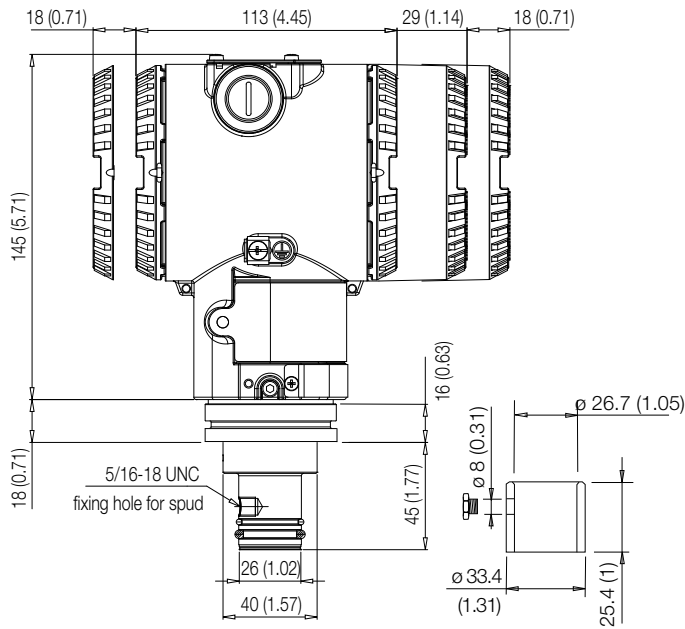

**266HDH / 266NDH with barrel housing and direct mount seal S26KN pulp and paper ball valve connection**

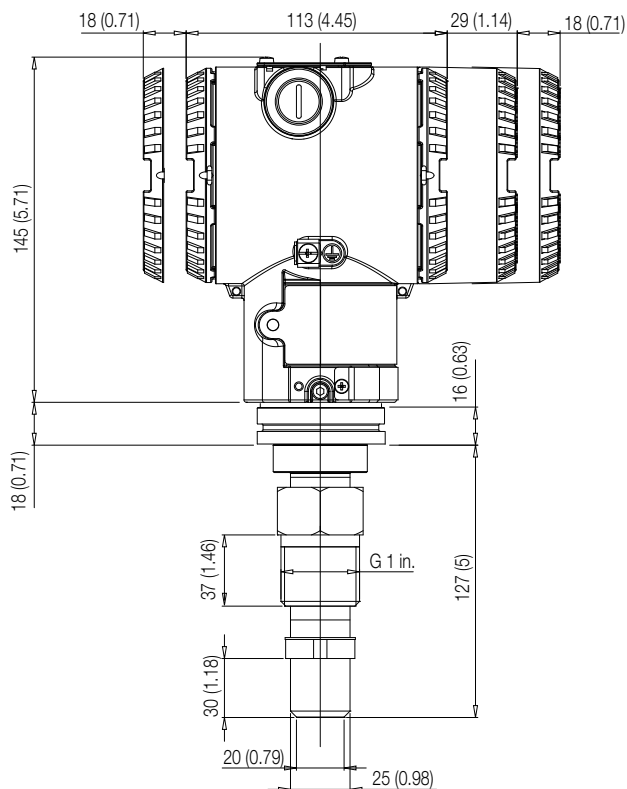

**266HDH / 266NDH with barrel housing and direct mount seal S26KN pulp and paper to threaded spud**

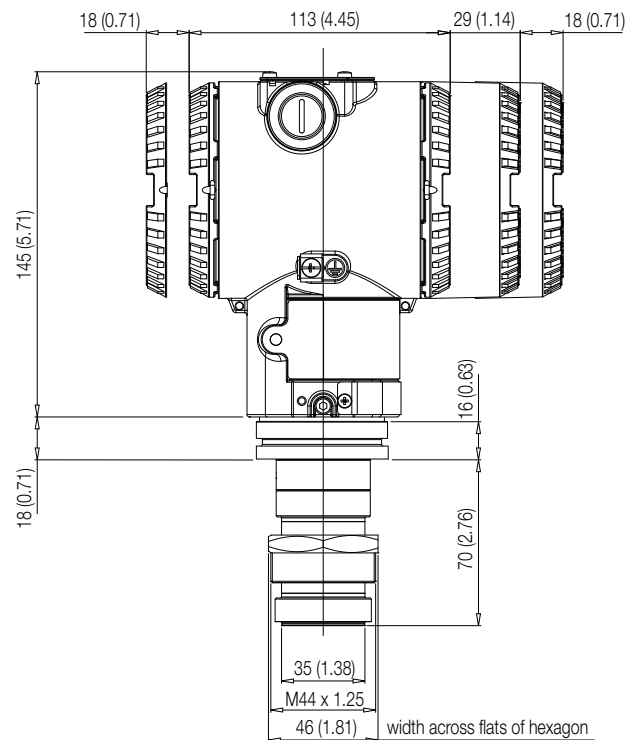

# Model 266DRH Differential


## Model 266HRH Gauge

## Model 266NRH Absolute


### S26WA, S26WE Model Wafer remote diaphragm seal

The wafer remote seal is designed to be clamped between two ASME or EN raised face flanges.


The diaphragm side of the seal faces the process flange and a blind back-up flange is used on the other side of the seal.

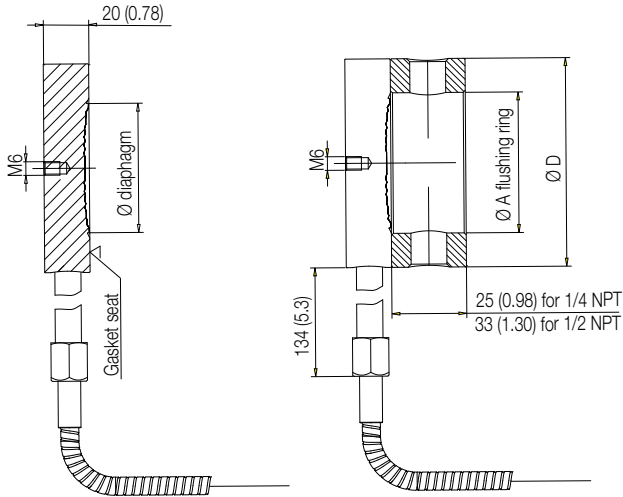

ASME and EN 1092-1 Form B1 smooth and serrated  
(flushing ring as option)

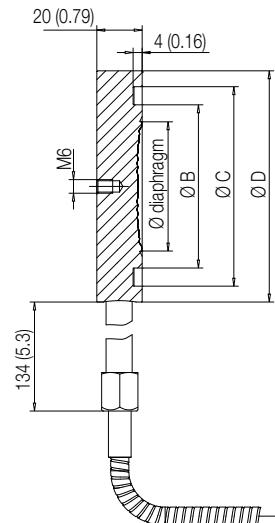


EN 1092-1 Form D

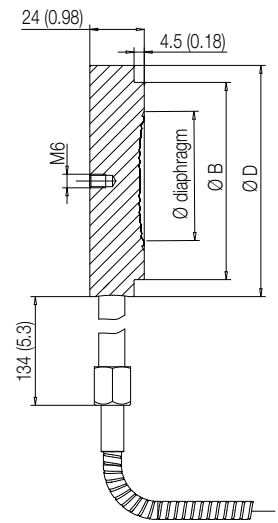

EN 1092-1 Form E

Size/Rating	Dimensions mm. (in.) for S26W					
	diaphragm (dia)		A flushing ring internal dia	B (dia)	C (dia)	D (dia)
	std. thickness	low thickness				
1 1/2 in. ASME B16.5	47 (1.85)	47 (1.85)	52 (2.05)	NA	NA	73 (2.87)
2 in. ASME B16.5	60 (2.36)	58 (2.28)	62 (2.44)	NA	NA	92 (3.62)
3 in. ASME B16.5	89 (3.5)	75 (2.95)	92 (3.62)	NA	NA	127 (5)
DN 40 EN 1092-1 Form B1	47 (1.85)	47 (1.85)	52 (2.05)	NA	NA	88 (3.46)
DN 50 EN 1092-1 Form B1	60 (2.36)	58 (2.28)	62 (2.44)	NA	NA	102 (4.02)
DN 80 EN 1092-1 Form B1	89 (3.5)	75 (2.95)	92 (3.62)	NA	NA	138 (5.43)
DN 40 EN 1092-1 Form D	47 (1.85)	47 (1.85)	NA	60 (2.36)	76 (2.99)	88 (3.46)
DN 50 EN 1092-1 Form D	60 (2.36)	58 (2.28)	NA	72 (2.83)	88 (3.46)	102 (4.02)
DN 80 EN 1092-1 Form D	89 (3.5)	75 (2.95)	NA	105 (4.13)	121 (4.76)	138 (5.43)
DN 40 EN 1092-1 Form E	47 (1.85)	47 (1.85)	NA	75 (2.95)	NA	88 (3.46)
DN 50 EN 1092-1 Form E	60 (2.36)	58 (2.28)	NA	87 (3.42)	NA	102 (4.02)
DN 80 EN 1092-1 Form E	89 (3.5)	75 (2.95)	NA	120 (4.72)	NA	138 (5.43)

The chemical tee remote seal is designed to connect to a Wedge Flow Element or to any process fitting with appropriate mating condition. Chemical tee elements cannot be connected to a standard ASME pipe flange.






# Model 266DRH Differential



## Model 266HRH Gauge

## Model 266NRH Absolute

### S26BN Model Button type remote diaphragm seal

These remote seals are designed to connect directly to a process pipe via the NPT threaded connection or to match pipe fitting with an interface suitable for the provided mating flange. The button seals, due to their design, are dedicated for measurement with medium/high calibrated span (2 MPa/20 bar/290 psi approx. or greater).

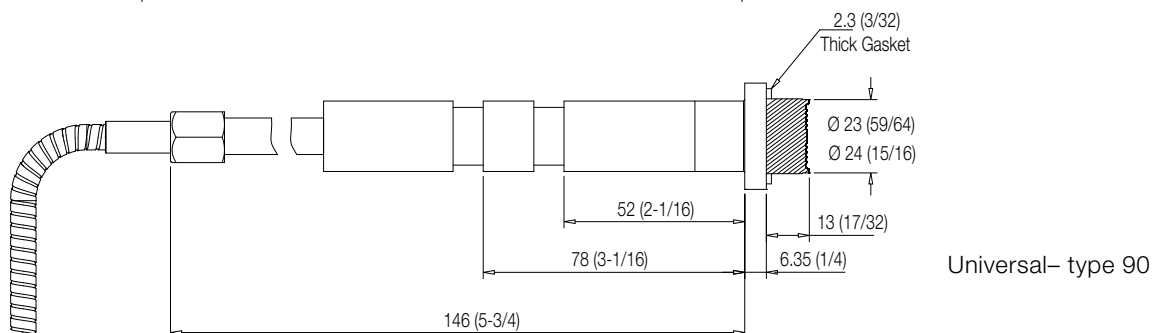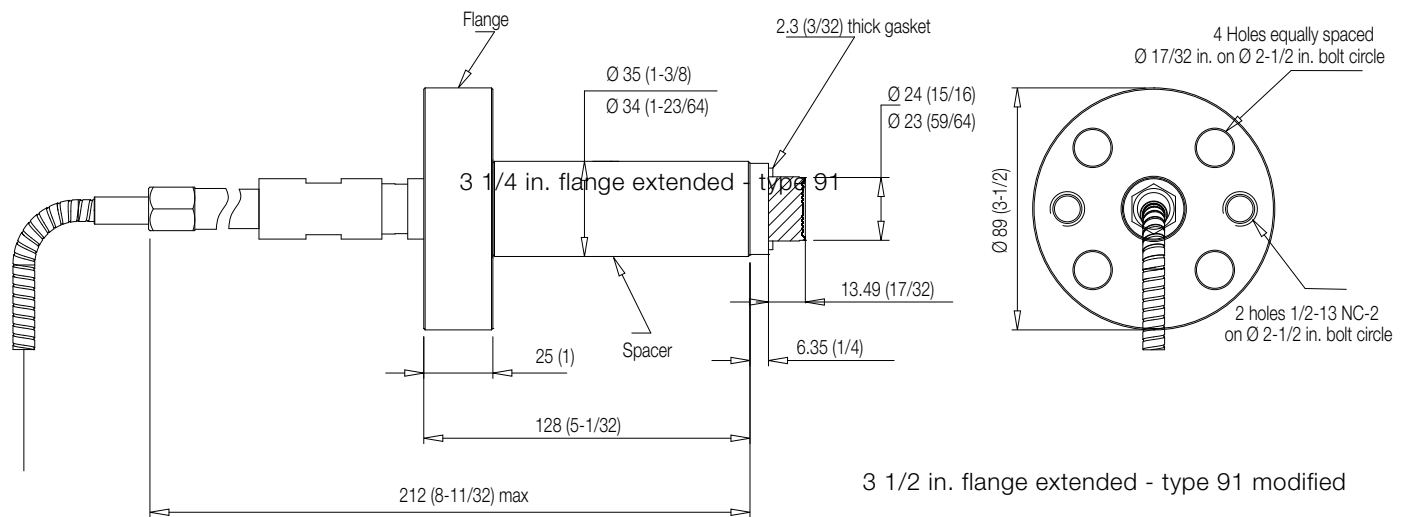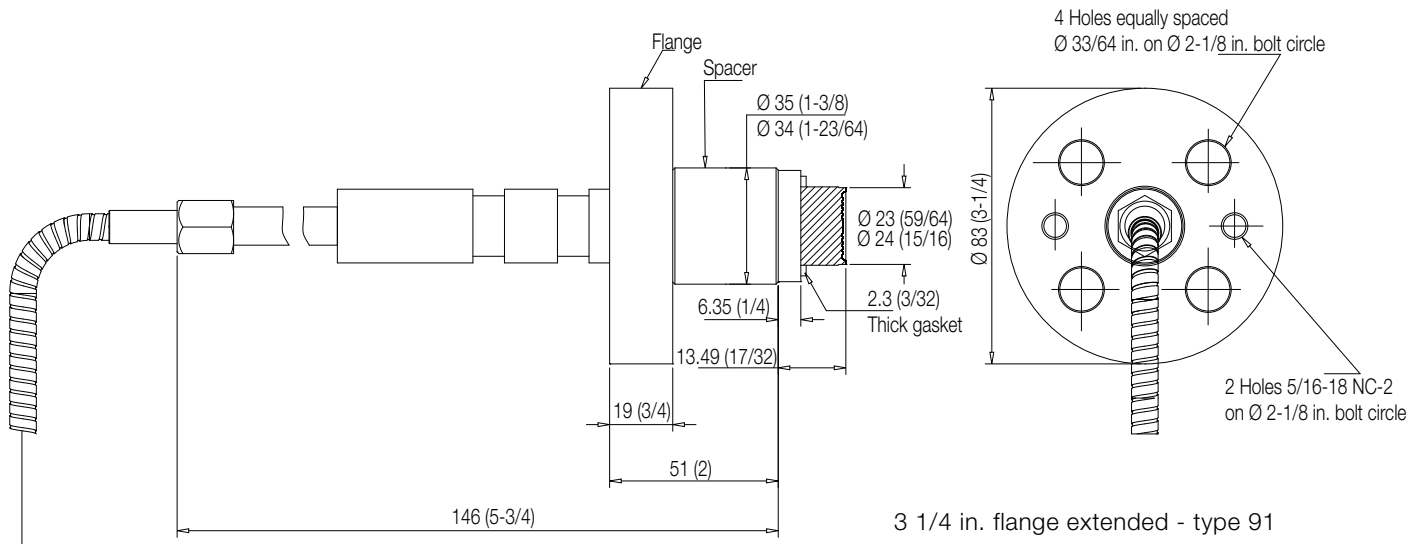

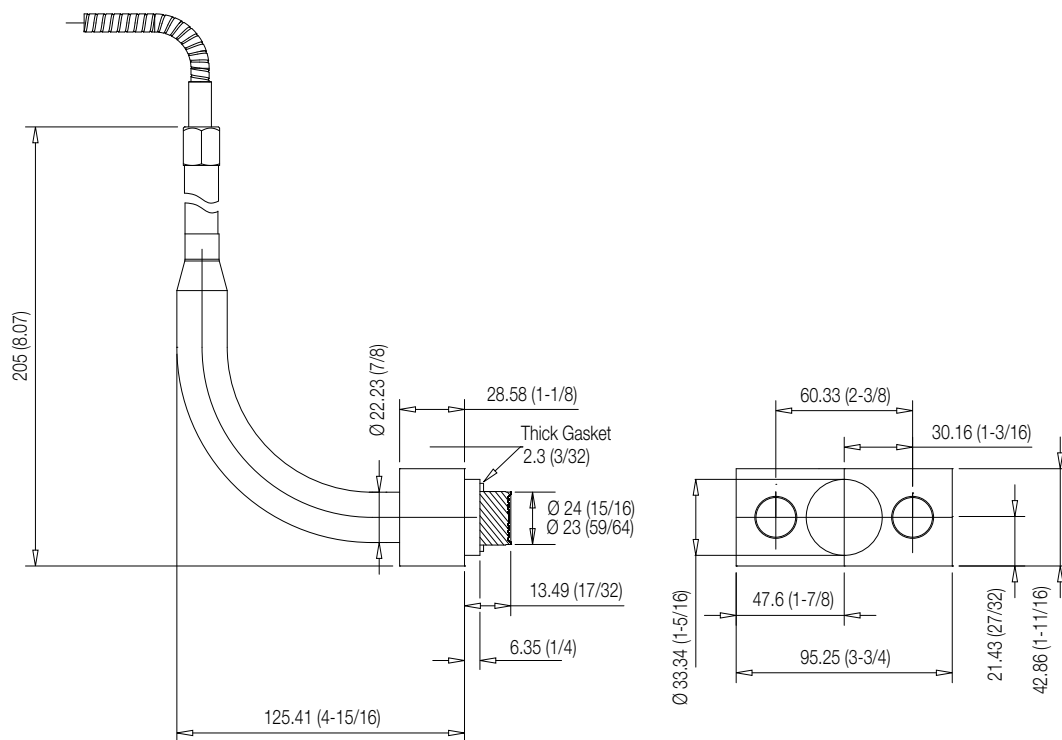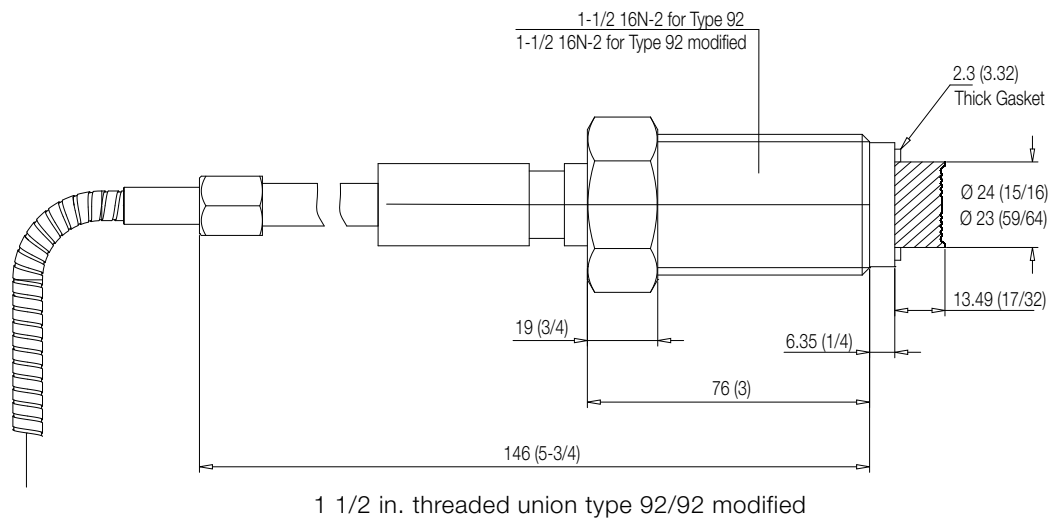

# Model 266DRH Differential


## Model 266HRH Gauge

## Model 266NRH Absolute

### S26UN Model Union connection remote diaphragm seal

The union connection remote seal are used exclusively for pressure measurement with gauge pressure transmitter.

The seal is available with an optional weld bushing, or with an optional chemical tee flange. The remote seal with a weld bushing, includes a bushing which provides the mating surface for the seal element. The union connection seal with a chemical tee flange, is designed to connect to any process fitting which accepts a chemical tee seal element (refer to Chemical Tee Seal for more information). The union seal connects to the chemical tee flange which serves as an adaptor to permit connection of the union seal to a chemical tee type fitting.

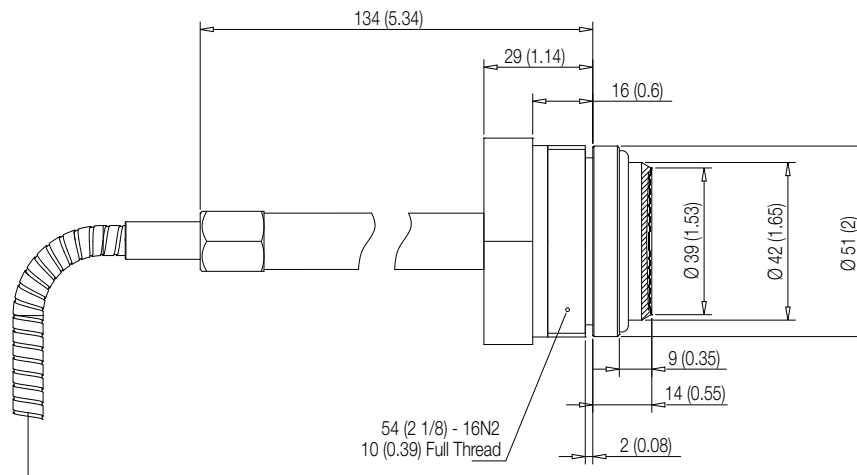


Union connection remote seal - basic version



# Model 266DRH Differential Model 266HRH Gauge Model 266NRH Absolute


## Electrical connections

### HART Version

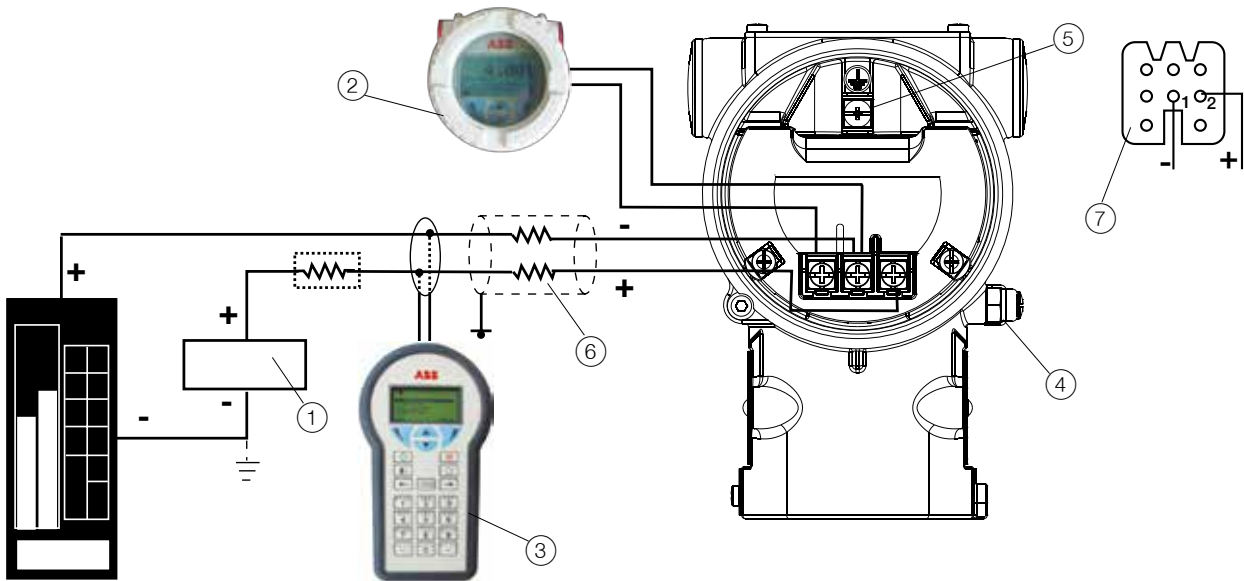


HART hand-held communicator may be connected at any wiring termination point in the loop, providing the minimum resistance is 250 ohm. If this is less than 250 ohm, additional resistance should be added to allow communications. Maximum voltage drop on external remote indicator is 0.7 V DC.

### FIELDBUS Versions

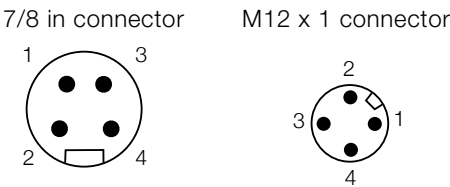

PIN (male) IDENTIFICATION		
	FOUNDATION Fieldbus	PROFIBUS PA
1	DATA -	DATA +
2	DATA +	GROUND
3	SHIELD	DATA -
4	GROUND	SHIELD


CONNECTOR IS SUPPLIED LOOSE  
WITHOUT MATING FEMALE PLUG

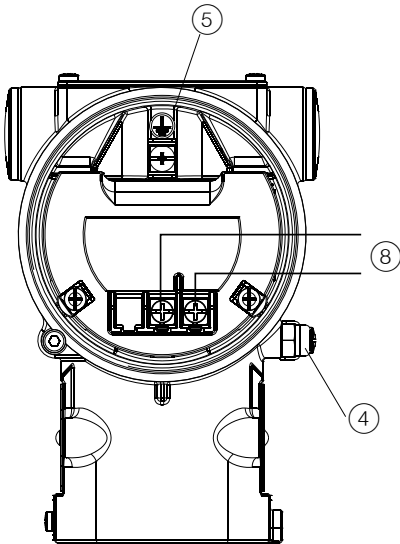

- (1) Power source | (2) Remote indicator | (3) HaNRHeld communicator | (4) External ground termination point | (5) Internal ground termination point | (6) Line load | (7) Harting Han 8D socket insert for mating plug (supplied loose) | (8) Fieldbus line (polarity independent)



## WirelessHART version

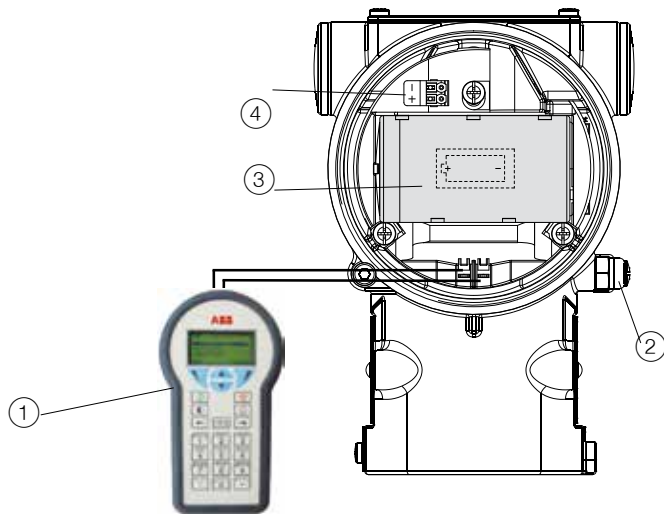

- ① HaNRHeld communicator | ② External ground termination point | ③ Battery | ④ Fast connection for harvesting unit

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### Ordering information

#### BASIC ORDERING INFORMATION model 266DRH Differential Pressure Transmitter with remote seal

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

BASE MODEL - 1 <sup>st</sup> to 6 <sup>th</sup> characters				2	6	D	R	H	X	X	X	X	X	X	X
Differential Pressure Transmitter with remote seal- BASE ACCURACY 0.06 %															
SENSOR - Span limits - 7 <sup>th</sup> character															
0.2 and 4 kPa	2 and 40 mbar	0.8 and 16 inH2O	(Note 15)						B						
0.8 and 16 kPa	8 and 160 mbar	3.2 and 64 inH2O	(Note 15)						E						
0.67 and 40 kPa	6.7 and 400 mbar	2.67 and 160 inH2O							F						
2.67 and 160 kPa	26.7 and 1600 mbar	10.7 and 642 inH2O							H						
10 and 600 kPa	0.1 and 6 bar	1.45 and 87 psi							M						
40 and 2400 kPa	0.4 and 24 bar	5.8 and 348 psi							P						
134 and 8000 kPa	1.34 and 80 bar	19.4 and 1160 psi							Q						
267 and 16000 kPa	2.67 and 160 bar	38.7 and 2320 psi	(Note 15)						S						
Application - 8th character															
Differential measurement at standard static pressure										S					
Differential measurement at high static pressure (NOT AVAILABLE WITH DIRECT MOUNT SEALS)										H					
Gauge measurement										P					
Diaphragm material / Fill fluid (wetted parts) - 9 <sup>th</sup> character															
AISI 316 L ss	Silicone oil	(one seal only to be quoted)	(Notes 3, 15)						NACE	S					
Hastelloy® C-276	Silicone oil	(one seal only to be quoted)	(Notes 3, 15, 23)						NACE	K					
Monel 400®	Silicone oil	(one seal only to be quoted)	(Notes 3, 15, 23)						NACE	M					
Tantalum	Silicone oil	(one seal only to be quoted)	(Notes 3, 15, 23)						NACE	T					
AISI 316 L ss	Inert fluid - Galden	(one seal only to be quoted)	(Notes 1, 3, 15)						NACE	A					
Hastelloy® C-276	Inert fluid - Galden	(one seal only to be quoted)	(Notes 1, 3, 15, 23)						NACE	F					
Monel 400®	Inert fluid - Galden	(one seal only to be quoted)	(Notes 1, 3, 15, 23)						NACE	C					
Tantalum	Inert fluid - Galden	(one seal only to be quoted)	(Notes 1, 3, 15, 23)						NACE	D					
AISI 316 L ss	Inert fluid - Halocarbon	(one seal only to be quoted)	(Notes 1, 3, 15)						NACE	L					
Hastelloy® C-276	Inert fluid - Halocarbon	(one seal only to be quoted)	(Notes 1, 3, 15, 23)						NACE	P					
Monel 400®	Inert fluid - Halocarbon	(one seal only to be quoted)	(Notes 1, 3, 15, 23)						NACE	4					
Tantalum	Inert fluid - Halocarbon	(one seal only to be quoted)	(Notes 1, 3, 15, 23)						NACE	5					
AISI 316 L ss (not wetted)	Silicone oil	(two seals to be quoted)	(Notes 2, 23)						NACE	R					
AISI 316 L ss (not wetted)	Inert fluid - Galden	(two seals to be quoted)	(Notes 1, 3, 15, 23)						NACE	2					
AISI 316 L ss (not wetted)	Inert fluid - Halocarbon	(two seals to be quoted)	(Notes 1, 3, 23)						NACE	W					

continued  
see next page

BASIC ORDERING INFORMATION model 266DRH Differential Pressure Transmitter				2	6	6	D	R	H	X	X	X	X
<b>Process flanges/adapters material and connection (wetted parts) - 10<sup>th</sup> character</b>													
AISI 316 L ss for two seals construction		(Notes 4, 23)	NACE							R			
AISI 316 L ss (Horizontal connection)	1/4 in. – 18 NPT-f direct	(Note 5)	NACE							A			
AISI 316 L ss (Horizontal connection)	1/2 in. – 14 NPT-f through adapter	(Notes 5, 23)	NACE							B			
Hastelloy® C-276 (Horizontal connection)	1/4 in. – 18 NPT-f direct	(Notes 5, 6, 23)	NACE							D			
Hastelloy® C-276 (Horizontal connection)	1/2 in. – 14 NPT-f through adapter	(Notes 5, 6, 23)	NACE							E			
Monel 400® (Horizontal connection)	1/4 in. – 18 NPT-f direct	(Notes 5, 6, 23)	NACE							G			
Monel 400® (Horizontal connection)	1/2 in. – 14 NPT-f through adapter	(Notes 5, 6, 23)	NACE							H			
<b>Bolts/Gasket (wetted parts) - 11<sup>th</sup> character</b>													
For standard static - AISI 316 ss (NACE) without gaskets for two seals construction – (MWP = 16 MPa)			(Notes 4, 23)	NACE						R			
For high static - Stainless steel (NACE) without gaskets for two seals construction – (MWP = 42 MPa)			(Notes 4, 23)	NACE						R			
AISI 316 ss without gaskets for two seals construction			(Notes 4, 23)							S			
AISI 316 ss	Viton®		(Note 5)							1			
AISI 316 ss	PTFE		(Notes 1, 5, 23)							2			
AISI 316 ss (NACE) – (MWP = 16 MPa)	Viton®		(Note 5)	NACE						3			
AISI 316 ss (NACE) – (MWP = 16 MPa)	PTFE		(Notes 1, 5, 23)	NACE						4			
<b>Housing material and electrical connection - 12<sup>th</sup> character</b>													
Aluminium alloy ( barrel version)	1/2 in. – 14 NPT							(Note 18)				A	
Aluminium alloy ( barrel version)	M20 x 1.5 (CM 20)	(TO BE USED for WirelessHART)										B	
Aluminium alloy ( barrel version)	Harting Han 8D connector	(general purpose only)						(Notes 7, 18)				E	
Aluminium alloy ( barrel version)	Fieldbus connector	(general purpose only)						(Notes 7, 18)				G	
AISI 316 L ss ( barrel version) (I2 or I3 required)	1/2 in. – 14 NPT							(Note 18)				S	
AISI 316 L ss ( barrel version) (I2 or I3 required)	M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)										T	
AISI 316 L ss ( barrel version) (I2 or I3 required)	Fieldbus connector	(general purpose only)						(Notes 7, 18)				Z	
AISI 316 L ss painted ( barrel version) (I2 or I3 required)	1/2 in. – 14 NPT							(Note 18)				C	
AISI 316 L ss painted ( barrel version) (I2 or I3 required)	M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)										D	
AISI 316 L ss painted ( barrel version) (I2 or I3 required)	Fieldbus connector	(general purpose only)						(Notes 7, 18)				F	
Aluminium alloy (DIN version)	M20 x 1.5 (CM20)	(not Ex d or XP)						(Note 18)				J	
Aluminium alloy (DIN version)	Harting Han 8D connector	(general purpose only)						(Notes 7, 18)				K	
Aluminium alloy (DIN version)	Fieldbus connector	(general purpose only)						(Notes 7, 18)				W	
<b>Output/Additional options - 13<sup>th</sup> character</b>													
HART and 4 to 20 mA - Standard functionality	No additional options							(Notes 8, 9)				L	
HART and 4 to 20 mA - Standard functionality	Options requested by "Additional ordering code"							(Note 8)				7	
HART and 4 to 20 mA - Advanced functionality (includes option R1)	No additional options							(Notes 8, 9)				H	
HART and 4 to 20 mA - Advanced functionality (includes option R1)	Options requested by "Additional ordering code"							(Note 8)				1	
PROFIBUS PA (includes option R1)	No additional options							(Notes 8, 9)				P	
PROFIBUS PA (includes option R1)	Options requested by "Additional ordering code"							(Note 9)				2	
FOUNDATION Fieldbus (includes option R1)	No additional options							(Notes 8, 9)				F	
FOUNDATION Fieldbus (includes option R1)	Options requested by "Additional ordering code"							(Note 9)				3	
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)	No additional options							(Notes 8, 9)				T	
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)	Options requested by "Additional ordering code"							(Note 8)				8	
WirelessHART (includes option R1)	No additional options							(Note 17)				W	
WirelessHART (includes option R1)	Options requested by "Additional ordering code"							(Note 17)				9	

NOTE - Option R1 represents the external pushbuttons

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### ADDITIONAL ORDERING INFORMATION for model 266DRH

Add one or more 2-digit code(s) after the basic ordering information to select all required options

				XX	XX	XX
<b>Improved performance</b>						
Temperature errors optimization				DE		
<b>Drain/vent valve (material and position) (wetted parts)</b>						
AISI 316 L ss	on process axis	(Note 10)	NACE			V1
AISI 316 L ss	on flange side top	(Note 10)	NACE			V2
AISI 316 L ss	on flange side bottom	(Note 10)	NACE			V3
Hastelloy® C-276	on process axis	(Note 11)	NACE			V4
Hastelloy® C-276	on flange side top	(Note 11)	NACE			V5
Hastelloy® C-276	on flange side bottom	(Note 11)	NACE			V6
Monel 400®	on process axis	(Note 12)	NACE			V7
Monel 400®	on flange side top	(Note 12)	NACE			V8
Monel 400®	on flange side bottom	(Note 12)	NACE			V9
<b>Hazardous area certifications</b>						
ATEX Intrinsic Safety Ex ia				(Notes 8, 9)		E1
ATEX Explosion Proof Ex d				(Notes 8, 9, 13, 18)		E2
ATEX Intrinsic Safety Ex ic				(Notes 8, 9, 18)		E3
Combined ATEX - Intrinsic Safety Ex ia, Explosion Proof and Intrinsic Safety Ex ic				(Notes 8, 9, 13, 18)		EW
Combined ATEX - Intrinsic Safety Ex ia and Explosion Proof				(Notes 8, 9, 13, 18)		E7
Combined ATEX, IECEx, FM Approvals (USA) and FM Approvals (Canada)				(Notes 8, 9, 13, 18)		EN
FM Approvals (Canada) approval				(Notes 8, 9, 13, 18)		E4
FM Approvals (USA) approval				(Notes 8, 9, 13, 18)		E6
FM Approvals (USA and Canada) Intrinsic Safety				(Notes 8, 9)		EA
FM Approvals (USA and Canada) Explosion Proof, Flameproof and Dust-ignitionproof				(Notes 8, 9, 13, 18)		EB
FM Approvals (USA and Canada) Nonincendive and Energy Limited				(Notes 8, 9, 18)		EC
IECEx Intrinsic Safety Ex ia				(Notes 8, 9)		E8
IECEx Explosion Proof Ex d				(Notes 8, 9, 13, 18)		E9
IECEx Intrinsic Safety Ex ic				(Notes 8, 9, 18)		ER
Combined IECEx - Intrinsic Safety Ex ia, Explosion Proof and Intrinsic Safety Ex ic				(Notes 8, 9, 13, 18)		EI
Combined IECEx - Intrinsic Safety Ex ia and Explosion Proof				(Notes 8, 9, 13, 18)		EH
NEPSI Intrinsic Safety Ex ia				(Notes 8, 9, 18)		EY
NEPSI Explosion Proof Ex d				(Notes 8, 9, 13, 18)		EZ
NEPSI Type „N“				(Notes 8, 9, 18)		ES
Combined NEPSI - Intrinsic Safety Ex ia, Explosion Proof and Type „N“				(Notes 8, 9, 13, 18)		EQ
Combined NEPSI - Intrinsic Safety Ex ia and Explosion Proof				(Notes 8, 9, 13, 18)		EP
Combined Intrinsic Safety - ATEX, IECEx and FM Approvals (USA and Canada)				(Note 19)		EF

ADDITIONAL ORDERING INFORMATION for model 266DRH			XX	XX	XX	XX
<b>Other hazardous area certifications (ONLY AS ALTERNATIVE TO BASIC CERTIFICATION CODE Ex)</b>						
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Russia	(Notes 8, 9, 18)	W1				
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Russia	(Notes 8, 9, 13, 18)	W2				
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Russia	(Notes 8, 9, 13, 18)	WC				
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Kazakhstan	(Notes 8, 9, 18)	W3				
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Kazakhstan	(Notes 8, 9, 13, 18)	W4				
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Kazakhstan	(Notes 8, 9, 13, 18)	WD				
Inmetro (Brazil) Ex ia	(Notes 8, 9, 18)	W5				
Inmetro (Brazil) Ex d	(Notes 8, 9, 13, 18)	W6				
Inmetro (Brazil) Ex nL	(Notes 8, 9, 18)	W7				
Combined Inmetro (Brazil) - Intrinsic Safety, Explosion Proof and Type „N“	(Notes 8, 9, 13, 18)	W8				
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Belarus	(Notes 8, 9, 18)	WF				
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Belarus	(Notes 8, 9, 13, 18)	WG				
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Belarus	(Notes 8, 9, 13, 18)	WH				
Kosha (Korea) Intrinsic Safety Ex ia IIC T6, IP67	(Notes 8, 9, 16, 18)	WM				
Kosha (Korea) Explosion Proof Ex d IIC T6, IP67	(Notes 8, 9, 13, 16, 18)	WN				
Combined Kosha (Korea) - Intrinsic Safety and Explosion Proof	(Notes 8, 9, 13, 16, 18)	WP				
<b>Integral LCD</b>						
Digital LCD integral display	(Note 16)	L1				
TTG (Through-The-Glass) digital LCD controlled display	(Note 16)	L5				
Integrated digital LCD display (ONLY SELECTABLE WITH OUTPUT CODE 7)	(Note 21)	LS				
<b>External non intrusive Z, S and WP pushbuttons</b>						
Transmitters with external pushbutton (ONLY SELECTABLE WITH OUTPUT CODE 7)				R1		
<b>Mounting bracket (shape and material)</b>						
For pipe mounting - Carbon steel	(Not suitable for AISI housing)				B1	
For pipe mounting - AISI 316 L ss					B2	
For wall mounting - Carbon steel	(Not suitable for AISI housing)				B3	
For wall mounting - AISI 316 L ss					B4	
Flat type for box - AISI 316 ss					B5	
<b>Surge</b>						
Surge/Transient Protector	(Note 18)					S2

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

ADDITIONAL ORDERING INFORMATION for model 266DRH					XX	XX	XX	XX	XX
<b>Operating manual (multiple selection allowed)</b>									
German (FOR HART, WirelessHART and PROFIBUS VERSIONS)					M1				
Italian (ONLY FOR HART VERSIONS)					M2				
Spanish (FOR HART, WirelessHART and FOUNDATION Fieldbus VERSIONS)					M3				
French (ONLY FOR HART VERSIONS)					M4				
English					M5				
Chinese (ONLY FOR HART VERSIONS)					M6				
Swedish (ONLY FOR HART VERSIONS)					M7				
Polish (ONLY FOR HART VERSIONS)					M9				
Portuguese (ONLY FOR HART VERSIONS)					MA				
Russian (ONLY FOR HART VERSIONS)					MB				
Dutch (ONLY FOR HART VERSIONS)					MD				
Danish (ONLY FOR HART VERSIONS)					MF				
Japanese (ONLY FOR HART VERSIONS)					MJ				
Romenian (ONLY FOR HART VERSIONS)					MR				
Turkish (ONLY FOR HART VERSIONS)					MT				
<b>Plates language</b>									
German					T1				
Italian					T2				
Spanish					T3				
French					T4				
<b>Additional tag plate</b>									
Supplemental wired-on stainless steel plate							I1		
Tag and certification stainless steel plates and laser printing of tag							I2		
Tag, certification and supplemental wired-on stainless steel plates and laser printing of tag							I3		
<b>Configuration</b>									
Standard – Pressure = inH2O/ psi at 68 °F; Temperature = deg. F								N2	
Standard – Pressure = inH2O/ psi at 39.2 °F; Temperature = deg. F								N3	
Standard – Pressure = inH2O/ psi at 20 °C; Temperature = deg. C								N4	
Standard – Pressure = inH2O/ psi at 4 °C; Temperature = deg. C								N5	
Custom								N6	
<b>Certificates (multiple selection allowed)</b>									
Inspection certificate EN 10204–3.1 of calibration (9-point)									C1
Inspection certificate EN 10204–3.1 of helium leakage test of the sensor module									C4
Inspection certificate EN 10204–3.1 of the pressure test									C5
Certificate of compliance with the order EN 10204–2.1 of instrument design									C6
Printed record of configured data of transmitter									CG
PMI test of wetted parts									CT

ADDITIONAL ORDERING INFORMATION FOR MODEL 266DRH		XX	XX	XX	XX	XX
<b>Approvals</b>						
Metrologic Pattern for Russia	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)	Y1				
Metrologic Pattern for Kazakhstan	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)	Y2				
Metrologic Pattern for Belarus	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)	Y4				
Chinese pattern	(NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)	Y5				
DNV approval (PENDING)	(Notes 16, 18)		YA			
Approval for Custody transfer (PENDING)			YC			
Conformity to NAMUR NE 021 (2004) (NOT APPLICABLE WITH SURGE PROTECTOR CODE "S2")	(Notes 16, 18, 20, 22)	YE				
<b>Material traceability</b>						
Certificate of compliance with the order EN 10204–2.1 of process wetted parts					H1	
Inspection certificate EN 10204–3.1 of process wetted parts					H3	
Test report EN 10204–2.2 of pressure bearing and process wetted parts					H4	
<b>Connector</b>						
Fieldbus 7/8 in. (Recommended for FOUNDATION Fieldbus) - (supplied loose without mating female plug)	(Notes 9, 14, 18)				U1	
Fieldbus M12x1 (Recommended for PROFIBUS PA) - (supplied loose without mating female plug)	(Notes 9, 14, 18)				U2	
Harting Han 8D – straight entry - (supplied loose)	(Notes 8, 14, 18)				U3	
Harting Han 8D – angle entry - (supplied loose)	(Notes 8, 14, 18)				U4	
<b>Electrical connection plug</b>						
One certified stainless steel plug (supplied loose with thread according to housing entries)						Z1

Note 1: Suitable for oxygen service

Note 2: Not wetted – Hastelloy C276 on AISI seat for sensor code B

Note 3: Not available with sensor code B

Note 4: Not available with low side diaphragm code S, K, M, T, A, F, C, D, L, P, 4, 5

Note 5: Not available with low side diaphragm code R, 2, W

Note 6: Not available with diaphragm material/fill fluid code S, A, L

Note 7: Select type in additional ordering code

Note 8: Not available with Housing code G, Z, W, F

Note 9: Not available with Housing code E, K

Note 10: Not available with Process flanges/adapters code D, E, G, H, R

Note 11: Not available with Process flanges/adapters code A, B, G, H, R

Note 12: Not available with Process flanges/adapters code A, B, D, E, R

Note 13: Not available with Housing code J, K, W

Note 14: Not available with Housing code A, B, S, T, J

Note 15: Not available with high static pressure code H

Note 16: Not available with Output code 7

Note 17: Not available with Housing code A, E, G, S, Z, C, F, J, K, W

Note 18: Not available with Output code 9, W

Note 19: Not available with Output code 1, 2, 3, 7, 8

Note 20: Not available with Output code 2, 3

Note 21: Not available with Hazardous area certification code EY, EZ, ES, EQ, EP, W1, W2, WC, W3, W4, WD, W5, W6, W7, W8, WF, WG, WH, WM, WN, WP

Note 22: Not available with Hazardous area certification code EW, EN, E4, E6, EA, EB, EC, EY, EZ, ES, EQ, EP, W1, W2, WC, W3, W4, WD, W5, W6, W7, W8, WF, WG, WH, WM, WN, WP

Note 23: Not available with Application code P (gauge measurement)

### Standard delivery items (can be differently specified by additional ordering code)

- Adapter supplied loose
- Plug on axis of horizontal connection flange
- General purpose (no electrical certification)
- No display, no mounting bracket, no surge protection
- Multilanguage short-form operating instruction manual and labels in english (metal nameplate; self-adhesive certification and tag)
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model 266HRH Gauge Pressure Transmitter with remote seal

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 6 <sup>th</sup> characters			<b>2 6 6 H R H</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Gauge Pressure Transmitter with remote seal – BASE ACCURACY 0.06 %								
<b>SENSOR - Span limits</b> - 7 <sup>th</sup> character								see next page
0.67 and 40 kPa	6.7 and 400 mbar	2.67 and 160 inH2O	F					
2.67 and 160 kPa	26.7 and 1600 mbar	10.7 and 642 inH2O	H					
10 and 600 kPa	0.1 and 6 bar	1.45 and 87 psi	M					
40 and 2400 kPa	0.4 and 24 bar	5.8 and 348 psi	P					
134 and 8000 kPa	1.34 and 80 bar	19.4 and 1160 psi	Q					
267 and 16000 kPa	2.67 and 160 bar	38.7 and 2320 psi	S					
1400 and 70000 kPa	14 and 700 bar	203 and 10150 psi	W					
10500 and 105000 kPa	105 and 1050 bar	1522 and 15225 psi	Z					
<b>Diaphragm material / Fill fluid</b> - 8 <sup>th</sup> character								
AISI 316 L ss	Silicone oil	(Note 9)	NACE	R				
AISI 316 L ss	Inert fluid - Galden	(Notes 1, 2, 9)	NACE	2				
AISI 316 L ss	Inert fluid - Halocarbon	(Notes 1, 2, 9)	NACE	W				
Inconel® 718	No filling	(Notes 2, 10)		U				
<b>Process connection</b> - 9 <sup>th</sup> character								
Remote seal	(one seal to be quoted separately)						R	
Button type remote seal	(one button seal to be quoted separately)		(Note 17)				G	
<b>Housing material and electrical connection</b> - 10 <sup>th</sup> character								
Aluminium alloy (barrel version)	1/2 in. – 14 NPT		(Note 12)				A	
Aluminium alloy (barrel version)	M20 x 1.5 (CM 20)	(TO BE USED for WirelessHART)					B	
Aluminium alloy (barrel version)	Harting Han 8D connector	(general purpose only)	(Notes 3, 12)				E	
Aluminium alloy (barrel version)	Fieldbus connector	(general purpose only)	(Notes 3, 12)				G	
AISI 316 L ss (barrel version) (I2 or I3 required)	1/2 in. – 14 NPT		(Note 12)				S	
AISI 316 L ss (barrel version) (I2 or I3 required)	M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)					T	
AISI 316 L ss (barrel version) (I2 or I3 required)	Fieldbus connector	(general purpose only)	(Notes 3, 12)				Z	
AISI 316 L ss painted ( barrel version) (I2 or I3 required)	1/2 in. – 14 NPT		(Note 12)				C	
AISI 316 L ss painted ( barrel version) (I2 or I3 required)	M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)					D	
AISI 316 L ss painted ( barrel version) (I2 or I3 required)	Fieldbus connector	(general purpose only)	(Notes 3, 12)				F	
Aluminium alloy (DIN version)	M20 x 1.5 (CM20)	(not Ex d or XP)	(Note 12)				J	
Aluminium alloy (DIN version)	Harting Han 8D connector	(general purpose only)	(Notes 3, 12)				K	
Aluminium alloy (DIN version)	Fieldbus connector	(general purpose only)	(Notes 3, 12)				W	



BASIC ORDERING INFORMATION model 266HRH Differential Pressure Transmitter				2 6 6 H R H X X X X	X
Output/Additional options - 11 <sup>th</sup> character					
HART and 4 to 20 mA - Standard functionality	No additional options	(Notes 2, 4, 5, 9)			L
HART and 4 to 20 mA - Standard functionality	Options requested by "Additional ordering code"	(Notes 2, 4, 9)			7
HART and 4 to 20 mA - Advanced functionality (includes option R1)	No additional options	(Notes 4, 5)			H
HART and 4 to 20 mA - Advanced functionality (includes option R1)	Options requested by "Additional ordering code"	(Note 4)			1
PROFIBUS PA (includes option R1)	No additional options	(Notes 4, 5)			P
PROFIBUS PA (includes option R1)	Options requested by "Additional ordering code"	(Note 5)			2
FOUNDATION Fieldbus (includes option R1)	No additional options	(Notes 4, 5)			F
FOUNDATION Fieldbus (includes option R1)	Options requested by "Additional ordering code"	(Note 5)			3
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)	No additional options	(Notes 4, 5)			T
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)	Options requested by "Additional ordering code"	(Note 4)			8
WirelessHART (includes option R1)	No additional options	(Notes 2, 9, 11)			W
WirelessHART (includes option R1)	Options requested by "Additional ordering code"	(Notes 2, 9, 11)			9

NOTE - Option R1 represents the external pushbuttons

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### ADDITIONAL ORDERING INFORMATION for model 266HRH

Add one or more 2-digit code(s) after the basic ordering information to select all required options

		XX
<b>Hazardous area certifications</b>		
ATEX Intrinsic Safety Ex ia	(Notes 4, 5)	E1
ATEX Explosion Proof Ex d	(Notes 4, 5, 6, 12)	E2
ATEX Intrinsic Safety Ex ic	(Notes 4, 5, 12)	E3
Combined ATEX - Intrinsic Safety Ex ia, Explosion Proof and Intrinsic Safety Ex ic	(Notes 4, 5, 6, 12)	EW
Combined ATEX - Intrinsic Safety Ex ia and Explosion Proof	(Notes 4, 5, 6, 12)	E7
Combined ATEX, IECEx, FM Approvals (USA) and FM Approvals (Canada)	(Notes 4, 5, 6, 12)	EN
FM Approvals (Canada) approval	(Notes 4, 5, 6, 12)	E4
FM Approvals (USA) approval	(Notes 4, 5, 6, 12)	E6
FM Approvals (USA and Canada) Intrinsic Safety	(Notes 4, 5)	EA
FM Approvals (USA and Canada) Explosion Proof, Flameproof and Dust-ignitionproof	(Notes 4, 5, 6, 12)	EB
FM Approvals (USA and Canada) Nonincendive and Energy Limited	(Notes 4, 5, 12)	EC
IECEx Intrinsic Safety Ex ia	(Notes 4, 5)	E8
IECEx Explosion Proof Ex d	(Notes 4, 5, 6, 12)	E9
IECEx Intrinsic Safety Ex ic	(Notes 4, 5, 12)	ER
Combined IECEx - Intrinsic Safety Ex ia, Explosion Proof and Intrinsic Safety Ex ic	(Notes 4, 5, 6, 12)	EI
Combined IECEx - Intrinsic Safety Ex ia and Explosion Proof	(Notes 4, 5, 6, 12)	EH
NEPSI Intrinsic Safety Ex ia	(Notes 2, 4, 5, 12)	EY
NEPSI Explosion Proof Ex d	(Notes 2, 4, 5, 6, 12)	EZ
NEPSI Type „N“	(Notes 2, 4, 5, 12)	ES
Combined NEPSI - Intrinsic Safety Ex ia, Explosion Proof and Type „N“	(Notes 2, 4, 5, 6, 12)	EQ
Combined NEPSI - Intrinsic Safety Ex ia and Explosion Proof	(Notes 2, 4, 5, 6, 12)	EP
Combined Intrinsic Safety - ATEX, IECEx and FM Approvals (USA and Canada)	(Notes 2, 13)	EF
<b>Other hazardous area certifications (ONLY AS ALTERNATIVE TO BASIC CERTIFICATION CODE Ex)</b>		
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Russia	(Notes 4, 5, 12)	W1
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Russia	(Notes 4, 5, 6, 12)	W2
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Russia	(Notes 4, 5, 6, 12)	WC
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Kazakhstan	(Notes 4, 5, 12)	W3
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Kazakhstan	(Notes 4, 5, 6, 12)	W4
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Kazakhstan	(Notes 4, 5, 6, 12)	WD
Inmetro (Brazil) Ex ia	(Notes 4, 5, 12)	W5
Inmetro (Brazil) Ex d	(Notes 4, 5, 6, 12)	W6
Inmetro (Brazil) Ex nL	(Notes 4, 5, 12)	W7
Combined Inmetro (Brazil) - Intrinsic Safety, Explosion Proof and Type „N“	(Notes 4, 5, 6, 12)	W8
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Belarus	(Notes 4, 5, 12)	WF
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Belarus	(Notes 4, 5, 6, 12)	WG
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Belarus	(Notes 4, 5, 6, 12)	WH
Kosha (Korea) Intrinsic Safety Ex ia IIC T6, IP67	(Notes 2, 4, 5, 8, 12)	WM
Kosha (Korea) Explosion Proof Ex d IIC T6, IP67	(Notes 2, 4, 5, 6, 8, 12)	WN
Combined Kosha (Korea) - Intrinsic Safety and Explosion Proof	(Notes 2, 4, 5, 6, 8, 12)	WP

ADDITIONAL ORDERING INFORMATION for model 266HRH						XX	XX	XX	XX	XX	XX	XX	XX
<b>Integral LCD</b>													
Digital LCD integral display						(Note 8)	L1						
TTG (Through-The-Glass) digital LCD controlled display						(Note 8)	L5						
Integrated digital LCD display (ONLY SELECTABLE WITH OUTPUT CODE 7)						(Note 15)	LS						
<b>External non intrusive Z, S and WP pushbuttons</b>													
Transmitters with external pushbutton (ONLY SELECTABLE WITH OUTPUT CODE 7)								R1					
<b>Mounting bracket (shape and material)</b>													
For pipe/wall mounting - Carbon steel						(Not suitable for AISI housing)						B6	
For pipe/wall mounting - AISI 316 L ss												B7	
<b>Surge</b>													
Surge/Transient Protector						(Note 12)				S2			
<b>Operating manual (multiple selection allowed)</b>													
German (FOR HART, WirelessHART and PROFIBUS VERSIONS)												M1	
Italian (ONLY FOR HART VERSIONS)												M2	
Spanish (FOR HART, WirelessHART and FOUNDATION Fieldbus VERSIONS)												M3	
French (ONLY FOR HART VERSIONS)												M4	
English												M5	
Chinese (ONLY FOR HART VERSIONS)												M6	
Swedish (ONLY FOR HART VERSIONS)												M7	
Polish (ONLY FOR HART VERSIONS)												M9	
Portuguese (ONLY FOR HART VERSIONS)												MA	
Russian (ONLY FOR HART VERSIONS)												MB	
Dutch (ONLY FOR HART VERSIONS)												MD	
Danish (ONLY FOR HART VERSIONS)												MF	
Japanese (ONLY FOR HART VERSIONS)												MJ	
Romenian (ONLY FOR HART VERSIONS)												MR	
Turkish (ONLY FOR HART VERSIONS)												MT	
<b>Plates language</b>													
German												T1	
Italian												T2	
Spanish												T3	
French												T4	
<b>Additional tag plate</b>													
Supplemental wired-on stainless steel plate												I1	
Tag and certification stainless steel plates and laser printing of tag												I2	
Tag, certification and supplemental wired-on stainless steel plates and laser printing of tag												I3	
<b>Configuration</b>													
Standard – Pressure = inH2O/ psi at 68 °F; Temperature = deg. F													N2
Standard – Pressure = inH2O/ psi at 39.2 °F; Temperature = deg. F													N3
Standard – Pressure = inH2O/ psi at 20 °C; Temperature = deg. C													N4
Standard – Pressure = inH2O/ psi at 4 °C; Temperature = deg. C													N5
Custom													N6

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

ADDITIONAL ORDERING INFORMATION FOR MODEL 266HRH							XX	XX	XX	XX	XX	XX
<b>Approvals</b>												
<b>Certificates (multiple selection allowed)</b>												
Inspection certificate EN 10204–3.1 of calibration (9-point)							C1					
Inspection certificate EN 10204–3.1 of the pressure test							C5					
Certificate of compliance with the order EN 10204–2.1 of instrument design							C6					
Printed record of configured data of transmitter							CG					
PMI test of wetted parts							CT					
Metrologic Pattern for Russia (NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)								Y1				
Metrologic Pattern for Kazakhstan (NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)								Y2				
Metrologic Pattern for Belarus (NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)								Y4				
Chinese pattern (NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)								Y5				
DNV approval (PENDING) (Notes 2, 8, 9, 12)									YA			
Approval for Custody transfer (PENDING)									YC			
Conformity to NAMUR NE 021 (2004) (NOT APPLICABLE WITH SURGE PROTECTOR CODE "S2") (Notes 2, 8, 9, 12, 14, 16)									YE			
<b>Material traceability</b>												
Certificate of compliance with the order EN 10204–2.1 of process wetted parts										H1		
Inspection certificate EN 10204–3.1 of process wetted parts										H3		
Test report EN 10204–2.2 of pressure bearing and process wetted parts										H4		
<b>Connector</b>												
Fieldbus 7/8 in. (Recommended for FOUNDATION Fieldbus) - (supplied loose without mating female plug)								(Notes 5, 7, 12)		U1		
Fieldbus M12x1 (Recommended for PROFIBUS PA) - (supplied loose without mating female plug)								(Notes 5, 7, 12)		U2		
Harting Han 8D – straight entry - (supplied loose)								(Notes 4, 7, 12)		U3		
Harting Han 8D – angle entry - (supplied loose)								(Notes 4, 7, 12)		U4		
<b>Electrical connection plug</b>												
One certified stainless steel plug (supplied loose with thread according to housing entries)											Z1	

Note 1: Suitable for oxygen service

Note 2: Not available with Sensor code W

Note 3: Select type in additional ordering code

Note 4: Not available with Housing code G, Z, W, F

Note 5: Not available with Housing code E, K

Note 6: Not available with Housing code J, K, W

Note 7: Not available with Housing code A, B, S, T, J

Note 8: Not available with Output code 7

Note 9: Not available with Sensor code Z

Note 10: Not available with Sensor code F to S

Note 11: Not available with Housing code A, E, G, S, Z, C, F, J, K, W

Note 12: Not available with Output code 9, W

Note 13: Not available with Output code 1, 2, 3, 7, 8

Note 14: Not available with Output code 2, 3

Note 15: Not available with Hazardous area certification code EY, EZ, ES, EQ, EP, W1, W2, WC, W3, W4, WD, W5, W6, W7, W8, WF, WG, WH, WM, WN, WP

Note 16: Not available with Hazardous area certification code EW, EN, E4, E6, EA, EB, EC, EY, EZ, ES, EQ, EP, W1, W2, WC, W3, W4, WD, W5, W6, W7, W8, WF, WG, WH, WM, WN, WP

Note 17: Not available with Sensor code F, H, M, P

### Standard delivery items (can be differently specified by additional ordering code)

- General purpose (no electrical certification)
- No display, no mounting bracket, no surge protection
- Multilanguage short-form operating instruction manual and labels in english (metal nameplate; self-adhesive certification and tag)
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates

## BASIC ORDERING INFORMATION model 266NRH Absolute Pressure Transmitter with remote seal

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

BASE MODEL - 1 <sup>st</sup> to 6 <sup>th</sup> characters				2	6	N	R	H	X	X	X	X	X
Absolute Pressure Transmitter with remote seal – BASE ACCURACY 0.10 %													
SENSOR - Span limits - 7 <sup>th</sup> character													
0.67 and 40 kPa	6.7 and 400 mbar	5 and 300 mmHg							F				
2.67 and 160 kPa	26.7 and 1600 mbar	10.7 and 642 inH2O							H				
10 and 600 kPa	0.1 and 6 bar	1.45 and 87 psi							M				
40 and 2400 kPa	0.4 and 24 bar	5.8 and 348 psi							P				
134 and 8000 kPa	1.34 and 80 bar	19.4 and 1160 psi							Q				
267 and 16000 kPa	2.67 and 160 bar	38.7 and 2320 psi							S				
Diaphragm material / Fill fluid - 8 <sup>th</sup> character													
AISI 316 L ss		Silicone oil							NACE	R			
AISI 316 L ss		Inert fluid - Galden	(Note 1)						NACE	2			
AISI 316 L ss		Inert fluid - Halocarbon	(Note 1)						NACE	W			
Process connection - 9 <sup>th</sup> character													
Remote seal			(one seal to be quoted separately)							R			
Housing material and electrical connection - 10 <sup>th</sup> character													
Aluminium alloy (barrel version)	1/2 in. – 14 NPT		(Note 9)									A	
Aluminium alloy (barrel version)	M20 x 1.5 (CM 20)	(TO BE USED for WirelessHART)										B	
Aluminium alloy (barrel version)	Harting Han 8D connector	(general purpose only)	(Notes 2, 9)									E	
Aluminium alloy (barrel version)	Fieldbus connector	(general purpose only)	(Notes 2, 9)									G	
AISI 316 L ss (barrel version) (I2 or I3 required)	1/2 in. – 14 NPT		(Note 9)									S	
AISI 316 L ss (barrel version) (I2 or I3 required)	M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)										T	
AISI 316 L ss (barrel version) (I2 or I3 required)	Fieldbus connector	(general purpose only)	(Notes 2, 9)									Z	
AISI 316 L ss painted ( barrel version) (I2 or I3 required)	1/2 in. – 14 NPT		(Note 9)									C	
AISI 316 L ss painted ( barrel version) (I2 or I3 required)	M20 x 1.5 (CM20)	(TO BE USED for WirelessHART)										D	
AISI 316 L ss painted ( barrel version) (I2 or I3 required)	Fieldbus connector	(general purpose only)	(Notes 2, 9)									F	
Aluminium alloy (DIN version)	M20 x 1.5 (CM20)	(not Ex d or XP)	(Note 9)									J	
Aluminium alloy (DIN version)	Harting Han 8D connector	(general purpose only)	(Notes 2, 9)									K	
Aluminium alloy (DIN version)	Fieldbus connector	(general purpose only)	(Notes 2, 9)									W	
Output/Additional options - 11 <sup>th</sup> character													
HART and 4 to 20 mA - Standard functionality	No additional options		(Notes 3, 4)									L	
HART and 4 to 20 mA - Standard functionality	Options requested by "Additional ordering code"		(Note 3)									7	
HART and 4 to 20 mA - Advanced functionality (includes option R1)	No additional options		(Notes 3, 4)									H	
HART and 4 to 20 mA - Advanced functionality (includes option R1)	Options requested by "Additional ordering code"		(Note 3)									1	
PROFIBUS PA (includes option R1)	No additional options		(Notes 3, 4)									P	
PROFIBUS PA (includes option R1)	Options requested by "Additional ordering code"		(Note 4)									2	
FOUNDATION Fieldbus (includes option R1)	No additional options		(Notes 3, 4)									F	
FOUNDATION Fieldbus (includes option R1)	Options requested by "Additional ordering code"		(Note 4)									3	
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)	No additional options		(Notes 3, 4)									T	
HART and 4 to 20 mA Safety, certified to IEC 61508 (includes option R1)	Options requested by "Additional ordering code"		(Note 3)									8	
WirelessHART (includes option R1)	No additional options		(Note 8)									W	
WirelessHART (includes option R1)	Options requested by "Additional ordering code"		(Note 8)									9	

NOTE - Option R1 represents the external pushbuttons

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### ADDITIONAL ORDERING INFORMATION for model 266NRH

Add one or more 2-digit code(s) after the basic ordering information to select all required options

			XX
<b>Hazardous area certifications</b>			
ATEX Intrinsic Safety Ex ia	(Notes 3, 4)	E1	
ATEX Explosion Proof Ex d	(Notes 3, 4, 5, 9)	E2	
ATEX Intrinsic Safety Ex ic	(Notes 3, 4, 9)	E3	
Combined ATEX - Intrinsic Safety Ex ia, Explosion Proof and Intrinsic Safety Ex ic	(Notes 3, 4, 5, 9)	EW	
Combined ATEX - Intrinsic Safety Ex ia and Explosion Proof	(Notes 3, 4, 5, 9)	E7	
Combined ATEX, IECEx, FM Approvals (USA) and FM Approvals (Canada)	(Notes 3, 4, 5, 9)	EN	
FM Approvals (Canada) approval	(Notes 3, 4, 5, 9)	E4	
FM Approvals (USA) approval	(Notes 3, 4, 5, 9)	E6	
FM Approvals (USA and Canada) Intrinsic Safety	(Notes 3, 4)	EA	
FM Approvals (USA and Canada) Explosion Proof, Flameproof and Dust-ignitionproof	(Notes 3, 4, 5, 9)	EB	
FM Approvals (USA and Canada) Nonincendive and Energy Limited	(Notes 3, 4, 9)	EC	
IECEx Intrinsic Safety Ex ia	(Notes 3, 4)	E8	
IECEx Explosion Proof Ex d	(Notes 3, 4, 5, 9)	E9	
IECEx Intrinsic Safety Ex ic	(Notes 3, 4, 9)	ER	
Combined IECEx - Intrinsic Safety Ex ia, Explosion Proof and Intrinsic Safety Ex ic	(Notes 3, 4, 5, 9)	EI	
Combined IECEx - Intrinsic Safety Ex ia and Explosion Proof	(Notes 3, 4, 5, 9)	EH	
NEPSI Intrinsic Safety Ex ia	(Notes 3, 4, 9)	EY	
NEPSI Explosion Proof Ex d	(Notes 3, 4, 5, 9)	EZ	
NEPSI Type „N“	(Notes 3, 4, 9)	ES	
Combined NEPSI - Intrinsic Safety Ex ia, Explosion Proof and Type „N“	(Notes 3, 4, 5, 9)	EQ	
Combined NEPSI - Intrinsic Safety Ex ia and Explosion Proof	(Notes 3, 4, 5, 9)	EP	
Combined Intrinsic Safety - ATEX, IECEx and FM Approvals (USA and Canada)	(Note 10)	EF	
<b>Other hazardous area certifications (ONLY AS ALTERNATIVE TO BASIC CERTIFICATION CODE Ex)</b>			
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Russia	(Notes 3, 4, 9)	W1	
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Russia	(Notes 3, 4, 5, 9)	W2	
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Russia	(Notes 3, 4, 5, 9)	WC	
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Kazakhstan	(Notes 3, 4, 9)	W3	
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Kazakhstan	(Notes 3, 4, 5, 9)	W4	
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Kazakhstan	(Notes 3, 4, 5, 9)	WD	
Inmetro (Brazil) Ex ia	(Notes 3, 4, 9)	W5	
Inmetro (Brazil) Ex d	(Notes 3, 4, 5, 9)	W6	
Inmetro (Brazil) Ex nL	(Notes 3, 4, 9)	W7	
Combined Inmetro (Brazil) - Intrinsic Safety, Explosion Proof and Type „N“	(Notes 3, 4, 5, 9)	W8	
Technical Regulations Customs Union (EAC) Intrinsic Safety Ex ia for Belarus	(Notes 3, 4, 9)	WF	
Technical Regulations Customs Union (EAC) Explosion Proof Ex d for Belarus	(Notes 3, 4, 5, 9)	WG	
Technical Regulations Customs Union (EAC) combined Ex ia and Ex d for Belarus	(Notes 3, 4, 5, 9)	WH	
Kosha (Korea) Intrinsic Safety Ex ia IIC T6, IP67	(Notes 3, 4, 7, 9)	WM	
Kosha (Korea) Explosion Proof Ex d IIC T6, IP67	(Notes 3, 4, 5, 7, 9)	WN	
Combined Kosha (Korea) - Intrinsic Safety and Explosion Proof	(Notes 3, 4, 5, 7, 9)	WP	

ADDITIONAL ORDERING INFORMATION for model 266NRH							XX	XX	XX	XX	XX	XX	XX
<b>Integral LCD</b>													
Digital LCD integral display						(Note 7) L1							
TTG (Through-The-Glass) digital LCD controlled display						(Note 7) L5							
Integrated digital LCD display (ONLY SELECTABLE WITH OUTPUT CODE 7)						(Note 12) LS							
<b>External non intrusive Z, S and WP pushbuttons</b>													
Transmitters with external pushbutton (ONLY SELECTABLE WITH OUTPUT CODE 7)							R1						
<b>Mounting bracket (shape and material)</b>													
For pipe/wall mounting - Carbon steel (Not suitable for AISI housing)								B6					
For pipe/wall mounting - AISI 316 L ss								B7					
<b>Surge</b>													
Surge/Transient Protector (Note 9)								S2					
<b>Operating manual (multiple selection allowed)</b>													
German (FOR HART, WirelessHART and PROFIBUS VERSIONS)									M1				
Italian (ONLY FOR HART VERSIONS)									M2				
Spanish (FOR HART, WirelessHART and FOUNDATION Fieldbus VERSIONS)									M3				
French (ONLY FOR HART VERSIONS)									M4				
English									M5				
Chinese (ONLY FOR HART VERSIONS)									M6				
Swedish (ONLY FOR HART VERSIONS)									M7				
Polish (ONLY FOR HART VERSIONS)									M9				
Portuguese (ONLY FOR HART VERSIONS)									MA				
Russian (ONLY FOR HART VERSIONS)									MB				
Dutch (ONLY FOR HART VERSIONS)									MD				
Danish (ONLY FOR HART VERSIONS)									MF				
Japanese (ONLY FOR HART VERSIONS)									MJ				
Romenian (ONLY FOR HART VERSIONS)									MR				
Turkish (ONLY FOR HART VERSIONS)									MT				
<b>Plates language</b>													
German									T1				
Italian									T2				
Spanish									T3				
French									T4				
<b>Additional tag plate</b>													
Supplemental wired-on stainless steel plate										I1			
Tag and certification stainless steel plates and laser printing of tag										I2			
Tag, certification and supplemental wired-on stainless steel plates and laser printing of tag										I3			
<b>Configuration</b>													
Standard – Pressure = inH2O/ psi at 68 °F; Temperature = deg. F											N2		
Standard – Pressure = inH2O/ psi at 39.2 °F; Temperature = deg. F											N3		
Standard – Pressure = inH2O/ psi at 20 °C; Temperature = deg. C											N4		
Standard – Pressure = inH2O/ psi at 4 °C; Temperature = deg. C											N5		
Custom											N6		

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

ADDITIONAL ORDERING INFORMATION FOR MODEL 266NRH							XX	XX	XX	XX	XX	XX
<b>Approvals</b>												
<b>Certificates (multiple selection allowed)</b>												
Inspection certificate EN 10204–3.1 of calibration (9-point)							C1					
Inspection certificate EN 10204–3.1 of the pressure test							C5					
Certificate of compliance with the order EN 10204–2.1 of instrument design							C6					
Printed record of configured data of transmitter							CG					
PMI test of wetted parts							CT					
Metrologic Pattern for Russia (NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)							Y1					
Metrologic Pattern for Kazakhstan (NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)							Y2					
Metrologic Pattern for Belarus (NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)							Y4					
Chinese pattern (NOT APPLICABLE WITH ANY HAZARDOUS AREA CERTIFICATION)							Y5					
DNV approval (PENDING) (Notes 7, 9)									YA			
Approval for Custody transfer (PENDING)									YC			
Conformity to NAMUR NE 021 (2004) (NOT APPLICABLE WITH SURGE PROTECTOR CODE "S2") (Notes 7, 9, 11, 13)									YE			
<b>Material traceability</b>												
Certificate of compliance with the order EN 10204–2.1 of process wetted parts										H1		
Inspection certificate EN 10204–3.1 of process wetted parts										H3		
Test report EN 10204–2.2 of pressure bearing and process wetted parts										H4		
<b>Connector</b>												
Fieldbus 7/8 in. (Recommended for FOUNDATION Fieldbus) - (supplied loose without mating female plug)							(Notes 4, 6, 9)			U1		
Fieldbus M12x1 (Recommended for PROFIBUS PA) - (supplied loose without mating female plug)							(Notes 4, 6, 9)			U2		
Harting Han 8D – straight entry - (supplied loose)							(Notes 3, 6, 9)			U3		
Harting Han 8D – angle entry - (supplied loose)							(Notes 3, 6, 9)			U4		
<b>Electrical connection plug</b>												
One certified stainless steel plug (supplied loose with thread according to housing entries)											Z1	

Note 1: Suitable for oxygen service

Note 2: Select type in additional ordering code

Note 3: Not available with Housing code G, Z, W, F

Note 4: Not available with Housing code E, K

Note 5: Not available with Housing code J, K, W

Note 6: Not available with Housing code A, B, S, T, J

Note 7: Not available with Output code 7

Note 8: Not available with Housing code A, E, G, S, Z, C, F, J, K, W

Note 9: Not available with Output code 9, W

Note 10: Not available with Output code 1, 2, 3, 7, 8

Note 11: Not available with Output code 2, 3

Note 12: Not available with Hazardous area certification code EY, EZ, ES, EQ, EP, W1, W2, WC, W3, W4, WD, W5, W6, W7, W8, WF, WG, WH, WM, WN, WP

Note 13: Not available with Hazardous area certification code EW, EN, E4, E6, EA, EB, EC, EY, EZ, ES, EQ, EP, W1, W2, WC, W3, W4, WD, W5, W6, W7, W8, WF, WG, WH, WM, WN, WP

### Standard delivery items (can be differently specified by additional ordering code)

- General purpose (no electrical certification)
- No display, no mounting bracket, no surge protection
- Multilanguage short-form operating instruction manual and labels in english (metal nameplate; self-adhesive certification and tag)
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates



## BASIC ORDERING INFORMATION model S26RA Rotating flange diaphragm seals (flush and extended) to ASME B16.5

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters					<b>S</b>	<b>2</b>	<b>6</b>	<b>R</b>	<b>A</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Rotating flange diaphragm seal (Raised face flush and extended) to ASME B16.5																			
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																			
High pressure side										H									
Low pressure side										L									
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																			
ASME CL 150 / 2 in.											E1								
ASME CL 300 / 2 in.											E2								
ASME CL 600 / 2 in.											E3								
ASME CL 900-1500 / 2 in.											E5								
ASME CL 150 / 3 in.											G1								
ASME CL 300 / 3 in.											G2								
ASME CL 600 / 3 in.											G3								
ASME CL 900 / 3 in.											G4								
ASME CL 1500 / 3 in.											G5								
ASME CL 150 / 4 in.											H1								
ASME CL 300 / 4 in.											H2								
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character																			
Carbon steel												C							
AISI 316 ss												S							
<b>Extensions Length and Material</b> - 10 <sup>th</sup> character																			
Flush														F					
50 mm (2 in.)					AISI 316 L ss	(Note 1)								1					
50 mm (2 in.)					Hastelloy C-276	(Note 1)								2					
100 mm (4 in.)					AISI 316 L ss	(Note 1)								3					
100 mm (4 in.)					Hastelloy C-276	(Note 1)								4					
150 mm (6 in.)					AISI 316 L ss	(Note 1)								5					
150 mm (6 in.)					Hastelloy C-276	(Note 1)								6					
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters																			
AISI 316 L ss					(Note 2)						NACE			SM					
AISI 316 L ss - Low thickness (not for extended diaphragm)					(Note 3)						NACE			SL					
Hastelloy C-276											NACE			HM					
Hastelloy C-276 - Low thickness (not for extended diaphragm)					(Note 3)						NACE			HL					
Hastelloy C-2000 (not for extended diaphragm)					(Note 3)						NACE			MM					
Hastelloy C-2000 diaphragm and body (not for extended diaphragm)					(Note 3)						NACE			ZM					
Inconel 625 (not for extended diaphragm)					(Note 3)						NACE			LM					
Tantalum (not for extended diaphragm)					(Note 3)									TM					
AISI 316 L ss gold plated (not for extended diaphragm)					(Note 3)						NACE			NM					
AISI 316 L ss with PFA anti-stick coating					(Note 2)						NACE			KM					
Hastelloy C-276 with PFA anti-stick coating											NACE			YM					
AISI 316 L ss with PFA coating anti-corrosion and anti-stick					(Note 2)						NACE			WM					
Diaflex (AISI with anti-abrasion treatment)					(Note 2)						NACE			FM					
Superduplex ss (UNS S32750 to ASTM SA479) (not for extended diaphragm)					(Note 3)						NACE			EM					
Monel (not for extended diaphragm)					(Note 3)						NACE			GM					

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26RA			S	2	6	R	A	X	X	X	X	X	X	X	X	X	X	X	X
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character																			
Serrated	(Note 4)	1																	
Smooth	(Note 15)	2																	
<b>Capillary Protection</b> - 14 <sup>th</sup> character																			
AISI 316 L ss armour																			
AISI 316 L ss armour with PVC protective cover																			
Extension tube for direct mount seal	(Note 5)	N																	
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character																			
Direct-mount construction	(Note 6)																		
1 (3)	(Note 7)																		
1.5 (5)	(Note 7)																		
2 (7)	(Note 7)																		
2.5 (8)	(Note 7)																		
3 (10)	(Note 7)																		
3.5 (12)	(Note 7)																		
4 (13)	(Note 7)																		
4.5 (15)	(Note 7)																		
5 (17)	(Note 7)																		
5.5 (18)	(Note 7)																		
6 (20)	(Note 7)																		
6.5 (22)	(Note 7)																		
7 (23.5)	(Note 7)																		
7.5 (25)	(Note 7)																		
8 (27)	(Note 7)																		
9 (30)	(Note 7)																		
10 (33)	(Note 7)																		
12 (40)	(Note 7)																		
14 (47)	(Note 7)																		
16 (53)	(Note 7)																		
<b>Fill Fluid</b> - 16 <sup>th</sup> character																			
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)																		S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)																		P
Inert oil - Galden G5	(Oxygen service)	(Note 8)																	N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 8)																	D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)																		G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)																		C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 9)																	W
Vegetable oil Neobee M-20	(FDA approved)	(Note 9)																	A
Glycerin-water 70%	(FDA approved)	(Note 9)																	B

continued  
see next page

BASIC ORDERING INFORMATION model S26RA			S 2 6 R A X XX X X X X X X X X	X	X	X
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character						
None (TO BE SELECTED FOR EXTENDED VERSIONS)				N		
1 hole - 1/2 in. NPT	(Note 3)			2		
2 holes - 1/2 in. NPT	(Note 3)			3		
1 hole - 1/4 in. NPT	(Note 3)			4		
2 holes - 1/4 in. NPT	(Note 3)			5		
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character						
None	(Note 10)			N		
AISI 316 L ss	(Note 11)	NACE		A		
Hastelloy C-276	(Notes 11, 12)	NACE		H		
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character						
No plug - No gasket						N
No plug - garlock	(Note 11)					A
No plug - PTFE	(Note 11)					B
No plug - graphite	(Note 11)					C
AISI 316 L ss - no gasket	(Notes 11, 13)	NACE				D
AISI 316 L ss - garlock	(Notes 11, 13)	NACE				E
AISI 316 L ss - PTFE	(Notes 11, 13)	NACE				F
AISI 316 L ss - graphite	(Notes 11, 13)	NACE				G
Hastelloy C-276 - no gasket	(Notes 11, 14)	NACE				H
Hastelloy C-276 - garlock	(Notes 11, 14)	NACE				L
Hastelloy C-276 - PTFE	(Notes 11, 14)	NACE				M
Hastelloy C-276 - graphite	(Notes 11, 14)	NACE				P

Note 1: Not available with mounting flange rating code E3, E5, G3, G4, G5  
Note 2: Not available with extensions length and material code 2, 4, 6  
Note 3: Not available with extensions length and material code 1, 2, 3, 4, 5, 6  
Note 4: Not available with diaphragm material code MM, LM, TM, NM, KM, YM, WM  
Note 5: Not available with transmitter side of connection code L  
Note 6: Not available with capillary protection code A, B  
Note 7: Not available with capillary protection code N  
Note 8: Suitable for oxygen service  
Note 9: Suitable for food application  
Note 10: Not available with Flushing ring: hole and thread code 2, 3, 4, 5  
Note 11: Not available with Flushing ring: hole and thread code N  
Note 12: Not available with Seal surface finish code 1  
Note 13: Not available with Hastelloy C-276 flushing ring material code H  
Note 14: Not available with AISI 316 L flushing ring material code A  
Note 15: Not available with diaphragm material code ZM

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model S26RE Rotating flange diaphragm seals (flush and extended) to EN 1092-1

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters					<b>S</b>	<b>2</b>	<b>6</b>	<b>R</b>	<b>E</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Rotating flange diaphragm seal (flush and extended) to EN 1092-1																			
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																			
High pressure side										H									
Low pressure side										L									
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																			
PN 16 - 40 / DN 50											N2								
PN 63 / DN 50											N3								
PN 100 / DN 50											N4								
PN 16 / DN 80											P1								
PN 40 / DN 80											P2								
PN 63 / DN 80											P3								
PN 100 / DN 80											P4								
PN 16 / DN 100											Q1								
PN 40 / DN 100											Q2								
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character																			
Carbon steel												C							
AISI 316 ss												S							
<b>Extensions Length and Material</b> - 10 <sup>th</sup> character																			
Flush													F						
50 mm. (2 in.)					AISI 316 L ss	(Note 1)							1						
50 mm. (2 in.)					Hastelloy C-276	(Note 1)							2						
100 mm. (4 in.)					AISI 316 L ss	(Note 1)							3						
100 mm. (4 in.)					Hastelloy C-276	(Note 1)							4						
150 mm. (6 in.)					AISI 316 L ss	(Note 1)							5						
150 mm. (6 in.)					Hastelloy C-276	(Note 1)							6						
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters																			
AISI 316 L ss					(Note 2)						NACE		SM						
AISI 316 L ss - Low thickness (not for extended diaphragm)					(Note 3)						NACE		SL						
Hastelloy C-276											NACE		HM						
Hastelloy C-276 - Low thickness (not for extended diaphragm)					(Note 3)						NACE		HL						
Hastelloy C-2000 (not for extended diaphragm)					(Note 3)						NACE		MM						
Inconel 625 (not for extended diaphragm)					(Note 3)						NACE		LM						
Tantalum (not for extended diaphragm)					(Note 3)								TM						
AISI 316 L ss gold plated (not for extended diaphragm)					(Note 3)						NACE		NM						
AISI 316 L ss with PFA anti-stick coating					(Note 2)						NACE		KM						
Hastelloy C-276 with PFA anti-stick coating											NACE		YM						
AISI 316 L ss with PFA coating anti-corrosion and anti-stick					(Note 2)						NACE		WM						
Diaflex (AISI with anti-abrasion treatment)					(Note 2)						NACE		FM						
Superduplex ss (UNS S32750 to ASTM SA479) (not for extended diaphragm)					(Note 3)						NACE		EM						
Monel					(Note 3)						NACE		GM						

continued  
see next page

BASIC ORDERING INFORMATION model S26RE				S	2	6	R	E	X	X	X	X	X	X	X	X	X	X
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character																		
Serrated	(Note 4)																	
Smooth																		
<b>Capillary Protection</b> - 14 <sup>th</sup> character																		
AISI 316 L ss armour																		
AISI 316 L ss armour with PVC protective cover																		
Extension tube for direct mount seal	(Note 5)																	
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character																		
Direct-mount construction	(Note 6)																	
1 (3)	(Note 7)																	
1.5 (5)	(Note 7)																	
2 (7)	(Note 7)																	
2.5 (8)	(Note 7)																	
3 (10)	(Note 7)																	
3.5 (12)	(Note 7)																	
4 (13)	(Note 7)																	
4.5 (15)	(Note 7)																	
5 (17)	(Note 7)																	
5.5 (18)	(Note 7)																	
6 (20)	(Note 7)																	
6.5 (22)	(Note 7)																	
7 (23.5)	(Note 7)																	
7.5 (25)	(Note 7)																	
8 (27)	(Note 7)																	
9 (30)	(Note 7)																	
10 (33)	(Note 7)																	
12 (40)	(Note 7)																	
14 (47)	(Note 7)																	
16 (53)	(Note 7)																	
<b>Fill Fluid</b> - 16 <sup>th</sup> character																		
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)																	
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)																	
Inert oil - Galden G5	(Oxygen service)	(Note 8)																
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 8)																
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)																	
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)																	
Mineral oil Esso Marcol 152	(FDA approved)	(Note 9)																
Vegetable oil Neobee M-20	(FDA approved)	(Note 9)																
Glycerin-water 70%	(FDA approved)	(Note 9)																

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26RE			S 2 6 R E X XX X X XX X X X X	X	X	X
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character						
None (TO BE SELECTED FOR EXTENDED VERSIONS)				N		
1 hole - 1/2 in. NPT	(Note 3)			2		
2 holes - 1/2 in. NPT	(Note 3)			3		
1 hole - 1/4 in. NPT	(Note 3)			4		
2 holes - 1/4 in. NPT	(Note 3)			5		
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character						
None	(Note 10)			N		
AISI 316 L ss	(Note 11)	NACE		A		
Hastelloy C-276	(Notes 11, 12)	NACE		H		
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character						
No plug - No gasket						N
No plug - garlock	(Note 11)					A
No plug - PTFE	(Note 11)					B
No plug - graphite	(Note 11)					C
AISI 316 L ss - no gasket	(Notes 11, 13)	NACE				D
AISI 316 L ss - garlock	(Notes 11, 13)	NACE				E
AISI 316 L ss - PTFE	(Notes 11, 13)	NACE				F
AISI 316 L ss - graphite	(Notes 11, 13)	NACE				G
Hastelloy C-276 - no gasket	(Notes 11, 14)	NACE				H
Hastelloy C-276 - garlock	(Notes 11, 14)	NACE				L
Hastelloy C-276 - PTFE	(Notes 11, 14)	NACE				M
Hastelloy C-276 - graphite	(Notes 11, 14)	NACE				P

Note 1: Not available with mounting flange rating code N3, N4, P3, P4  
Note 2: Not available with extensions length and material code 2, 4, 6  
Note 3: Not available with extensions length and material code 1, 2, 3, 4, 5, 6  
Note 4: Not available with diaphragm material code MM, LM, TM, NM, KM, YM, WM  
Note 5: Not available with transmitter side of connection code L  
Note 6: Not available with capillary protection code A, B  
Note 7: Not available with capillary protection code N  
Note 8: Suitable for oxygen service  
Note 9: Suitable for food application  
Note 10: Not available with Flushing ring: hole and thread code 2, 3, 4, 5  
Note 11: Not available with Flushing ring: hole and thread code N  
Note 12: Not available with Seal surface finish code 1  
Note 13: Not available with Hastelloy C-276 flushing ring material code H  
Note 14: Not available with AISI 316 L flushing ring material code A

## BASIC ORDERING INFORMATION model S26RJ Rotating flange diaphragm seals (flush) to JIS

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	R	J	X	XX	X	X	XX	X	X	X	X	X	X	X	X	X
Rotating flange diaphragm seal (flush) to JIS																			
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																			
High pressure side						H													
Low pressure side						L													
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																			
10K / A50							B2												
20K / A50							B4												
40K / A50							B6												
10K / A80							C2												
20K / A80							C4												
40K / A80							C6												
10K / A100							D2												
20K / A100							D4												
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character																			
Carbon steel								C											
AISI 316 ss								S											
<b>Extensions Length</b> - 10 <sup>th</sup> character																			
Flush									F										
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters																			
AISI 316 L ss							NACE			SM									
Hastelloy C-276							NACE			HM									
Hastelloy C-2000							NACE			MM									
Inconel 625							NACE			LM									
Tantalum										TM									
AISI 316 L ss gold plated							NACE			NM									
AISI 316 L ss with PFA anti-stick coating							NACE			KM									
Hastelloy C-276 with PFA anti-stick coating							NACE			YM									
AISI 316 L ss with PFA coating anti-corrosion and anti-stick							NACE			WM									
Superduplex ss (UNS S32750 to ASTM SA479)							NACE			EM									
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character																			
Serrated							(Note 1)				1								
Smooth											2								
<b>Capillary Protection</b> - 14 <sup>th</sup> character																			
AISI 316 L ss armour																		A	
AISI 316 L ss armour with PVC protective cover																		B	
Extension tube for direct mount seal							(Note 2)											N	

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26RJ			S	2	6	R	J	X	XX	X	XX	XX	X	X	X	X	X
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character																	
Direct-mount construction	(Note 3)													1			
1 (3)	(Note 4)													A			
1.5 (5)	(Note 4)													B			
2 (7)	(Note 4)													C			
2.5 (8)	(Note 4)													D			
3 (10)	(Note 4)													E			
3.5 (12)	(Note 4)													F			
4 (13)	(Note 4)													G			
4.5 (15)	(Note 4)													H			
5 (17)	(Note 4)													J			
5.5 (18)	(Note 4)													K			
6 (20)	(Note 4)													L			
6.5 (22)	(Note 4)													M			
7 (23.5)	(Note 4)													N			
7.5 (25)	(Note 4)													P			
8 (27)	(Note 4)													Q			
9 (30)	(Note 4)													R			
10 (33)	(Note 4)													S			
12 (40)	(Note 4)													T			
14 (47)	(Note 4)													U			
16 (53)	(Note 4)													V			
<b>Fill Fluid</b> - 16 <sup>th</sup> character																	
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)													S			
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)													P			
Inert oil - Galden G5	(Oxygen service)	(Note 5)												N			
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 5)												D			
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)													G			
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)													C			
Mineral oil Esso Marcol 152	(FDA approved)	(Note 6)												W			
Vegetable oil Neobee M-20	(FDA approved)	(Note 6)												A			
Glycerin-water 70%	(FDA approved)	(Note 6)												B			
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character																	
None																N	
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character																	
None																N	
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character																	
None																	N

Note 1: Not available with diaphragm material code HM, MM, LM, TN, NM, KM, YM, WM

Note 2: Not available with transmitter side of connection code L

Note 3: Not available with capillary protection code A, B

Note 4: Not available with capillary protection code N

Note 5: Suitable for oxygen service

Note 6: Suitable for food application



## BASIC ORDERING INFORMATION model S26RR Rotating flange diaphragm seals (flush) - Ring Joint

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	<b>S 2 6 R R</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Rotating flange diaphragm seal (flush) Ring Joint to ASME B16.5															
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character															
High pressure side	H														
Low pressure side	L														
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters															
ASME CL 150 / 1 1/2 in.															
ASME CL 300 / 1 1/2 in.															
ASME CL 600 / 1 1/2 in.															
ASME CL 900-1500 / 1 1/2 in.															
ASME CL 2500 / 1 1/2 in.															
ASME CL 150 / 2 in.															
ASME CL 300 / 2 in.															
ASME CL 600 / 2 in.															
ASME CL 900-1500 / 2 in.															
ASME CL 2500 / 2 in.															
ASME CL 150 / 3 in.															
ASME CL 300 / 3 in.															
ASME CL 600 / 3 in.															
ASME CL 900 / 3 in.															
ASME CL 1500 / 3 in.															
ASME CL 2500 / 3 in. (NOT AVAILABLE FOR DIRECT MOUNT SEAL)															
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character															
Carbon steel															
AISI 316 ss															
<b>Extensions Length</b> - 10 <sup>th</sup> character															
Flush															
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters															
AISI 316 L ss															
Hastelloy C-276															
Inconel 625															
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character															
Ring joint															
<b>Capillary Protection</b> - 14 <sup>th</sup> character															
AISI 316 L ss armour															
AISI 316 L ss armour with PVC protective cover															
Extension tube for direct mount seal (Note 1)															

continued  
see next page

Model 266DRH Differential  
Model 266HRH Gauge  
Model 266NRH Absolute

[illegible]

Note 1: Not available with transmitter side of connection code L

Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N

Note 4: Suitable for oxygen service

Note 5: Suitable for food application

## BASIC ORDERING INFORMATION model S26RH Rotating flange diaphragm seals (flush) to ISO 10423 (API standards)

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	R	H	X	XX	X	X	XX	X	X	X	X	X	X	X	X
Rotating flange diaphragm seal (flush) to ISO 10423																		
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																		
High pressure side						H												
Low pressure side						L												
<b>Size / Rating</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																		
ISO 10423 1 13/16 in. / API 10000 (69 MPa)							R1											
ISO 10423 1 13/16 in. / API 15000 (103.5 MPa)							R2											
ISO 10423 2 1/16 in. / API 10000 (69 MPa)							S1											
ISO 10423 2 1/16 in. / API 15000 (103.5 MPa)							S2											
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character																		
AISI 316 ss								S										
<b>Extensions Length</b> - 10 <sup>th</sup> character																		
Flush									F									
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters																		
AISI 316 L ss								NACE		SM								
Hastelloy C-276								NACE		HM								
Inconel 625								NACE		LM								
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character																		
According to ISO 10423											H							
<b>Capillary Protection</b> - 14 <sup>th</sup> character																		
AISI 316 L ss armour																	A	
AISI 316 L ss armour with PVC protective cover																	B	
Extension tube for direct mount seal (Note 1)																	N	

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26RH			S	2	6	R	H	X	XX	X	XX	XX	X	X
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character														
Direct-mount construction		(Note 2)											1	
1 (3)		(Note 3)											A	
1.5 (5)		(Note 3)											B	
2 (7)		(Note 3)											C	
2.5 (8)		(Note 3)											D	
3 (10)		(Note 3)											E	
3.5 (12)		(Note 3)											F	
4 (13)		(Note 3)											G	
4.5 (15)		(Note 3)											H	
5 (17)		(Note 3)											J	
5.5 (18)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											K	
6 (20)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											L	
6.5 (22)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											M	
7 (23.5)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											N	
7.5 (25)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											P	
8 (27)	ONLY AVAILABLE FOR SIZE 2 1/16 in (code S1, S2)	(Note 3)											Q	
<b>Fill Fluid</b> - 16 <sup>th</sup> character														
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)												S	
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)												P	
Inert oil - Galden G5	(Oxygen service)	(Note 4)											N	
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)											D	
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)												G	
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)												C	
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character														
None														N
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character														
None														N
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character														
None														N

Note 1: Not available with transmitter side of connection code L  
Note 2: Not available with capillary protection code A, B  
Note 3: Not available with capillary protection code N  
Note 4: Suitable for oxygen service

## BASIC ORDERING INFORMATION model S26FA Fixed flange diaphragm seals (flush) to ASME B16.5

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	F	A	X	XX	X	X	XX	X	X	X	X
Fixed flange diaphragm seal (flush) to ASME B16.5														
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character						H								
High pressure side						L								
Low pressure side														
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters														
ASME CL 150 / 2 in.							E1							
ASME CL 300 / 2 in.							E2							
ASME CL 600 / 2 in.							E3							
ASME CL 150 / 3 in.							G1							
ASME CL 300 / 3 in.							G2							
ASME CL 600 / 3 in.							G3							
ASME CL 150 / 4 in.							H1							
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character														
AISI 316 L ss								S						
<b>Extensions Length and Material</b> - 10 <sup>th</sup> character														
Flush									F					
50 mm. (2 in.)					AISI 316 L ss				1					
100 mm. (4 in.)					AISI 316 L ss				3					
150 mm. (6 in.)					AISI 316 L ss				5					
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters														
AISI 316 L ss							NACE			SM				
AISI 316 L ss - Low thickness					(Note 1)		NACE			SL				
Hastelloy C-276							NACE			HM				
Hastelloy C-276 - Low thickness					(Note 1)		NACE			HL				
Hastelloy C-2000					(Note 1)		NACE			MM				
Inconel 625					(Note 1)		NACE			LM				

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26FA				S	2	6	F	A	X	X	X	X	X	X	X	X	X	X	X
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character																			
Serrated	(Note 2)									1									
Smooth										2									
<b>Capillary Protection</b> - 14 <sup>th</sup> character																			
AISI 316 L ss armour																			A
AISI 316 L ss armour with PVC protective cover																			B
Extension tube for direct mount seal	(Note 3)																		N
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character																			
Direct-mount construction	(Note 4)																		1
1 (3)	(Note 5)																		A
1.5 (5)	(Note 5)																		B
2 (7)	(Note 5)																		C
2.5 (8)	(Note 5)																		D
3 (10)	(Note 5)																		E
3.5 (12)	(Note 5)																		F
4 (13)	(Note 5)																		G
4.5 (15)	(Note 5)																		H
5 (17)	(Note 5)																		J
5.5 (18)	(Note 5)																		K
6 (20)	(Note 5)																		L
6.5 (22)	(Note 5)																		M
7 (23.5)	(Note 5)																		N
7.5 (25)	(Note 5)																		P
8 (27)	(Note 5)																		Q
9 (30)	(Note 5)																		R
10 (33)	(Note 5)																		S
12 (40)	(Note 5)																		T
14 (47)	(Notes 1, 5)																		U
16 (53)	(Notes 1, 5)																		V
<b>Fill Fluid</b> - 16 <sup>th</sup> character																			
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)																		S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)																		P
Inert oil - Galden G5	(Oxygen service)	(Note 6)																	N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 6)																	D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)																		G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)																		C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 7)																	W
Vegetable oil Neobee M-20	(FDA approved)	(Note 7)																	A
Glycerin-water 70%	(FDA approved)	(Note 7)																	B

continued  
see next page

BASIC ORDERING INFORMATION model S26FA			S 2 6 F A X XX X X XX X X X X	X	X	X
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character						
None				N		
1 hole - 1/2 in. NPT	(Note 1)			2		
2 holes - 1/2 in. NPT	(Note 1)			3		
1 hole - 1/4 in. NPT	(Note 1)			4		
2 holes - 1/4 in. NPT	(Note 1)			5		
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character						
None	(Note 8)				N	
AISI 316 L ss	(Note 9)	NACE			A	
Hastelloy C-276	(Notes 9, 10)	NACE			H	
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character						
No plug - No gasket						N
No plug - garlock	(Note 9)					A
No plug - PTFE	(Note 9)					B
No plug - graphite	(Note 9)					C
AISI 316 L ss - no gasket	(Notes 9, 11)	NACE				D
AISI 316 L ss - garlock	(Notes 9, 11)	NACE				E
AISI 316 L ss - PTFE	(Notes 9, 11)	NACE				F
AISI 316 L ss - graphite	(Notes 9, 11)	NACE				G
Hastelloy C-276 - no gasket	(Notes 9, 12)	NACE				H
Hastelloy C-276 - garlock	(Notes 9, 12)	NACE				L
Hastelloy C-276 - PTFE	(Notes 9, 12)	NACE				M
Hastelloy C-276 - graphite	(Notes 9, 12)	NACE				P

Note 1: Not available with extensions length and material code 1, 3, 5  
 Note 2: Not available with diaphragm material code MM, LM  
 Note 3: Not available with transmitter side of connection code L  
 Note 4: Not available with capillary protection code A, B  
 Note 5: Not available with capillary protection code N  
 Note 6: Suitable for oxygen service  
 Note 7: Suitable for food application  
 Note 8: Not available with Flushing ring: hole and thread code 2, 3, 4, 5  
 Note 9: Not available with Flushing ring: hole and thread code N  
 Note 10: Not available with Seal surface finish code 1  
 Note 11: Not available with Hastelloy C-276 flushing ring material code H  
 Note 12: Not available with AISI 316 L flushing ring material code A

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model S26FE Fixed flange diaphragm seals (flush) to EN 1092-1

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	<b>S 2 6 F E</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Fixed flange diaphragm seal (flush) to EN 1092-1													
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character													
High pressure side		H											
Low pressure side		L											
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters													
PN 16 / DN 50			N1										
PN 40 / DN 50			N2										
PN 63 / DN 50			N3										
PN 100 / DN 50			N4										
PN 16 / DN 80			P1										
PN 40 / DN 80			P2										
PN 63 / DN 80			P3										
PN 100 / DN 80			P4										
PN 16 / DN 100			Q1										
<b>Mounting Flange Material</b> - 9 <sup>th</sup> character													
AISI 316 L ss						S							
<b>Extensions Length</b> - 10 <sup>th</sup> character													
Flush							F						
50 mm. (2 in.)	AISI 316 L ss						1						
100 mm. (4 in.)	AISI 316 L ss						3						
150 mm. (6 in.)	AISI 316 L ss						5						
<b>Diaphragm Material</b> - 11 <sup>th</sup> and 12 <sup>th</sup> characters													
AISI 316 L ss			NACE				SM						
AISI 316 L ss - Low thickness (not for extended diaphragm)	(Note 1)		NACE				SL						
Hastelloy C-276			NACE				HM						
Hastelloy C-276 - Low thickness (not for extended diaphragm)	(Note 1)		NACE				HL						
Hastelloy C-2000 (not for extended diaphragm)	(Note 1)		NACE				MM						
Inconel 625 (not for extended diaphragm)	(Note 1)		NACE				LM						

continued  
see next page



BASIC ORDERING INFORMATION model S26FE			S	2	6	F	E	X	X	X	X	X	X	X	X	X	X	X
<b>Seal Surface Finish</b> - 13 <sup>th</sup> character																		
Serrated	(Note 2)																	
Smooth																		
Form E - Spigot type	(Notes 1, 3)																	
Form D - Groove type	(Notes 1, 3, 4)																	
<b>Capillary Protection</b> - 14 <sup>th</sup> character																		
AISI 316 L ss armour																		
AISI 316 L ss armour with PVC protective cover																		
Extension tube for direct mount seal	(Note 5)																	
<b>Capillary Length m (Feet)</b> - 15 <sup>th</sup> character																		
Direct-mount construction	(Note 6)																	
1 (3)	(Note 7)																	
1.5 (5)	(Note 7)																	
2 (7)	(Note 7)																	
2.5 (8)	(Note 7)																	
3 (10)	(Note 7)																	
3.5 (12)	(Note 7)																	
4 (13)	(Note 7)																	
4.5 (15)	(Note 7)																	
5 (17)	(Note 7)																	
5.5 (18)	(Note 7)																	
6 (20)	(Note 7)																	
6.5 (22)	(Note 7)																	
7 (23.5)	(Note 7)																	
7.5 (25)	(Note 7)																	
8 (27)	(Note 7)																	
9 (30)	(Note 7)																	
10 (33)	(Note 7)																	
12 (40)	(Note 7)																	
14 (47)	(Notes 1, 7)																	
16 (53)	(Notes 1, 7)																	
<b>Fill Fluid</b> - 16 <sup>th</sup> character																		
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)																	
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)																	
Inert oil - Galden G5	(Oxygen service)	(Note 8)																
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 8)																
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)																	
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)																	
Mineral oil Esso Marcol 152	(FDA approved)	(Note 9)																
Vegetable oil Neobee M-20	(FDA approved)	(Note 9)																
Glycerin-water 70%	(FDA approved)	(Note 9)																

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26FE			S 2 6 F E X XX X X XX X X X X	X	X	X
<b>Flushing Ring: Hole and Thread</b> - 17 <sup>th</sup> character						
None				N		
1 hole - 1/2 in. NPT	(Notes 1, 10)			2		
2 holes - 1/2 in. NPT	(Notes 1, 10)			3		
1 hole - 1/4 in. NPT	(Notes 1, 10)			4		
2 holes - 1/4 in. NPT	(Notes 1, 10)			5		
<b>Flushing Ring Material</b> - 18 <sup>th</sup> character						
None	(Note 11)				N	
AISI 316 L ss	(Note 12)	NACE			A	
Hastelloy C-276	(Notes 12, 13)	NACE			H	
<b>Flushing Ring: Plug and Gasket</b> - 19 <sup>th</sup> character						
No plug - No gasket						N
No plug - garlock	(Note 12)					A
No plug - PTFE	(Note 12)					B
No plug - graphite	(Note 12)					C
AISI 316 L ss - no gasket	(Notes 12, 14)	NACE				D
AISI 316 L ss - garlock	(Notes 12, 14)	NACE				E
AISI 316 L ss - PTFE	(Notes 12, 14)	NACE				F
AISI 316 L ss - graphite	(Notes 12, 14)	NACE				G
Hastelloy C-276 - no gasket	(Notes 12, 15)	NACE				H
Hastelloy C-276 - garlock	(Notes 12, 15)	NACE				L
Hastelloy C-276 - PTFE	(Notes 12, 15)	NACE				M
Hastelloy C-276 - graphite	(Notes 12, 15)	NACE				P

Note 1: Not available with extensions length and material code 1, 3, 5  
Note 2: Not available with diaphragm material code MM, LM  
Note 3: Not available with DN 100 size code Q1  
Note 4: Not available with diaphragm material code HM, HL, MM, LM  
Note 5: Not available with transmitter side of connection code L  
Note 6: Not available with capillary protection code A, B  
Note 7: Not available with capillary protection code N  
Note 8: Suitable for oxygen service  
Note 9: Suitable for food application  
Note 10: Not available with Seal surface finish code 4, 6  
Note 11: Not available with Flushing ring: hole and thread code 2, 3, 4, 5  
Note 12: Not available with Flushing ring: hole and thread code N  
Note 13: Not available with Seal surface finish code 1  
Note 14: Not available with Hastelloy C-276 flushing ring material code H  
Note 15: Not available with AISI 316 L flushing ring material code A

## BASIC ORDERING INFORMATION model S26MA Off-line flange diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters					S	2	6	M	A	X	XX	X	XX	X	X	X	X	X
Off-line flange diaphragm seal to ASME B16.5																		
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																		
High pressure side										H								
Low pressure side										L								
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																		
ASME CL 150 / 1/2 in.											A1							
ASME CL 300 / 1/2 in.											A2							
ASME CL 150 / 1 in.											C1							
ASME CL 300 / 1 in.											C2							
ASME CL 150 / 1 1/2 in.											D1							
ASME CL 300 / 1 1/2 in.											D2							
<b>Mounting Flange Material / Seat Form</b> - 9 <sup>th</sup> character																		
AISI 316 L ss / Form RF (raised face) - serrated finish					NACE	(Note 6)					S							
Hastelloy C-276 / Form RF (raised face) - serrated finish					NACE	(Note 6)					H							
Hastelloy C-2000 / Form RF (raised face) - serrated finish					NACE	(Note 7)					Y							
<b>Diaphragm Material</b> - 10 <sup>th</sup> and 11 <sup>th</sup> characters																		
AISI 316 L ss					NACE									SM				
Hastelloy C-276					NACE									HM				
Hastelloy C-2000					NACE									MM				
Hastelloy C-2000 diaphragm and body					NACE									ZM				
Inconel 625					NACE									LM				
Tantalum														TM				
AISI 316 L ss gold plated					NACE									NM				
<b>Capillary Protection</b> - 12 <sup>th</sup> character																		
AISI 316 L ss armour															A			
AISI 316 L ss armour with PVC protective cover															B			
Extension tube for direct mount seal (Note 1)															N			

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26MA			S 2 6 M A X XX X XX X	X	X	X	X
<b>Capillary Length m (Feet)</b> - 13 <sup>th</sup> character							
Direct-mount construction	(Note 2)		1				
1 (3)	(Note 3)		A				
1.5 (5)	(Note 3)		B				
2 (7)	(Note 3)		C				
2.5 (8)	(Note 3)		D				
3 (10)	(Note 3)		E				
3.5 (12)	(Note 3)		F				
4 (13)	(Note 3)		G				
4.5 (15)	(Note 3)		H				
5 (17)	(Note 3)		J				
5.5 (18)	(Note 3)		K				
6 (20)	(Note 3)		L				
6.5 (22)	(Note 3)		M				
7 (23.5)	(Note 3)		N				
7.5 (25)	(Note 3)		P				
8 (27)	(Note 3)		Q				
9 (30)	(Note 3)		R				
10 (33)	(Note 3)		S				
12 (40)	(Note 3)		T				
<b>Fill Fluid</b> - 14 <sup>th</sup> character							
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)				S		
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)				P		
Inert oil - Galden G5	(Oxygen service)	(Note 4)			N		
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)			D		
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)				G		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)				C		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)			W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)			A		
Glycerin-water 70%	(FDA approved)	(Note 5)			B		
<b>Flushing Connections</b> - 15 <sup>th</sup> character							
Not required						1	
Provided (with 2 plugs supplied)						Q	
<b>Gasket</b> - 16 <sup>th</sup> character							
PTFE							2
Viton®	(Note 6)						3
Graphite	(Note 6)						7

Note 1: Not available with transmitter side of connection code L

Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N

Note 4: Suitable for oxygen service

Note 5: Suitable for food application

Note 6: Not available with diaphragm material code ZM

Note 7: Not available with diaphragm material code SM, HM, MM, LM, TM, NM

## BASIC ORDERING INFORMATION model S26ME Off-line flange diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters					<b>S</b>	<b>2</b>	<b>6</b>	<b>M</b>	<b>E</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Off-line flange diaphragm seal to EN 1092-1																		
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																		
High pressure side										H								
Low pressure side										L								
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																		
PN 16 - 40 / DN 25											L2							
PN 16 - 40 / DN 40											M2							
<b>Mounting Flange Material / Seat Form</b> - 9 <sup>th</sup> character																		
AISI 316 L ss / Form B1 - serrated finish					NACE							S						
Hastelloy C-276 / Form B1 - serrated finish					NACE							H						
<b>Diaphragm Material</b> - 10 <sup>th</sup> and 11 <sup>th</sup> characters																		
AISI 316 L ss					NACE								SM					
Hastelloy C-276					NACE								HM					
Hastelloy C-2000					NACE								MM					
Inconel 625					NACE								LM					
Tantalum													TM					
AISI 316 L ss gold plated					NACE								NM					
<b>Capillary Protection</b> - 12 <sup>th</sup> character																		
AISI 316 L ss armour														A				
AISI 316 L ss armour with PVC protective cover														B				
Extension tube for direct mount seal (Note 1)														N				

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26ME			S 2 6 M E X XX X XX X	X	X	X	X
<b>Capillary Length m (Feet)</b> - 13 <sup>th</sup> character							
Direct-mount construction	(Note 2)		1				
1 (3)	(Note 3)		A				
1.5 (5)	(Note 3)		B				
2 (7)	(Note 3)		C				
2.5 (8)	(Note 3)		D				
3 (10)	(Note 3)		E				
3.5 (12)	(Note 3)		F				
4 (13)	(Note 3)		G				
4.5 (15)	(Note 3)		H				
5 (17)	(Note 3)		J				
5.5 (18)	(Note 3)		K				
6 (20)	(Note 3)		L				
6.5 (22)	(Note 3)		M				
7 (23.5)	(Note 3)		N				
7.5 (25)	(Note 3)		P				
8 (27)	(Note 3)		Q				
9 (30)	(Note 3)		R				
10 (33)	(Note 3)		S				
12 (40)	(Note 3)		T				
<b>Fill Fluid</b> - 14 <sup>th</sup> character							
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)				S		
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)				P		
Inert oil - Galden G5	(Oxygen service)	(Note 4)			N		
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)			D		
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)				G		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)				C		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)			W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)			A		
Glycerin-water 70%	(FDA approved)	(Note 5)			B		
<b>Flushing Connections</b> - 15 <sup>th</sup> character							
Not required						1	
Provided (with 2 plugs supplied)						Q	
<b>Gasket</b> - 16 <sup>th</sup> character							
PTFE							2
Viton®							3
Graphite							7

Note 1: Not available with transmitter side of connection code L

Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N

Note 4: Suitable for oxygen service

Note 5: Suitable for food application

## BASIC ORDERING INFORMATION model S26TT Off-line threaded diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

BASE MODEL - 1 <sup>st</sup> to 5 <sup>th</sup> characters					S	2	6	T	T	X	X	X	X	XX	X	X	X	X	X
Off-line threaded diaphragm seal																			
Transmitter Side of Connection - 6 <sup>th</sup> character																			
High pressure side										H									
Low pressure side										L									
Size - 7 <sup>th</sup> character																			
1/4 in. NPT-f												1							
1/2 in. NPT-f												2							
3/4 in. NPT-f												3							
1 in. NPT-f												4							
1 1/2 in. NPT-f												5							
Bolts material - 8 <sup>th</sup> character																			
AISI 316 ss													1						
Carbon steel													2						
Alloy steel													3						
Mounting Flange Material - 9 <sup>th</sup> character																			
AISI 316 L ss															S				
Hastelloy C-276															H				
Diaphragm Material - 10 <sup>th</sup> and 11 <sup>th</sup> characters																			
AISI 316 L ss																		SM	
Hastelloy C-276																		HM	
Hastelloy C-2000																		MM	
Inconel 625																		LM	
Tantalum																		TM	
AISI 316 L ss gold plated																		NM	
Capillary Protection - 12 <sup>th</sup> character																			
AISI 316 L ss armour																			A
AISI 316 L ss armour with PVC protective cover																			B
Extension tube for direct mount seal																			N

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26TT			S 2 6 T T X XX X XX X	X	X	X	X
<b>Capillary Length m (Feet)</b> - 13 <sup>th</sup> character							
Direct-mount construction	(Note 2)			1			
1 (3)	(Note 3)			A			
1.5 (5)	(Note 3)			B			
2 (7)	(Note 3)			C			
2.5 (8)	(Note 3)			D			
3 (10)	(Note 3)			E			
3.5 (12)	(Note 3)			F			
4 (13)	(Note 3)			G			
4.5 (15)	(Note 3)			H			
5 (17)	(Note 3)			J			
5.5 (18)	(Note 3)			K			
6 (20)	(Note 3)			L			
6.5 (22)	(Note 3)			M			
7 (23.5)	(Note 3)			N			
7.5 (25)	(Note 3)			P			
8 (27)	(Note 3)			Q			
9 (30)	(Note 3)			R			
10 (33)	(Note 3)			S			
12 (40)	(Note 3)			T			
<b>Fill Fluid</b> - 14 <sup>th</sup> character							
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)				S		
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)				P		
Inert oil - Galden G5	(Oxygen service)	(Note 4)			N		
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)			D		
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)				G		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)				C		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)			W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)			A		
Glycerin-water 70%	(FDA approved)	(Note 5)			B		
<b>Flushing Connections</b> - 15 <sup>th</sup> character							
Not required						1	
Provided (with 2 plugs supplied)	(Note 6)					Q	
<b>Gasket</b> - 16 <sup>th</sup> character							
PTFE							2
Viton®							3
Graphite							7

Note 1: Not available with transmitter side of connection code L  
Note 2: Not available with capillary protection code A, B  
Note 3: Not available with capillary protection code N  
Note 4: Suitable for oxygen service  
Note 5: Suitable for food application  
Note 6: Not available with size code 5



## BASIC ORDERING INFORMATION model S26SS Sanitary and food diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters		<b>S 2 6 S S</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Sanitary and food diaphragm seal											
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character											
High pressure side			H								
Low pressure side			L								
<b>Mounting connection</b> - 7 <sup>th</sup> character											
Union nut DIN 11851 – F50 (not 3-A authorized)				A							
Union nut DIN 11851 – F80 (not 3-A authorized)				B							
2 in. Triclamp				F							
3 in. Triclamp				G							
4 in. Triclamp				H							
2 in. Cherry Burrell				L							
3 in. Cherry Burrell				M							
4 in. Cherry Burrell				N							
4 in. Sanitary flush diaphragm				P							
4 in. Sanitary extended (2 in.) diaphragm				Q							
4 in. Sanitary extended (4 in.) diaphragm				R							
4 in. Sanitary extended (6 in.) diaphragm				S							
4in Cherry Burrell aseptic - ONLY REMOTE MOUNT				W							
4in aseptic flanged connection - ONLY REMOTE MOUNT				J							
Beverage application bolted seal (not 3-A authorized) - ONLY DIRECT MOUNT WITH 266HDH, 266NDH				T							
<b>Diaphragm Material</b> - 8 <sup>th</sup> and 9 <sup>th</sup> characters											
AISI 316 L ss						SM					
<b>Capillary Protection</b> - 10 <sup>th</sup> character											
AISI 316 L ss armour (Note 1)							A				
AISI 316 L ss armour with PVC protective cover (Note 1)							B				
Extension tube for direct mount seal (Note 2)							N				
<b>Capillary Length m (Feet)</b> - 11 <sup>th</sup> character											
Direct-mount construction (Note 3)								1			
1 (3) (Note 4)								A			
1.5 (5) (Note 4)								B			
2 (7) (Note 4)								C			
2.5 (8) (Note 4)								D			
3 (10) (Note 4)								E			
3.5 (12) (Note 4)								F			
4 (13) (Note 4)								G			
4.5 (15) (Note 4)								H			
5 (17) (Note 4)								J			
5.5 (18) (Note 4)								K			
6 (20) (Note 4)								L			
6.5 (22) (Note 4)								M			
7 (23.5) (Note 4)								N			
7.5 (25) (Note 4)								P			
8 (27) (Note 4)								Q			
9 (30) (Note 4)								R			
10 (33) (Note 4)								S			

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26SS			S 2 6 S S X X X X X X	X	X	X
<b>Fill Fluid</b> - 12 <sup>th</sup> character						
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)			S		
Inert oil - Halocarbon 4.2	(-40 to 250 °C; -40 to 480 °F)	(Note 5)		D		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)			C		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 6)		W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 6)		A		
Glycerin-water 70%	(FDA approved)	(Note 6)		B		
<b>Clamp/Fittings</b> - 13 <sup>th</sup> character						
None					1	
2 in. V-band Clamp (for 2 in. Triclamp)					A	
3 in. V-band Clamp (for 3 in. Triclamp)					B	
4 in. V-band Clamp (for 4 in. Triclamp, 4 in. Cherry Burrell, 4 in. Sanitary flush and 4 in. aseptic flanged)					C	
4 in. Tank spud, tank wall up to 4.7mm (0.18) and 4 in. V-band Clamp (for 4 in. Sanitary flush seal)					D	
4 in. Tank spud, tank wall up to 9.5mm (0.37) and 4 in. V-band Clamp (for 4 in. Sanitary flush seal)					E	
4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended seal)					F	
Tank spud for 2 in. extension and 4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended 2 in. seal)					G	
Tank spud for 4 in. extension and 4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended 4 in. seal)					H	
Tank spud for 6 in. extension and 4 in. schedule 5 V-band clamp (for 4 in. Sanitary extended 6 in. seal)					J	
Aseptic tank spud (for 4 in. aseptic flanged seal)					P	
Flanged tank spud with 6 holes (for 1 1/2 in. beverage seal)					K	
<b>Gasket</b> - 14 <sup>th</sup> character						
None						1
Ethylene propylene gasket DN100 (for 4 in. Sanitary extended seal) - (EPDM 3-A 18-03 Class II)						A
Ethylene propylene gasket (for 1 1/2 in. beverage seal)						B
Ethylene propylene gasket DN50 (for F50 Union nut seal)						C
Ethylene propylene gasket DN80 (for F80 Union nut seal)						D
Ethylene propylene gasket (for 4 in. Sanitary flush and 4 in. aseptic) - (EPDM 3-A 18-03 Class II)						G

Note 1: Not available with beverage bolted seal connection code T

Note 2: Not available with transmitter side of connection code L

Note 3: Not available with capillary protection code A, B

Note 4: Not available with capillary protection code N

Note 5: Suitable for oxygen service

Note 6: Suitable for food application

## BASIC ORDERING INFORMATION model S26VN Socket and saddle diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters					<b>S 2 6 V N</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Socket and saddle diaphragm seal												
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character												
High pressure side						H						
Low pressure side						L						
<b>Diaphragm Material</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters												
AISI 316 L ss					NACE		SM					
Hastelloy C-276					NACE		HM					
Hastelloy C-2000					NACE		MM					
Inconel 625					NACE		LM					
Tantalum							TM					
AISI 316 L ss gold plated					NACE		NM					
Superduplex ss (UNS S32750 to ASTM SA479)					NACE		EM					
<b>Capillary Protection</b> - 9 <sup>th</sup> character												
AISI 316 L ss armour								A				
AISI 316 L ss armour with PVC protective cover								B				
Extension tube for direct mount seal (Note 1)								N				

continued  
see next page

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26VN			S 2 6 V N X X X X	X	X	X	X
<b>Capillary Length m (Feet)</b> - 10 <sup>th</sup> character							
Direct-mount construction	(Note 2)		1				
1 (3)	(Note 3)		A				
1.5 (5)	(Note 3)		B				
2 (7)	(Note 3)		C				
2.5 (8)	(Note 3)		D				
3 (10)	(Note 3)		E				
3.5 (12)	(Note 3)		F				
4 (13)	(Note 3)		G				
4.5 (15)	(Note 3)		H				
5 (17)	(Note 3)		J				
<b>Fill Fluid</b> - 11 <sup>th</sup> character							
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)				S		
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)				P		
Inert oil - Galden G5	(Oxygen service)	(Note 4)			N		
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 4)			D		
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)				G		
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)				C		
Mineral oil Esso Marcol 152	(FDA approved)	(Note 5)			W		
Vegetable oil Neobee M-20	(FDA approved)	(Note 5)			A		
Glycerin-water 70%	(FDA approved)	(Note 5)			B		
<b>Process Fitting Connections</b> - 12 <sup>th</sup> character							
Not required						N	
Saddle 2 in.						1	
Saddle 2 1/2 in.						2	
Saddle 3 in.						3	
Saddle 4 in.						4	
Saddle 5 in.						5	
Saddle 6 in.						6	
Socket 1/2 in.						A	
Socket 3/4 in.						B	
Socket 1 in.						C	
Socket 1 1/2 in.						D	
Socket 2 in.						E	
<b>Gasket</b> - 13 <sup>th</sup> character							
PTFE							2
Graphite							7

Note 1: Not available with transmitter side of connection code L

Note 2: Not available with capillary protection code A, B

Note 3: Not available with capillary protection code N

Note 4: Suitable for oxygen service

Note 5: Suitable for food application

## BASIC ORDERING INFORMATION model S26WA Wafer diaphragm seal to ASME B16.5

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S	2	6	W	A	X	XX	X	XX	X	X	X	X	X
Wafer diaphragm seal to ASME B16.5														
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character														
High pressure side						H								
Low pressure side						L								
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters														
ASME 1 1/2 in.							D5							
ASME 2 in.							E5							
ASME 3 in.							G5							
<b>Extensions Length and Material</b> - 9 <sup>th</sup> character														
Flush								F						
<b>Diaphragm Material</b> - 10 <sup>th</sup> and 11 <sup>th</sup> characters														
AISI 316 L ss						NACE			SM					
AISI 316 L ss - Low thickness						NACE			SL					
Hastelloy C-276						NACE			HM					
Hastelloy C-276 - Low thickness						NACE			HL					
Hastelloy C-2000						NACE			MM					
Inconel 625						NACE			LM					
Tantalum									TM					
AISI 316 L ss gold plated						NACE			NM					
AISI 316 L ss with PFA anti-stick coating						NACE			KM					
Hastelloy C-276 with PFA anti-stick coating						NACE			YM					
AISI 316 L ss with PFA coating anti-corrosion and anti-stick						NACE			WM					
Diaflex (AISI with anti-abrasion treatment)						NACE			FM					
Superduplex ss (UNS S32750 to ASTM SA479)						NACE			EM					
Monel						NACE			GM					
<b>Seal Surface Finish</b> - 12 <sup>th</sup> character														
Serrated						(Note 1)				1				
Smooth										2				
<b>Capillary Protection</b> - 13 <sup>th</sup> character														
AISI 316 L ss armour													A	
AISI 316 L ss armour with PVC protective cover													B	

continued  
see next page

Model 266DRH Differential  
Model 266HRH Gauge  
Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26WA										S	2	6	W	A	X	XX	X	XX	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
--	--	--	--	--	--	--	--	--	--	---	---	---	---	---	---	----	---	----	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Note 1: Not available with diaphragm material code MM, LM, TM, NM, KM, YM, WM  
 Note 2: Suitable for oxygen service  
 Note 3: Suitable for food application  
 Note 4: Not available with Flushing ring: hole and thread code 2, 3, 4, 5  
 Note 5: Not available with Flushing ring: hole and thread code N  
 Note 6: Not available with Seal surface finish code 1  
 Note 7: Not available with Hastelloy C-276 flushing ring material code H  
 Note 8: Not available with AISI 316 L flushing ring material code A

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model S26WE Wafer diaphragm seal to EN 1092-1

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters					S	2	6	W	E	X	XX	X	XX	X	X	X	X	X
Wafer diaphragm seal to EN 1092-1																		
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character																		
High pressure side										H								
Low pressure side										L								
<b>Mounting Flange Rating / Size</b> - 7 <sup>th</sup> and 8 <sup>th</sup> characters																		
EN 1092-1 DN 40											M5							
EN 1092-1 DN 50											N5							
EN 1092-1 DN 80											P5							
<b>Extensions Length and Material</b> - 9 <sup>th</sup> character																		
Flush												F						
<b>Diaphragm Material</b> - 10 <sup>th</sup> and 11 <sup>th</sup> characters																		
AISI 316 L ss										NACE			SM					
AISI 316 L ss - Low thickness										NACE			SL					
Hastelloy C-276										NACE			HM					
Hastelloy C-276 - Low thickness										NACE			HL					
Hastelloy C-2000										NACE			MM					
Inconel 625										NACE			LM					
Tantalum													TM					
AISI 316 L ss gold plated										NACE			NM					
AISI 316 L ss with PFA anti-stick coating										NACE			KM					
Hastelloy C-276 with PFA anti-stick coating										NACE			YM					
AISI 316 L ss with PFA coating anti-corrosion and anti-stick										NACE			WM					
Diaflex (AISI with anti-abrasion treatment)										NACE			FM					
Superduplex ss (UNS S32750 to ASTM SA479)										NACE			EM					
Monel										NACE			GM					
<b>Seal Surface Finish</b> - 12 <sup>th</sup> character																		
Serrated																	1	
Smooth																	2	
Form E - Spigot type																	4	
Form D - Groove type																	6	
<b>Capillary Protection</b> - 13 <sup>th</sup> character																		
AISI 316 L ss armour																	A	
AISI 316 L ss armour with PVC protective cover																	B	

continued  
see next page



BASIC ORDERING INFORMATION model S26WE					S	2	6	W	E	X	XX	X	XX	X	X	X	X	X	X
Capillary Length m (Feet) - 14 <sup>th</sup> character																			
1 (3)															A	continued see next page			
1.5 (5)															B				
2 (7)															C				
2.5 (8)															D				
3 (10)															E				
3.5 (12)															F				
4 (13)															G				
4.5 (15)															H				
5 (17)															J				
5.5 (18)															K				
6 (20)															L				
6.5 (22)															M				
7 (23.5)															N				
7.5 (25)															P				
8 (27)															Q				
9 (30)															R				
10 (33)															S				
12 (40)															T				
14 (47)															U				
16 (53)															V				
Fill Fluid - 15 <sup>th</sup> character																			
Silicone oil PMX 200 10 cSt					(-40 to 250 °C; -40 to 480 °F)					S									
Silicone oil Baysilone PD5 5 cSt					(-85 to 250 °C; -121 to 480 °F)					P									
Inert oil - Galden G5					(Oxygen service)					(Note 4)					N				
Inert oil - Halocarbon 4.2					(Oxygen service)					(Note 4)					D				
Silicone oil for high temperature					(-10 to 375 °C; 14 to 707 °F)					G									
Silicone polymer Syltherm XLT					(-100 to 100 °C; -148 to 212 °F)					C									
Mineral oil Esso Marcol 152					(FDA approved)					(Note 5)					W				
Vegetable oil Neobee M-20					(FDA approved)					(Note 5)					A				
Glycerin-water 70%					(FDA approved)					(Note 5)					B				

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

BASIC ORDERING INFORMATION model S26WE			S 2 6 W E X XX X XX X X X X	X	X	X
<b>Flushing Ring: Hole and Thread</b> - 16 <sup>th</sup> character						
None				N		
1 hole - 1/2 in. NPT	(Note 6)			2		
2 holes - 1/2 in. NPT	(Note 6)			3		
1 hole - 1/4 in. NPT	(Note 6)			4		
2 holes - 1/4 in. NPT	(Note 6)			5		
<b>Flushing Ring Material</b> - 17 <sup>th</sup> character						
None	(Note 7)				N	
AISI 316 L ss	(Note 8)	NACE			A	
Hastelloy C-276	(Notes 8, 9)	NACE			H	
<b>Flushing Ring: Plug and Gasket</b> - 18 <sup>th</sup> character						
No plug - No gasket						N
No plug - garlock	(Note 8)					A
No plug - PTFE	(Note 8)					B
No plug - graphite	(Note 8)					C
AISI 316 L ss - no gasket	(Notes 8, 10)	NACE				D
AISI 316 L ss - garlock	(Notes 8, 10)	NACE				E
AISI 316 L ss - PTFE	(Notes 8, 10)	NACE				F
AISI 316 L ss - graphite	(Notes 8, 10)	NACE				G
Hastelloy C-276 - no gasket	(Notes 8, 11)	NACE				H
Hastelloy C-276 - garlock	(Notes 8, 11)	NACE				L
Hastelloy C-276 - PTFE	(Notes 8, 11)	NACE				M
Hastelloy C-276 - graphite	(Notes 8, 11)	NACE				P

Note 1: Not available with diaphragm material code MM, LM, TM, NM, KM, YM, WM

Note 2: Not available with diaphragm material code SM, HM, MM, LM, TM, NM, KM, YM, WM, FM, EM

Note 3: Not available with diaphragm material code SM, HM, HL, MM, LM, TM, NM, KM, YM, WM, FM, EM

Note 4: Suitable for oxygen service

Note 5: Suitable for food application

Note 6: Not available with Seal surface finish code 4, 6

Note 7: Not available with Flushing ring: hole and thread code 2, 3, 4, 5

Note 8: Not available with Flushing ring: hole and thread code N

Note 9: Not available with Seal surface finish code 1

Note 10: Not available with Hastelloy C-276 flushing ring material code H

Note 11: Not available with AISI 316 L flushing ring material code A

## BASIC ORDERING INFORMATION model S26CN Chemical Tee diaphragm seal

Select one character or set of characters from each category and specify complete catalog number.

BASE MODEL - 1 <sup>st</sup> to 5 <sup>th</sup> characters					S	2	6	C	N	X	XX	XX	X	X	X	X
Chemical Tee seal																
Transmitter Side of Connection - 6 <sup>th</sup> character																
High pressure side										H						
Low pressure side										L						
Mounting Flange Rating / Size - 7 <sup>th</sup> and 8 <sup>th</sup> characters																
Integral with seal / 3 in. Proprietary											GP					
Diaphragm Material - 9 <sup>th</sup> and 10 <sup>th</sup> characters																
AISI 316 L ss									NACE			SM				
Hastelloy C-276									NACE			HM				
AISI 316 L ss with PFA anti-stick coating									NACE			KM				
Hastelloy C-276 with PFA anti-stick coating									NACE			YM				
AISI 316 L ss with PFA coating anti-corrosion and anti-stick									NACE			WM				
Diaflex (AISI with anti-abrasion treatment)									NACE			FM				
Capillary Protection - 11 <sup>th</sup> character																
AISI 316 L ss armour														A		
AISI 316 L ss armour with PVC protective cover														B		
Capillary Length m (Feet) - 12 <sup>th</sup> character																
1 (3)															A	
1.5 (5)															B	
2 (7)															C	
2.5 (8)															D	
3 (10)															E	
3.5 (12)															F	
4 (13)															G	
4.5 (15)															H	
5 (17)															J	
6 (20)															L	
7 (23.5)															N	
8 (27)															Q	
Fill Fluid - 13 <sup>th</sup> character																
Silicone oil PMX 200 10 cSt																S
Silicone oil Baysilone PD5 5 cSt																P
Inert oil - Galden G5										(Oxygen service)	(Note 1)					N
Inert oil - Halocarbon 4.2										(Oxygen service)	(Note 1)					D
Silicone oil for high temperature																G
Silicone polymer Syltherm XLT																C
Mineral oil Esso Marcol 152										(FDA approved)	(Note 2)					W
Vegetable oil Neobee M-20										(FDA approved)	(Note 2)					A
Glycerin-water 70%										(FDA approved)	(Note 2)					B
Gasket - 14 <sup>th</sup> character																
None																1
PTFE with silica filler																6
Graphite																7

Note 1: Suitable for oxygen service  
Note 2: Suitable for food application

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model S26BN Button type remote diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	S 2 6 B N	X	X	X	XX	X	X	X	X	X
Button type remote diaphragm seal										
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character										
High pressure side	H									
<b>Size</b> - 7 <sup>th</sup> character										
1 in.		M								
<b>Mounting connection type</b> - 8 <sup>th</sup> character										
3 1/4 in. flange extended – type 91				A						
3 1/2 in. flange extended – type 91 modified				B						
1 1/2 in. 16N-2 threaded union – type 92				C						
Bracket – type 89				D						
Universal – type 90				E						
1 1/2 in. 12NF threaded union – type 92 modified				F						
<b>Diaphragm Material</b> - 9 <sup>th</sup> and 10 <sup>th</sup> characters										
Hastelloy C-276	NACE			HL						
<b>Capillary Protection</b> - 11 <sup>th</sup> character										
AISI 316 L ss armour						A				
AISI 316 L ss armour with PVC protective cover						B				
<b>Capillary Length m (Feet)</b> - 12 <sup>th</sup> character										
1 (3)							A			
1.5 (5)							B			
2 (7)							C			
2.5 (8)							D			
3 (10)							E			
<b>Fill Fluid</b> - 13 <sup>th</sup> character										
Silicone oil PMX 200 10 cSt (-40 to 250 °C; -40 to 480 °F)								S		
Silicone oil for high temperature (-10 to 375 °C; 14 to 707 °F)								G		
Mineral oil Esso Marcol 152 (FDA approved)	(Note 1)							W		
<b>Option</b> - 14 <sup>th</sup> character										
None									1	
Jack out collar for seal removal for process (not for type 89)	(Note 2)								2	
<b>Gasket</b> - 15 <sup>th</sup> character										
None										1
Aluminium										E
AISI 316 ss										F

Note 1: Suitable for food application

Note 2: Not available with mounting connection types code D

## BASIC ORDERING INFORMATION model S26UN Union connection remote diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	<b>S 2 6 U N</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Union connection remote diaphragm seal									
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character									
High pressure side		H							
<b>Size</b> - 7 <sup>th</sup> character									
1 1/2 in.			L						
<b>Diaphragm Material</b> - 8 <sup>th</sup> and 9 <sup>th</sup> characters									
AISI 316 L ss	NACE		SL						
Hastelloy C-276	NACE		HL						
<b>Capillary Protection</b> - 10 <sup>th</sup> character									
AISI 316 L ss armour						A			
AISI 316 L ss armour with PVC protective cover						B			
<b>Capillary Length m (Feet)</b> - 11 <sup>th</sup> character									
1 (3)							A		
1.5 (5)							B		
2 (7)							C		
2.5 (8)							D		
3 (10)							E		
3.5 (12)							F		
4 (13)							G		
4.5 (15)							H		
5 (17)							J		
<b>Fill Fluid</b> - 12 <sup>th</sup> character									
Silicone oil PMX 200 10 cSt (-40 to 250 °C; -40 to 480 °F)							S		
Silicone oil Baysilone PD5 5 cSt (-85 to 250 °C; -121 to 480 °F)							P		
Inert oil - Galden G5 (Oxygen service) (Note 1)							N		
Inert oil - Halocarbon 4.2 (Oxygen service) (Note 1)							D		
Silicone oil for high temperature (-10 to 375 °C; 14 to 707 °F)							G		
Silicone polymer Syltherm XLT (-100 to 100 °C; -148 to 212 °F)							C		
Mineral oil Esso Marcol 152 (FDA approved) (Note 2)							W		
Vegetable oil Neobee M-20 (FDA approved) (Note 2)							A		
Glycerin-water 70% (FDA approved) (Note 2)							B		
<b>Process Fitting Connections</b> - 13 <sup>th</sup> character									
Not required								1	
AISI 316 ss weld bushing								3	
Chemical tee flange								4	
<b>Gasket</b> - 14 <sup>th</sup> character									
Not required									1
Silicone rubber									5
PTFE									8

Note 1: Suitable for oxygen service

Note 2: Suitable for food application

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model S26PN urea service remote diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters	<b>S 2 6 P N</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Urea service remote diaphragm seal									
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character									
High pressure side		H							
Low pressure side		L							
<b>Size / Mounting Flange Rating / Material</b> - 7 <sup>th</sup> character									
3 in. / ASME 600 RF integral flange / AISI 316 L ss Urea Grade			H						
2 in. / ASME 2500 threaded flange / Carbon steel			J						
<b>Extension length / diameter</b> - 8 <sup>th</sup> character									
40.3 mm (1.59 in.) / 69 mm (2.71 in.) (Note 1)				R					
40.3 mm (1.59 in.) / 94 mm (3.7 in.) (Note 1)				S					
131 mm (5.16 in.) / 37.5 mm (1.47 in.) (Note 2)				T					
<b>Diaphragm Material</b> - 9 <sup>th</sup> and 10 <sup>th</sup> characters									
AISI 316 L ss Urea Grade					SM				
<b>Capillary Protection</b> - 11 <sup>th</sup> character									
AISI 316 L ss armour						A			
AISI 316 L ss armour with PVC protective cover						B			
<b>Capillary Length m (Feet)</b> - 12 <sup>th</sup> character									
1 (3)							A		
1.5 (5)							B		
2 (7)							C		
2.5 (8)							D		
3 (10)							E		
3.5 (12)							F		
4 (13)							G		
4.5 (15)							H		
5 (17)							J		
5.5 (18) (Note 1)							K		
6 (20) (Note 1)							L		
<b>Fill Fluid</b> - 13 <sup>th</sup> character									
Silicone oil PMX 200 10 cSt (-40 to 250 °C; -40 to 480 °F)								S	
Silicone oil for high temperature (-10 to 375 °C; 14 to 707 °F)								G	
<b>Certification</b> - 14 <sup>th</sup> character									
None									1
Huey test									3

Note 1: Not available with Size/Mounting flange code J

Note 2: Not available with Size/Mounting flange code H

## BASIC ORDERING INFORMATION model S26KN Pulp and paper diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1st to 5th characters		<b>S 2 6 K N</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
Pulp and paper diaphragm seal									
<b>Transmitter Side of Connection</b> - 6th character									
High pressure side			H						
<b>Size / Mounting connection</b> - 7th character									
1 in. pulp and paper seal - sealing with gaskets to spud (NOT AVAILABLE WITH SENSOR F AND S)				U					
1 1/2 in. pulp and paper seal - sealing with gasket to spud (NOT AVAILABLE WITH SENSOR S)				K					
1 in. pulp and paper seal with 1 in. NPT male threaded connection (NOT AVAILABLE WITH SENSOR F)				W					
1 1/2 in. pulp and paper seal with 1 1/2 in. NPT male threaded connection				Z					
1 in. pulp and paper seal with G 1 in. A male threaded connection (NOT AVAILABLE WITH SENSOR F)				1					
1 1/2 in. pulp and paper seal with G 1 1/2 in. A male threaded connection				2					
1 in. pulp and paper seal with ball valve connection (NOT AVAILABLE WITH SENSOR F AND S and 266NDH)				Y					
1 1/2 in. pulp and paper seal - sealing with gasket to M44 threaded spud (NOT AVAILABLE WITH SENSOR S)				V					
<b>Diaphragm Material</b> - 8th and 9th characters									
AISI 316 L ss		(Note 1)		SL					
Hastelloy C-276				HL					
Diaflex (AISI with anti-abrasion treatment)		(Note 1)		FL					
<b>Capillary Protection</b> - 10th character									
Extension tube for direct mount seal						N			
<b>Capillary Length m (Feet)</b> - 11th character									
Direct-mount construction							1		
<b>Fill Fluid</b> - 12th character									
Silicone oil PMX 200 10 cSt (-40 to 250 °C; -40 to 480 °F)								S	
Mineral oil Esso Marcol 152 (FDA approved)		(Note 5)						W	
<b>Clamp/Fittings</b> - 13th character									
Not required									N
Weld-on spud and fixing screw for 1 in. pulp & paper seal connection		(Note 2)							C
Weld-on threaded spud for 1 1/2 in. pulp & paper seal connection		(Note 3)							D
Weld-on spud and fixing screws for 1 1/2 in. pulp & paper seal connection		(Note 4)							F

Note 1: Not available with connection code Y

Note 2: Suitable ONLY for 1 in. size - sealing with gaskets code U

Note 3: Suitable ONLY for 1-1/2 in. size to M44 threaded spud - sealing with gaskets code V

Note 4: Suitable ONLY for 1-1/2 in. size - sealing with gaskets code K

Note 5: Suitable for food application

# Model 266DRH Differential

## Model 266HRH Gauge

## Model 266NRH Absolute

### BASIC ORDERING INFORMATION model S26JN In-line diaphragm seals

Select one character or set of characters from each category and specify complete catalog number.

<b>BASE MODEL</b> - 1 <sup>st</sup> to 5 <sup>th</sup> characters			<b>S 2 6 J N</b>	<b>X</b>	<b>X</b>	<b>XX</b>	<b>X</b>	<b>X</b>	<b>X</b>
In-line diaphragm seal									
<b>Transmitter Side of Connection</b> - 6 <sup>th</sup> character									
High pressure side				H					
<b>Size / Mounting connection</b> - 7 <sup>th</sup> character									
DN 25 / 1 in.					A				
DN 40 / 1 1/2 in.					B				
DN 50 / 2 in.					C				
DN 80 / 3 in.					D				
<b>Diaphragm Material</b> - 8 <sup>th</sup> and 9 <sup>th</sup> characters									
AISI 316 L ss		NACE				SM			
Hastelloy C-276		NACE				HM			
<b>Capillary Protection</b> - 10 <sup>th</sup> character									
Extension tube for direct mount seal							N		
<b>Capillary Length m (Feet)</b> - 11 <sup>th</sup> character									
Direct-mount construction								1	
<b>Fill Fluid</b> - 12 <sup>th</sup> character									
Silicone oil PMX 200 10 cSt	(-40 to 250 °C; -40 to 480 °F)								S
Silicone oil Baysilone PD5 5 cSt	(-85 to 250 °C; -121 to 480 °F)								P
Inert oil - Galden G5	(Oxygen service)	(Note 1)							N
Inert oil - Halocarbon 4.2	(Oxygen service)	(Note 1)							D
Silicone oil for high temperature	(-10 to 375 °C; 14 to 707 °F)								G
Silicone polymer Syltherm XLT	(-100 to 100 °C; -148 to 212 °F)								C
Mineral oil Esso Marcol 152	(FDA approved)	(Note 2)							W
Vegetable oil Neobee M-20	(FDA approved)	(Note 2)							A
Glycerin-water 70%	(FDA approved)	(Note 2)							B

Note 1: Suitable for oxygen service

Note 2: Suitable for food application



### IMPORTANT REMARK FOR ALL MODELS

THE SELECTION OF SUITABLE WETTED PARTS AND FILLING FLUID FOR COMPATIBILITY WITH THE PROCESS MEDIA IS A CUSTOMER'S RESPONSIBILITY, IF NOT OTHERWISE NOTIFIED BEFORE MANUFACTURING.

### NACE COMPLIANCE INFORMATION

- (1) The materials of constructions comply with metallurgical recommendations of NACE MR0175/ISO 15156 for sour oil field production environments. As specific environmental limits may apply to certain materials, please consult latest standard for further details. AISI 316/316 L, Hastelloy C-276, Monel 400 also conform to NACE MR0103 for sour refining environments.
- (2) NACE MR-01-75 addresses bolting requirements in two classes:
  - Exposed bolts: bolts directly exposed to the sour environment or buried, encapsulated or anyway not exposed to atmosphere
  - Non exposed bolts: the bolting must not be directly exposed to sour environments and must be directly exposed to the atmosphere at all times.

266DRH bolting identified by "NACE" are in compliance with requirements of NACE MR0175 when considered "exposed bolting".

® Hastelloy is a registered trademark of Haynes International  
® Monel and Inconel are registered trademarks of Special Metals Corporation  
® Viton is a registered trademark of E.I. DuPont de Nemour  
® PMX 200 and Syltherm are registered trademarks of Dow Corning Corporation  
® Galden is a registered trademark of Solvay Group  
® Halocarbon is a registered trademark of Halocarbon Products Co.  
® Baysilone is a registered trademark of Bayer  
® Neobee is a registered trademark Stepan Specialty Products, LCC  
® Esso Marcol 152 is a registered trademark Esso Italiana  
® HART and WirelessHART are registered trademarks of HART Communication Foundation  
® PROFIBUS is a registered trademark of Profibus International  
™ FOUNDATION Fieldbus is a trademark of Fieldbus Foundation

Model 266DRH Differential  
Model 266HRH Gauge  
Model 266NRH Absolute



# Contact us

## **ABB Ltd.**

### **Industrial Automation**

Howard Road  
St. Neots  
Cambridgeshire PE19 8EU  
UK

Tel: +44 (0)1480 475321

Fax: +44 (0)1480 217948

## **ABB Inc.**

### **Industrial Automation**

125 E. County Line Road  
Warminster  
PA 18974  
USA

Tel: +1 215 674 6000

Fax: +1 215 674 7183

## **ABB Automation Products GmbH**

### **Industrial Automation**

Schillerstr. 72  
32425 Minden  
Germany

Tel: +49 551 905 534

Fax: +49 551 905 555

## **ABB S.p.A.**

### **Industrial Automation**

Via Luigi Vaccani 4  
22016 Tremezzina (CO)  
Italy

Tel: +39 0344 58111

**[www.abb.com](http://www.abb.com)**

## **Note**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents - in whole or in parts - is forbidden without prior written consent of ABB.

Copyright© 2017 ABB

All rights reserved

3KXP200016R1001



Sales



Service



Software