

DPT300: three phase

single-function transducers

compact, long range
site configurable transducers





Accurate
class 0.2 or 0.5 & 1



USB
programming



Response time
~100-220 ms



Modbus RTU

DPT300 is a range of compact, configurable single measured transducers designed to meet the demanding needs of supply utilities and industrial applications. It offers accurate true RMS measurements for high efficiency with quick response time. It is equipped with up to four load-independent, galvanically-isolated analogue outputs that can be configured for desired input range and output curves. PT3 transducers comply with IEC 60688.

- Best in class response time
- Long range, site-configurable inputs and outputs
- Load-independent accuracy on all outputs
- Diagnostic LEDs
- Compact footprint

Measurement functions (Measurands)	Output type	Output range	No. of outputs	Accuracy class
Voltage, current, active power, reactive power, power factor	mA or V	±20 mA, 4-20 mA, 0-20 mA, ±10mA, ±5mA*, ±2mA*, ±5V, ±10V	2 or 4	0.2, 0.5, 1.0


*available in accuracy class 1.0
Power factor accuracy- ± 0.2 degree at nominal input range

DPT300: three phase


single-function transducers

Output curves


Curve A
Linear

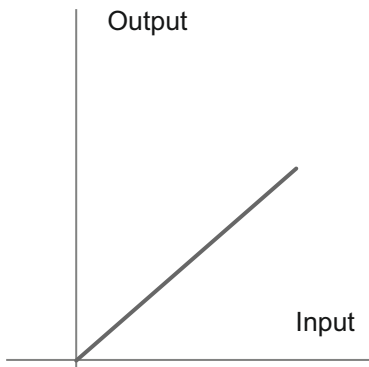


Curve B
Linear with live zero

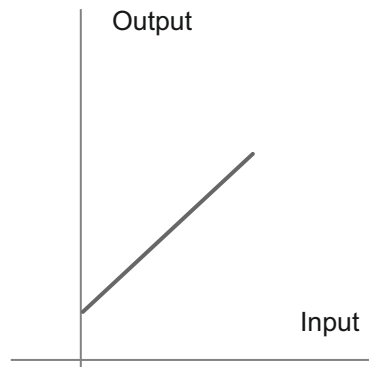


Curve C
Compressed upper region

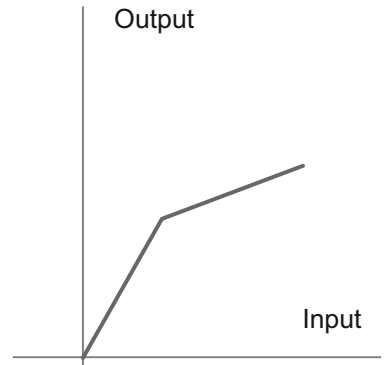


Curve D
Compressed lower region

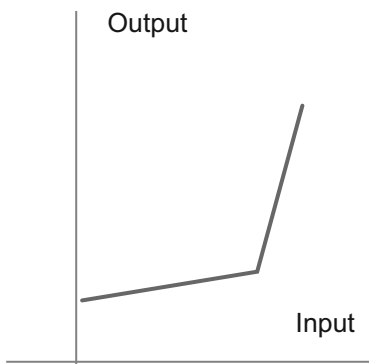


Curve E
Bipolar

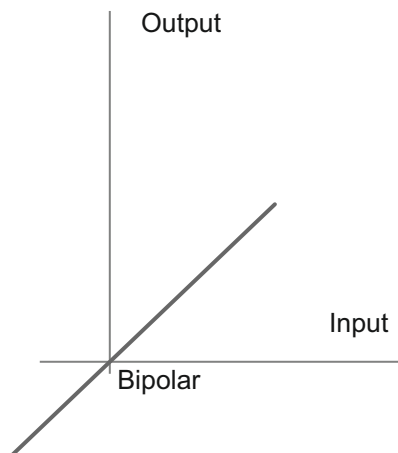


Curve F
bipolar with live zero

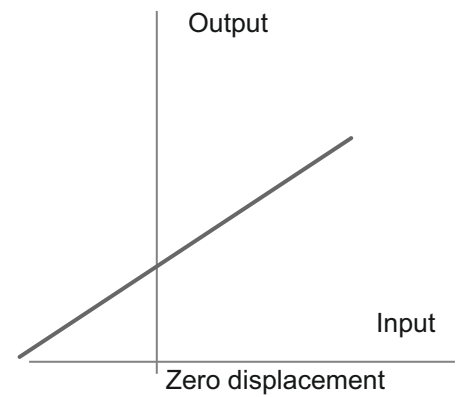


Mechanical dimensions

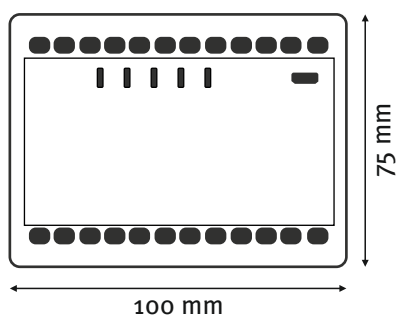

Front view

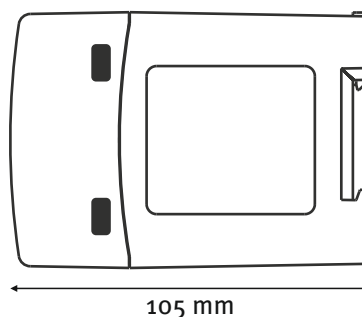

Side view

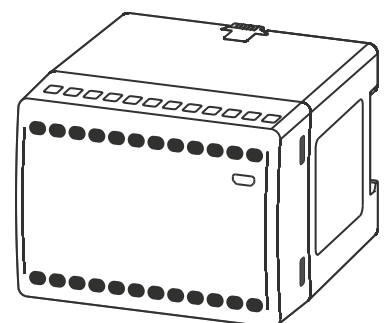

Isometric view

DPT300: three phase

Technical specifications

Variants

AC voltage

Nominal input (U_n)	3 x 100 to 415 V L-L (3-phase 3-wire system) 3 x 57.5 to 240V L-N (3-phase 4-wire system)
Measuring range	0 to 130 % of U_n (500 V max.)
Scale factor	0.8 to 1.3 (500 V max.)
Measurement frequency	50/60 Hz (± 5 %)
Burden	≤ 0.2 VA
Maximum overload voltage	1.3 x U_n continuously (500 V max.) 2 x U_n for 1 s, with up to 10 repetitions at 10 s intervals

AC current

Nominal input (I_n)	1/5 A
Measuring current range	0 to 150 % I_n
Scale factor	0.6 to 1.5 I_n
Burden	≤ 0.2 VA
Maximum overload current	2 x I_n continuously 20 x I_n for 1 s, with up to 10 repetitions at 100 s intervals

Active power /reactive power

Nominal input voltage (U_n)	3 x 100 to 415 V L-L (3-phase 3-wire system) 3 x 57.5 to 240V L-N (3-phase 4-wire system)
Input voltage range	0 to 130 % U_n (up to 500 V)
Nominal input current (I_n)	1/5 A
Input current range	0 to 150 % I_n
Measurement frequency	50/60 Hz (± 5 %)
Scale factor	0.5 to 1.5 of $U_n \times I_n$ primary (active power, at unity power factor) 0.3 to 1 $U_n \times I_n$ primary (reactive power, at reactive power factor > 0.8 or unity)

Power factor

Nominal input voltage (U_n)	3 x 100 to 415 V L-L (3 phase 3 wire system) 3 x 57.5 to 240V L-N (3 phase 4 wire system)
Input voltage range	0 to 130 % U_n (up to 500 V)
Nominal input current (I_n)	1/5 A
Input current range	0 to 150 % I_n
Measurement frequency	50/60 Hz (± 5 %)
Measurement range	-0.8 to +0.8
Accuracy	± 0.2 degree (at nominal range)

Auxiliary supply

High auxiliary

Nominal voltage range	80-276 V AC/DC (± 10 %)
Frequency	50/60 Hz
Maximum burden	≤ 11 VA, 6 W with two outputs at 750 Ω each ≤ 12 VA, 7 W with four outputs at 750 Ω each

Low auxiliary

Nominal voltage range	24-80 V DC (± 10 %)
Maximum burden	≤ 6 W with two outputs at 750 Ω each ≤ 8 W with four outputs at 750 Ω each

Analogue outputs

Type	Current (bipolar) & Voltage
Maximum load resistance	≤ 750 Ω for 20 mA, ≥ 2 k Ω for 10 V (for each output)
Response time	5 cycles measurement (≤ 100 -220 ms)
Ripple	< 0.4 % peak to peak

DPT300: three phase

Technical specifications

Temperature range

Operating temperature

-5 °C to +55 °C

Storage temperature

-25 °C to +70 °C

Physical

Dimension (W x H x D)

100 x 75 x 105 (mm)

Weight

0.7 kg (approx.)

Material

Fire-retardant polycarbonate (PC-FR, UL 94 V-0)

Mounting

DIN (EN 50022)

Connector type

Screw terminals

Conductor size for terminals

≤4 mm²

Environmental

Protection class

II (double insulation) EN 61010-1

Pollution degree

2

Installation category

CATIII

Protection degree

Protection housing IP 40, terminals IP 20

Standards compliance

Standards

IEC 60688, IEC 61010-1, IEC 61010-2-30,
IEC 61326-1, DIN 50022

Communication ports

Micro USB

For configuration

RS-485

Can be configured without auxiliary power

Baud rate

Modbus RTU enabled (suitable for integration with SCADA/PLC)

1200-38400 baud

Configuration software- Configview

ConfigView

For on-site configuration of measurement inputs, measurands, output curve and online parameter reading. It can be freely downloaded from www.ceweinstruments.se


Ordering key

DPT XX3-1YY

Example

DPT 623-126

where high auxiliary (6),
output nos. (2), accuracy class (2)
function active power(6)

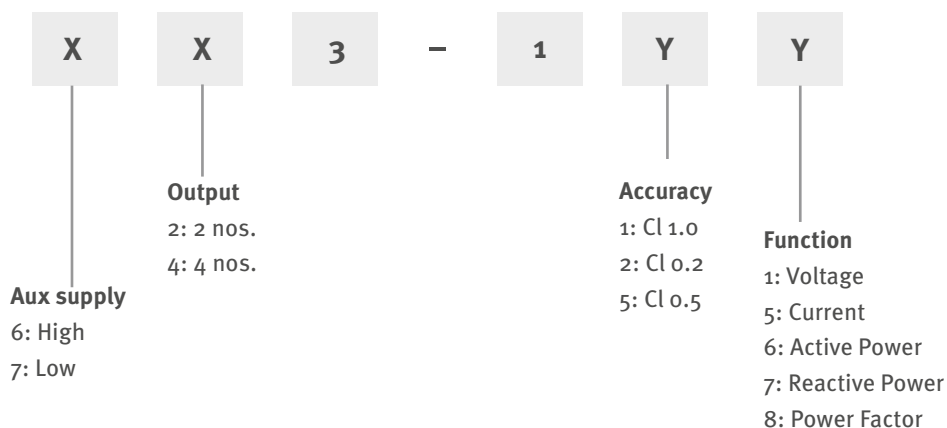

ELEXIM, a.s. | Riegrovo nám. 179/14 | 767 01 Kroměříž | Czech Republic

email: info@elexim.net | web: www.elexim.net | phone: +420 573 335 009